


# FRONT RACK QUICK START

How to correctly install your front rack

MAX Weight Capacity: 75lbs


## STEP 1

Remove the headlight using a 5mm allen wrench to unscrew the fixture. The fender will subsequently unattach. Reconnect the fender using the screw/washer that previously held in the headlight. Then unplug the cable connectors.

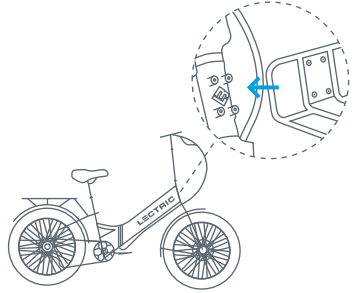


## STEP 2

Place the lowest end of the rack so that it sits above/parallel to the front tire, while aligning the 4 screw holes to the insertion points located on the bike's head tube harness – so that the wiring harness does not interfere with any turning movements.

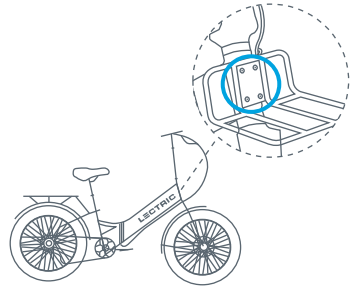


## STEP 3

Use the hook, located above the screw holes of the front rack, to secure the wiring harness – so that the wiring harness does not interfere with any turning movements

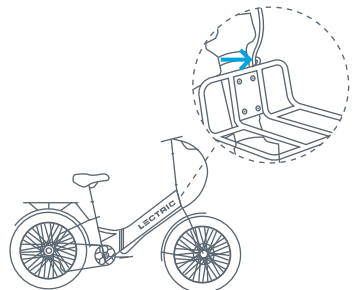


## STEP 4

Use a 5mm allen wrench to install the screws/washers.

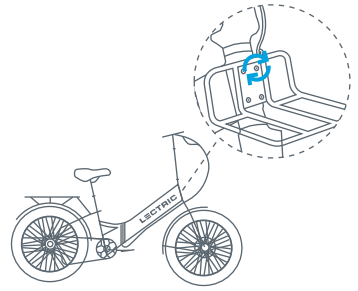


## STEP 5

Reinstall the headlight by turning it upside down and attaching it to the insertion hole located at the front/bottom of the front rack. Then use a 5mm allen wrench to fasten the screw/washer to the headlight.

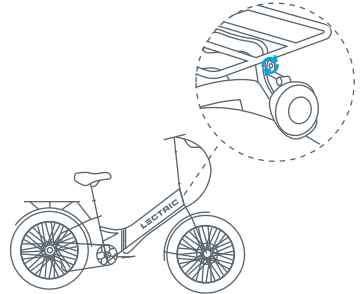

## STEP 6

Install the cable connector extension cord so that it runs through the center of the suspension fork.

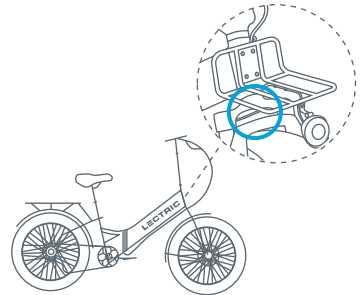

## STEP 7

Install the cable clips to fasten the cable onto the grooves located under the front rack.

