


REAR RACK QUICK START

How to correctly install your rear rack

MAX Weight Capacity: 55lbs

STEP 1: REMOVE THE TAILLIGHT


- Follow the cable from the taillight, cut the zip ties and pull apart the quick plug connection.
- Using a 4mm Allen key, remove the taillight bracket from the bike frame. Then, remove the light from the taillight bracket with a 4mm Allen wrench.

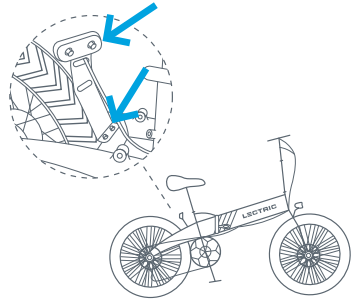

STEP 2: MOUNT REAR RACK

In order to mount the rear rack straight, the 4 bolts must be tightened in intervals.

- Use a 4mm allen key to mount the rear rack. Secure the rack at the insertion points diagonally.
- Begin tightening the bolt on the **right** side of the wheel as you tighten the bolt **left** of the taillight mounting point. Do not tighten all the way.
- Insert the bolts on the **left** side of the wheel and the **right** side of the taillight mounting point and tighten these halfway.
- Continue tightening the bolts in intervals diagonally to mount the rear rack straight.

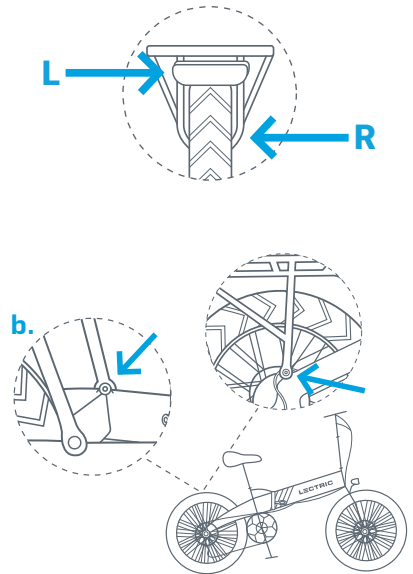

STEP 3: MOUNT TAILLIGHT TO RACK

- Using the two bolts on the back of the taillight, mount the light to the back of the rear rack.
- Secure the quick plug/wire along the rack with a zip tie and replug the connection.

