




## SH-SYSTEMVIEW 10

## SYSTEMVIEW 10" TABLET WITH BRACKET

### DESCRIPTION

This SystemView 10 inch tablet has a slim and sleek profile for easy mounting. It is equipped with an advanced processor for smooth and high-speed performance. The android tablet features a large capacitive touch screen for easy viewing. The SystemView 10 is a perfect (low-cost) solution for rugged monitoring in cabinets or as a graphics viewer for web servers.

### DIMENSIONS

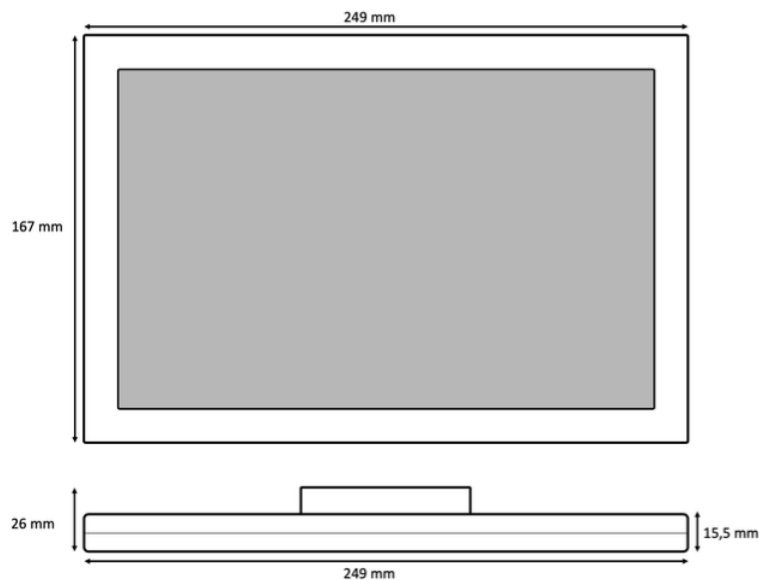

## TECHNICAL DATA

ITEM	DESCRIPTION
<b>Supply Voltage</b>	12Vdc
<b>Power Consumption</b>	1500mA
<b>Solution</b>	Allwinner A83T processor
<b>CPU</b>	8-core ARM Cortex A7 CPU, 1.2 Ghz
<b>Display</b>	10.1 Inch IPS Display, Resolution : 1280 x 800, Brightness : 350 nit , Ratio : 16:10
<b>RAM</b>	2GB
<b>Nand Flash</b>	8GB
<b>Sound System</b>	1W x 1 , With Speaker tunnel
<b>Operating temp. range</b>	0°C to 50°C
<b>Operating Humidity</b>	10% to 95% RH non-condensing
<b>Software Features :</b>	
<b>System</b>	Google Android 6.0.1
<b>Video</b>	H.264 2160p video decoding, Multi-format FHD video decoding, including Mpeg1/2, Mpeg4 SP/ASP GMC, H.263, H.264, VP6/8, AVS jizun, Jpeg/Mjpeg,etc. H.264 High Profile 1080p@30fps or 720@60fps encoding 3840 x 1080@30fps 3D decoding, BD/SBS/TAB/FP supported
<b>Audio</b>	Complies with RTSP, HTTP, HLS, RTMP, MMS streaming media protocols
<b>Language</b>	Integrated Hi-Fi 100dB audio codec, Dual Analog mic amplifiers
<b>Customized soft</b>	Support Multi-languages
<b>Interfaces : Back</b>	Auto Run Systemview Application software when it is booted
<b>: Bottom</b>	- Ethernet Interface (RJ45) - USB Port2.0, MICRO USB (OTG) - USB Socket - DC IN Power Terminal (9V~30V) - Power On/Off Button, Pin Hole for Reboot
<b>Network : Bluetooth</b>	Bluetooth v2.1+EDR/ Bluetooth 3.0/3.0+HS/4.0
<b>WiFi</b>	WiFi 802.11 b/g/n
<b>LAN Port</b>	Ethernet RJ45
<b>Mounting</b>	Integrated bracket For Wall Mounting and metal clips for metal door mounting