



TOSIBOX

DESCRIPTION

The next generation Plug & Go connectivity device.

TOSIBOX® Lock 500 is a high-end connectivity device bringing unprecedented possibilities for customers to manage their operations and to build new IoT solutions. The Lock 500 is ideal for demanding industrial environments and opens up new opportunities in security and office networking sectors.

The new Lock 500 is compatible with all existing TOSIBOX® products. Modularity of the products enables easy and fast extension of networks.

MAIN FEATURES

High performance

- Massive VPN throughput for data consuming applications, end-to-end encryption between TOSIBOX® devices
- Up to 50 concurrent VPN connections

Reliability

- Integrated WiFi as connectivity method or access point for wireless devices on site.
- Built-in LTE modem (optional), with two modem variants covering most of the globe – no external modem needed
- Dual-SIM slots for operator redundancy allows for even more reliable connectivity
- TosiOnline™ automatic reconnection of dropped connections

Industrial design

- 2/2 x Digital I/O for controlling and monitoring of Lock status
- Robust and fanless enclosure, integrated DIN rail bracket and industrial screw-on DC power connector

Simple

Build and manage secure IoT infrastructure in minutes

Secure

Tested & audited security

Modular

Unlimited expandability and flexibility

Timeless


Deals with legacy and future systems

Unique

Globally patented point-to-point connection

TOSIBOX Lock 500

DIMENSIONS

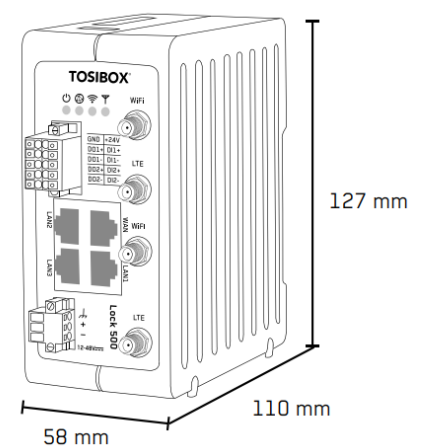

TECHNICAL DATA

ITEM	DESCRIPTION
PORTS	<ul style="list-style-type: none"> • 1 x USB 2.0, type A • 1 x RJ-45 WAN connection, 10/100 Mb/s, auto-negotiation (MDI / MDI-X) • 3 x RJ-45 LAN connection, 10/100 Mb/s, auto-negotiation (MDI / MDI-X) • LAN3 can be assigned as Service connection, 10/100 Mb/s, auto-negotiation (MDI / MDI-X) • Ethernet port isolation: 1500 Vrms 1 minute (when device frame connected to system ground potential)
CONNECTIONS	<ul style="list-style-type: none"> • 12-48V DC (+/-20%), reverse polarity protected • Device frame connector • 2 x WiFi antenna connector, RP-SMA • (TBL5i*) 2 x LTE antenna connectors, SMA • 2 x Digital Input, 2 x Digital Output, 24V DC out • DIN rail attachment (back) • Maximum power consumption 10W
WAN Connection Features TBL5iB*	<ul style="list-style-type: none"> • Independent of operating systems • Works in all Internet connections (operator independent) • Supports HTTP proxy servers with and without authentication • Firewall friendly • Works with dynamic, static and private IP addresses • Built-in firewall, NAT • Up to 50 concurrent VPN connections • VPN throughput up to 70 Mbit/s
MOBILE Connection Features	<ul style="list-style-type: none"> • TosiOnline™ Automatic network recovery that recovers from most mobile operator and modem problems • Region: APAC • LTE Cat-6 • Up to 300 Mbps DL, 50 Mbps UL • Frequency Bands (4G LTE): B1, B3, B5, B7, B8, B18, B19, B21, B28, B38, B39, B40, B41 • Dual SIM
WLAN	<ul style="list-style-type: none"> • IEEE 802.11 b/ g/ n, max. 150 Mbps • WEP, WPA-PSK, WPA2-PSK, WPA-PSK/WPA2-PSK Mixed, WPA-EAP, WPA2-EAP TKIP/AES encryption • Frequency 2.412 – 2.462 GHz, 11 channels • Output power 20 dBm max
INCLUDED ACCESSORIES	<ul style="list-style-type: none"> • RJ-45 Cat5e Ethernet cable • 2 x WiFi antennas, 2 dBi • I/O connector plug • Power connector plug • TBL5*PS: AC adapter - Input 100 – 240 V AC, frequency 47 – 63 Hz, Output 12.0 V, 1.6 A, max 19.2 W. EU, UK, AU and US power socket • TBL5iB*: APAC Modem • TBL5i*: 2 x LTE antennas
I/O SPECIFICATIONS	<ul style="list-style-type: none"> • 2 x digital inputs, galvanic isolation, current limited to <5mA, Voltage 0 - 32V nom. >12V is interpreted as '1', 0-5V is '0' • 2 x digital outputs, 24V DC, 50 mA current shared by the outputs and 24V DC out • 1 x 24V DC out, 50 mA current shared by 24V DC out, output 1 and output 2 • Software Configurable I/O state
PHYSICAL PROPERTIES	<ul style="list-style-type: none"> • 110 mm x 58 mm x 127 mm (L x W x H) • Storage temperature -40 °C ... +70 °C • Protection class IP20
TBL5i*	<ul style="list-style-type: none"> • Weight 505 g (net weight article) • Operating temperature -20 °C ... +60 °C

8 Hope St, Melrose Park, NSW 2114
(02) 9804 6366 | sales@regulatoraustralia.com.au

regulatorautomation.com.au

© Copyright Regulator Australia Pty Ltd. Due to our policy of continuous striving towards manufacturing excellence and design development, we reserve the right to change details or specifications without notice. While every effort is made to ensure accuracy at the time of publication, we shall not be held liable for any errors or omissions, implied or otherwise.

