

AUTOMATIC WATCHES

This timepiece is equipped with a self-winding Mechanical Automatic movement.

It does not need a battery. It is powered by the motions of the user's own wrist during the wear of the watch automatically. You may also choose to wind the watch manually.

Before wearing your watch, make sure to wind it clockwise with 20 rotations of the crown.


For good measure gently move the watch side to side around 30 times to see the seconds hand run at its normal speed.

Please make sure to remember that during a period when you are not wearing the watch, the power reserve of movement will wear down and you will have to re-wind the watch again before wearing.


PLEASE READ THE FOLLOWING BEFORE UNSCREWING THE CROWN

SCREW-DOWN CROWN

This watch is equipped with a screw down crown . Do not pull the crown unless it is unscrewed first.




TO UNSCREW: Turn the crown anti-clockwise until it turns freely without tension. Gently pull the crown out to the other desired positions for watch setting (see specific operating instructions on the following pages).



TO SCREW: Push the crown all the way in (towards the watch) then begin to turn clockwise until it is securely screwed down.

Note: Failure to securely screw down the crown after setting the watch may affect its water resistance.

AUTOMATIC 3 HANDS WITH INNER TURNING BEZEL

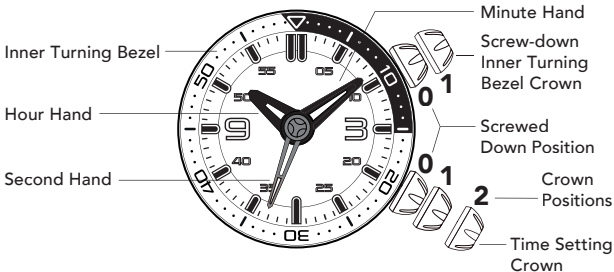

If your watch has a screw down crown feature, release the watch from the screw-down position before setting.


TIME SETTING

1. Pull the crown out to position 2, its maximum extension. The second hand will stop moving.
2. Turn the crown either clockwise or anti-clockwise until the watch hands are positioned at the desired time.
3. When the desired time is reached push the crown back to position 1 and screw down if applicable.

NOTE: When the hour hand passes 12 o'clock and the date changes, the watch is set at midnight. If the date does not change, it is set at noon.


HOW TO USE INNER BEZEL TO CHECK ELAPSED TIME

1. To release the upper crown by turning it anti-clockwise. Then turn it anti-clockwise, the inner bezel turns clockwise.
2. Align the mark "▼" of the inner bezel with the position of the minute hand (white minute hand).
3. Then read the scale above the inner bezel, to which the minute hand points so as to figure out the elapsed time (gray minute hand).
4. Screw-down the inner turning bezel crown after use.



HOW TO USE INNER BEZEL TO CHECK REMAINING TIME

1. To release the upper crown by turning it anti-clockwise. Then turn it anti-clockwise, the inner bezel turns clockwise.
2. Set the mark "▼" of the inner bezel to the scheduled time (time ahead during setting).
3. By reading the scale on the inner bezel, you can now see the amount of time that remains until the scheduled point (gray minute hand).
4. Screw-down the inner turning bezel crown after use.



NOTE: Please do not use the inner turning bezel function while the timepiece is in contact with water. Water can enter the case causing damage to the movement.