



How to Repair a Flow Style Bleed-Down Valve

#11331

These instructions will demonstrate how to replace components of a Flow Style Bleed-Down Valve with kit #11331

Written By: Adam Dumas



INTRODUCTION

Hypertherm is in no way affiliated with the above mentioned manufacturer

TOOLS:

- 5/8" wrench (1)
- 3/4" wrench (1)
- 7/8" wrench (1)
- 13/16" wrench (1)
- 1-1/16" wrench (1)
- 1-1/4" wrench (1)

PARTS:

- Repair Kit #11331 (1)
- Seal Hoop #11323 (included in kit) (1)
- Needle #11322 (included in kit) (1)
- Seal #11321 (included in kit) (1)
- Bushing #11324 (included in kit) (1)
- High-Vacuum Grease #11447 (included in kit) (1)
- Oil Seal #11359 (included in kit) (1)
- Seat #11325 (included in kit) (1)
- O-ring #12880-908 (included in kit) (1)
- O-ring #12880-912 (included in kit) (1)
- O-ring #11679-114 (included in kit) (1)
- O-ring #11680-114 (included in kit) (1)
- Piston Assembly #11778 (1)
- Actuator Housing #11779 (1)
- Valve Body #11594 (1)
- Outlet Adapter #11742 (1)
- Collar #13157-60-6 (1)
- Mounting Collar #11780 (1)
- 3/8" to 1/4" Adapter #11394 (1)
- Blue Goop #11111 (1)
- O-ring Lube #13969 (1)
- Isopropyl Alcohol (1)


Step 1 — How to Repair a Flow Style Bleed-Down Valve #11331



⚠ Always make sure that all high-pressure water has been removed from the valve by following the machine manufacturers' safety instructions. Failure to do so can cause severe injury or death.

- Turn OFF all hydraulic and water pressure to the bleed-down valve.
- Loosen the hydraulic hose from the hydraulic fitting using a 7/8" and 3/4" wrench.

Step 2

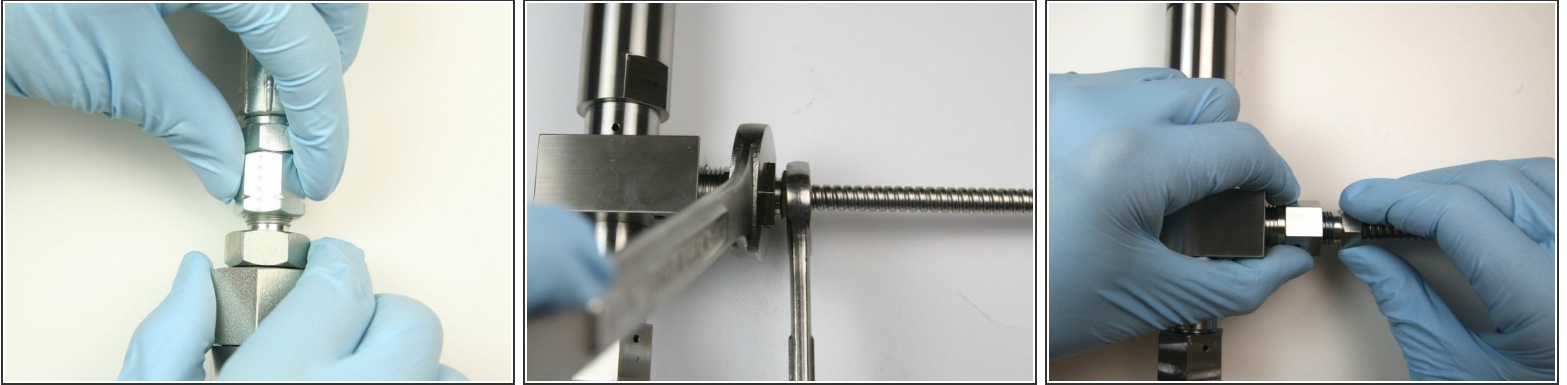

- Unthread the hydraulic hose from the hydraulic fitting.
- Loosen the gland nut on the high-pressure tubing at the high-pressure inlet port of the bleed-down valve using a 13/16" and 5/8" wrench.
- Unthread the gland nut from the outlet fitting at the high-pressure inlet port of the bleed-down valve.

Step 3



- Clean the gland nut of all Blue Goop with isopropyl alcohol or a similar cleaning agent.
- Loosen the gland nut from the outlet fitting (connected to the valve body) using a 13/16" and 5/8" wrench.
- Unthread the gland nut from the outlet fitting (connected to the valve body).

Step 4



- Clean the gland nut of all the Blue Goop.
- Loosen the hydraulic fitting from the adapter fitting using a 1-1/4" and 7/8" wrench.
- Unthread the hydraulic fitting from the adapter fitting.

Step 5




- Apply an O-ring lubricant to the O-ring from the kit for the hydraulic fitting.
- Replace the O-ring around the hydraulic fitting with the O-ring from the kit (the smallest O-ring from the kit).
- Loosen the adapter fitting from the actuator housing using a 1-1/4" and 1-1/16" wrench.

Step 6




- Unthread the adapter fitting from the actuator housing.
- Apply an O-ring lubricant to the largest O-ring from the kit.
- Replace the O-ring on the adapter fitting with the largest O-ring from the kit.

Step 7

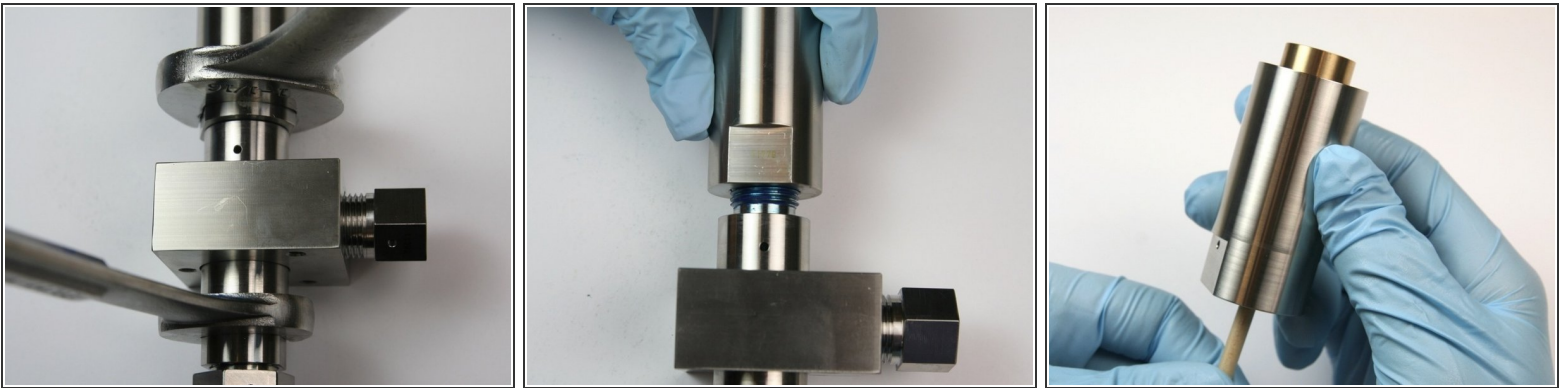

- Loosen the actuator housing from the [valve body](#) using a 1-1/16" and 7/8" wrench.
- Unthread the actuator housing from the valve body.
- Push the [piston](#) out of the actuator housing through the oil port using the included dowel.

Step 8

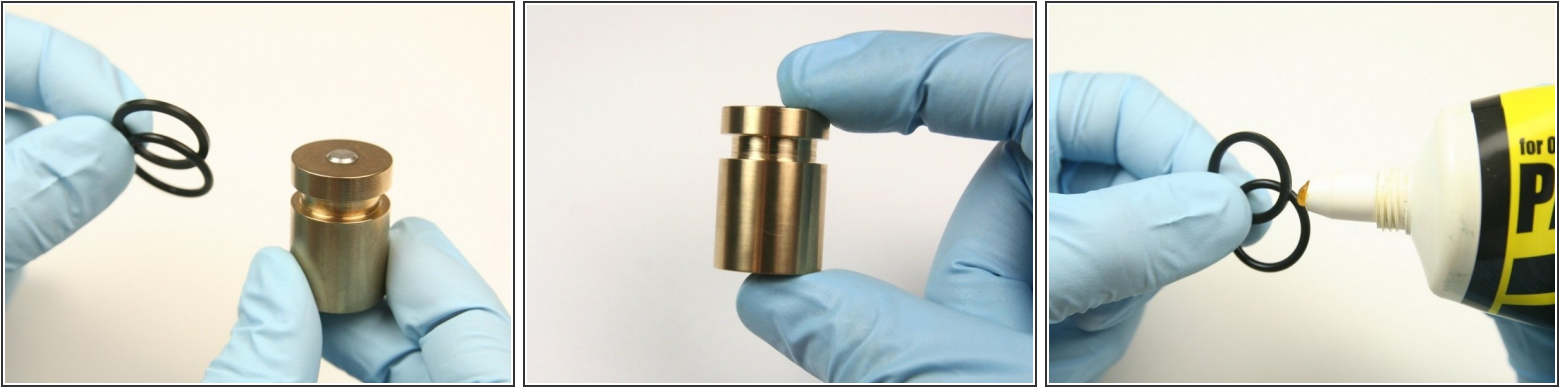


- Discard the O-ring and the back-up ring from the piston.
- Inspect the piston, if damage is visible, replace.
- Apply an O-ring lubricant to cover all of the O-ring and the back-up ring.

Step 9




- Slide the new back-up ring (flat) to the groove of the piston.
- Slide the new O-ring (rounded) to the groove of the piston.
- ⓘ Make sure the concave side of the back-up ring is towards the O-ring.
- Put the piston assembly into the actuator housing the the groove side first and push the piston with the included dowel until the piston bottoms out.

Step 10

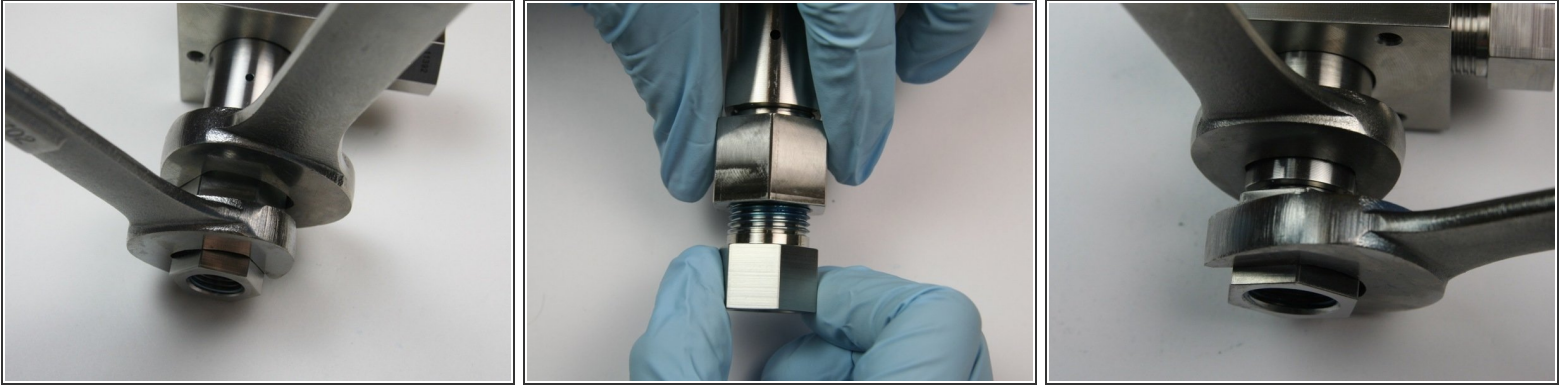

- Loosen the 3/8" to 1/4" adapter from the [outlet fitting](#) using a 7/8" and 13/16" wrench.
- Unthread the 3/8" to 1/4" adapter from the outlet fitting.
- Loosen the outlet fitting from the bleed down valve body using a 7/8" and 13/16" wrench.

Step 11

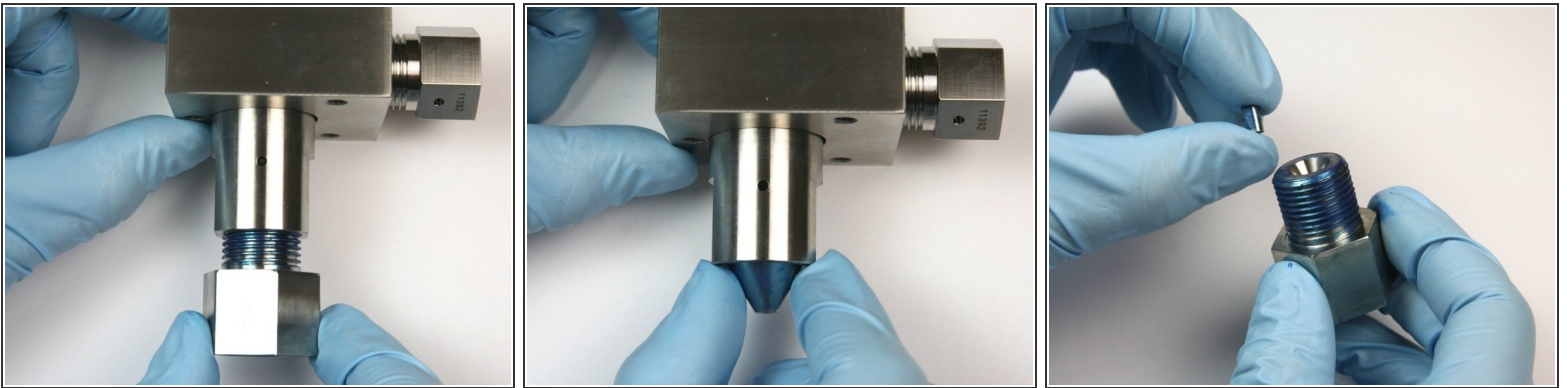


- Unthread the outlet fitting from the bleed down valve body.
- Remove the [high-pressure seat](#) from the bleed down valve body.
- Remove the [flow reducer](#) from the outlet adapter.

Step 12




- Clean the outlet adapter of all the Blue Goop.
- Clean the high-pressure seat of all the Blue Goop.
- With the bleed down valve tool push through the bleed-down valve body to remove all components.
- ⓘ The oil seal can also be removed by the bleed down valve tool.

Step 13

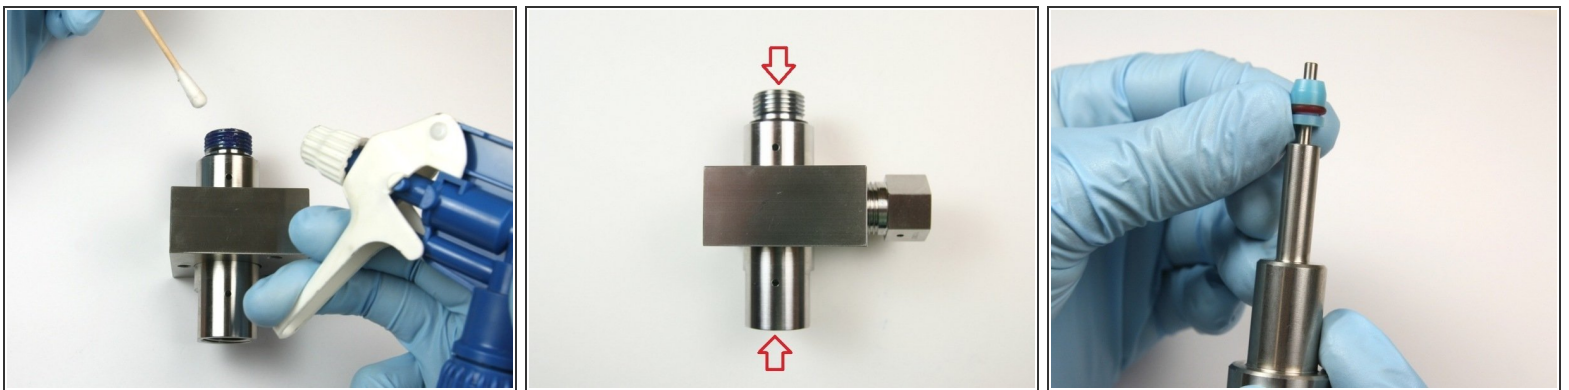


- Thoroughly clean the valve body before replacing the components.
- Visually inspect the top/bottom of the valve body, if excessive wear or cracks are visible, replace the [valve body](#).
- Put the [high-pressure seal](#) on to the bleed-down valve tool with the O-ring towards the bleed down valve tool.

Step 14

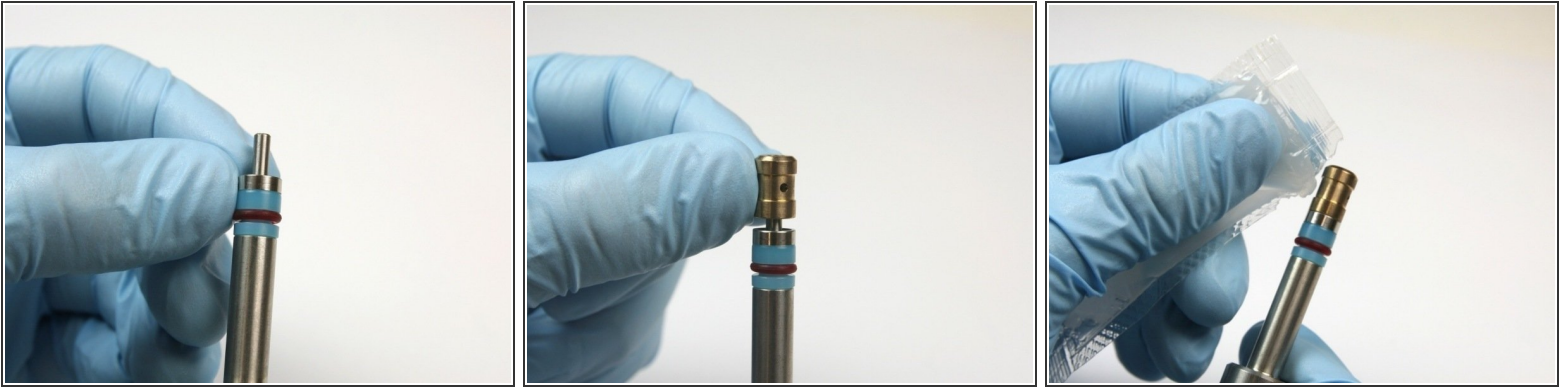


- Slide the [hoop](#), with the sharp edge first, on to the bleed-down valve tool behind the high-pressure seal.
- Slide the [bushing](#) on the bleed-down valve tool with the chamfer side away from the hoop.
- Apply a [high-pressure lubricant](#) to the high-pressure seal, hoop, and bushing.
- ⓘ The O-ring on the high-pressure seal can pinch or strip when installing into the valve body.

Step 15


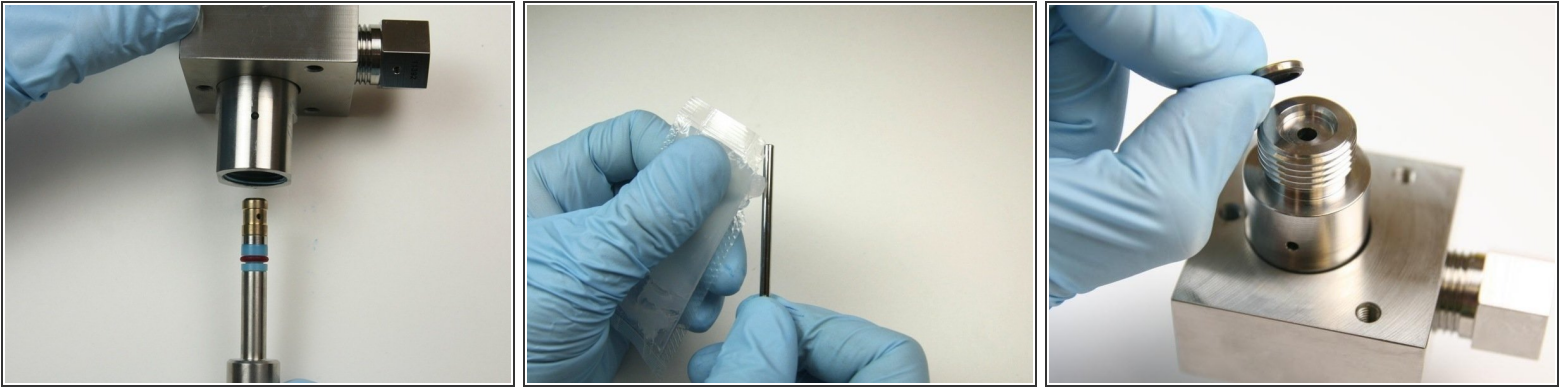


- Put the bleed-down valve tool with the parts into the bottom of the valve body until the tool reaches the bottom of the valve.
- ⚠ Be aware that the inner diameter of the valve body has a small step, it can pinch or strip the O-ring from the high-pressure seal during installation.
- Apply a high-pressure lubricant to the stem.
- Replace the [oil seal](#), place on the top of the valve body.
 - Put the concave (rubber) side down towards the valve body.



Step 16

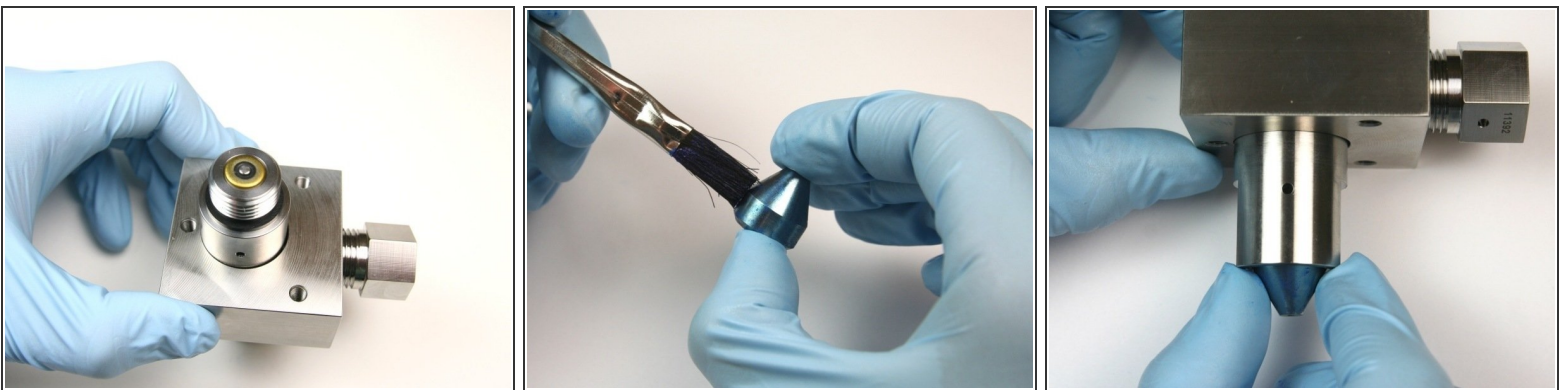

- Put the stem through the high-pressure seal until it is flush with the oil seal.
- Apply Blue Goop to all surfaces of the high-pressure seat.
- Put the high-pressure seat at the bottom of the bleed-down valve body with the pointed end out.

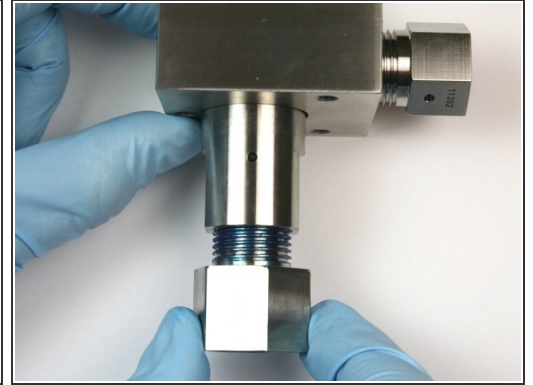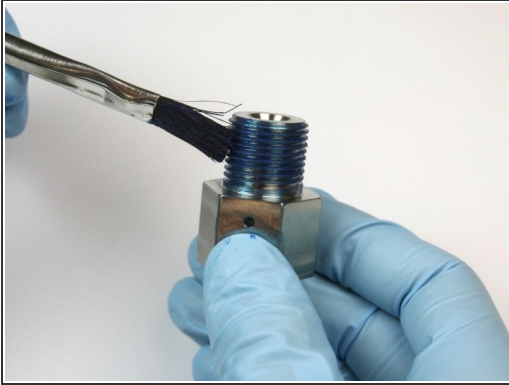
Step 17

- Apply Blue Goop to the outlet adapter threads.
- Put the flow reducer in the outlet adapter.
- Thread the outlet adapter into the valve body.

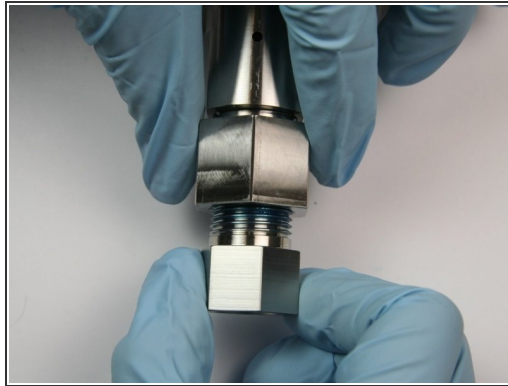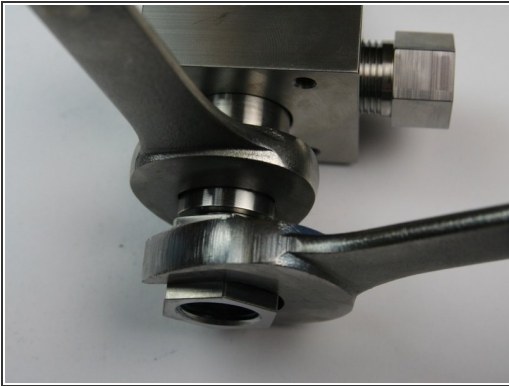Step 18

- Tighten the outlet adapter to the valve body using a 7/8" and 13/16" wrench.
- Thread the 3/8" to 1/4" adapter to the outlet adapter.
- Tighten the 3/8" to 1/4" adapter to the outlet adapter using a 7/8" and 13/16" wrench.

Step 19

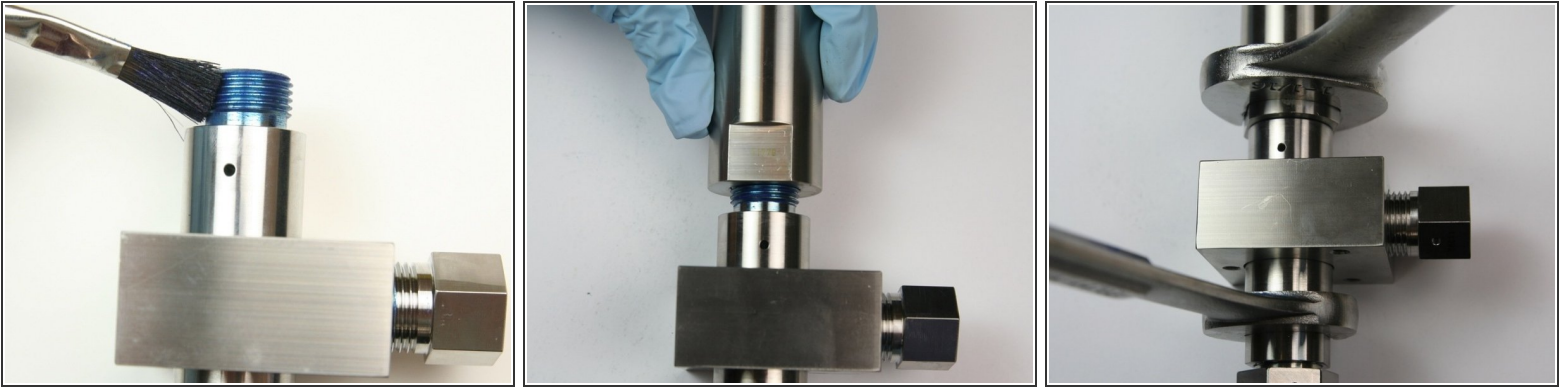


- Apply Blue Goop to the top threads of the valve body.
- With the piston assembly installed, thread the actuator housing onto the valve body.
- Tighten the actuator housing to the valve body using 1-1/16" and 7/8" wrench.

Step 20



- Thread the adapter fitting into the actuator housing.
- Tighten the adapter fitting into the actuator housing using 1-1/4" and 1-1/16" wrench
- Thread the hydraulic adapter into the adapter fitting.

Step 21

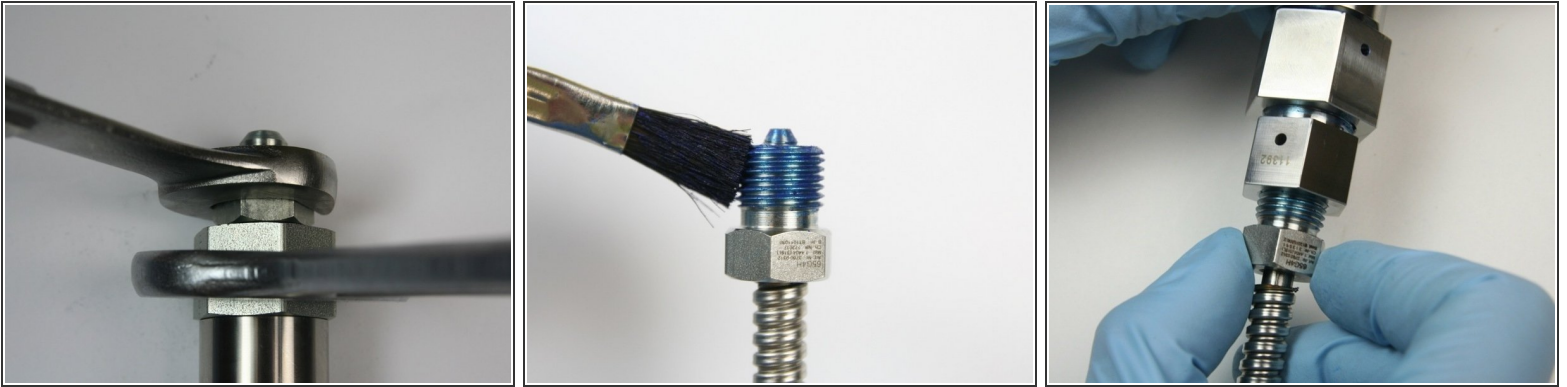

- Tighten the hydraulic fitting into the adapter fitting using 1-1/4" and 7/8" wrench.
- Apply Blue Goop to the threads of the gland nut.
- Thread the gland nut into the outlet fitting (connected to the valve body).

Step 22




- Tighten the gland nut to the outlet fitting (connected to the valve body) using 13/16" and 5/8" wrench.
- Apply Blue Goop to the gland nut threads.
- Thread the gland nut into the outlet fitting (connected to the collar).

Step 23



- Tighten the gland nut into the outlet fitting (connected to the collar) using a 13/16" and 5/8" wrench.
- Thread the hydraulic hose on to the hydraulic fitting.
- Tighten the hydraulic hose to the hydraulic fitting using a 7/8" and 3/4" wrench.

Step 24

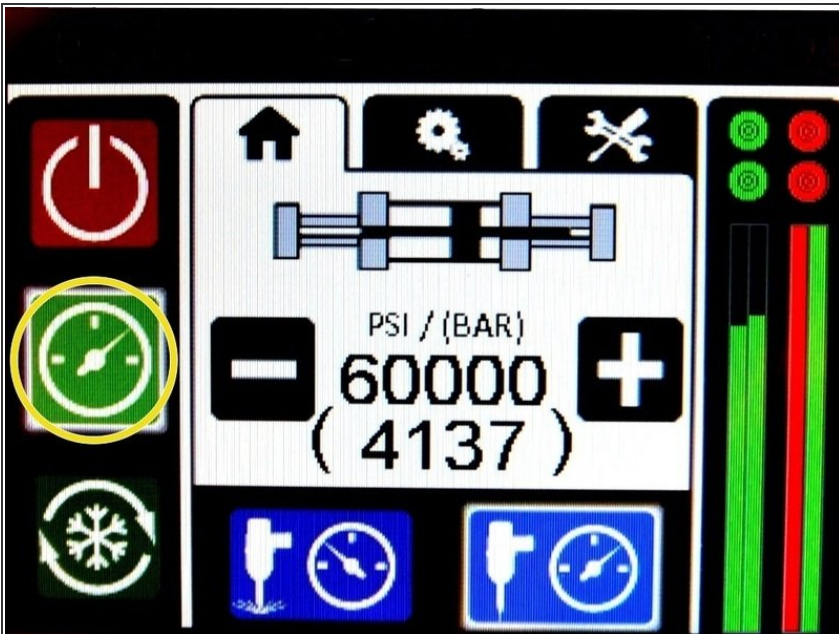

- Turn the pump ON and continue the cutting process.