
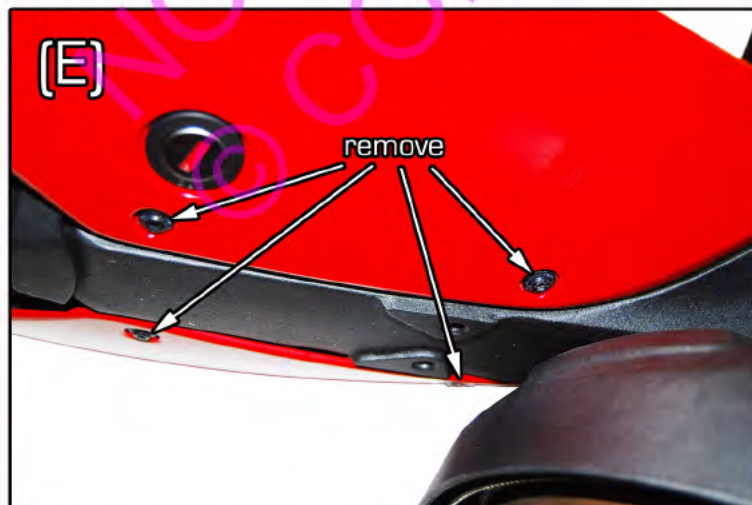
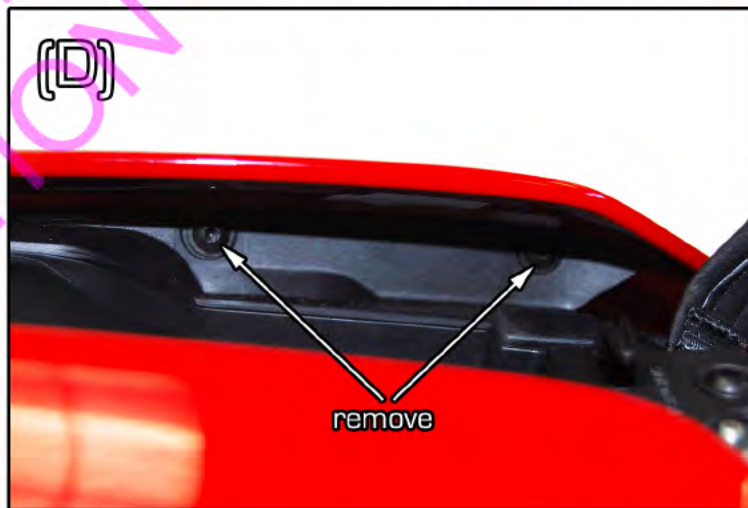
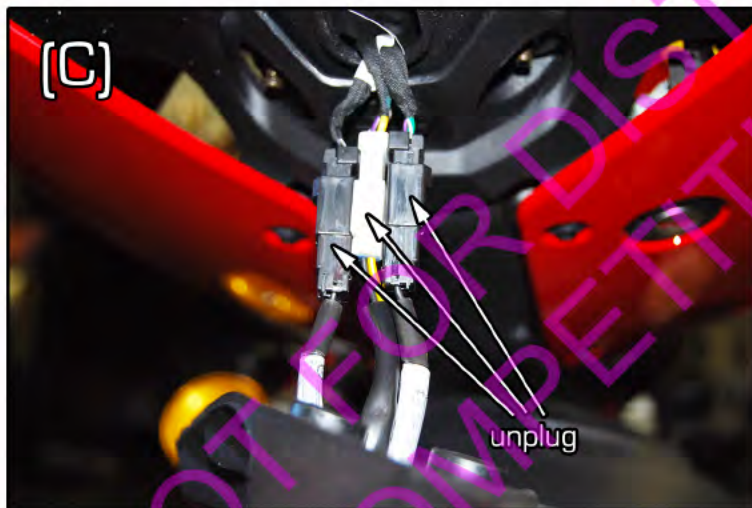


COMPETITION WERKES

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>


(800)736-2114

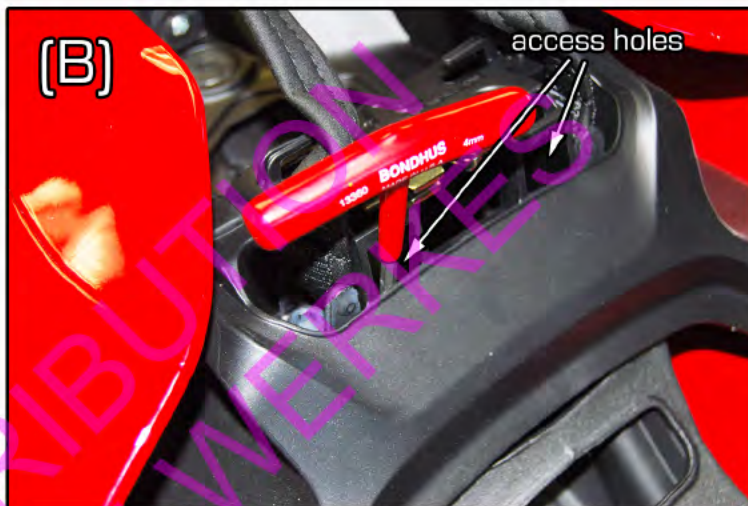

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1D1299

(G)

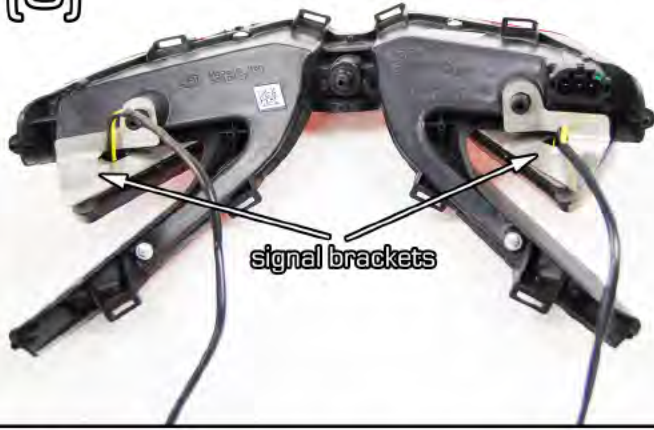

(H)



- REMOVAL:
- 1) Remove front seat [1- allen bolt near tank]. Remove rear seat (use key).
 - 2) Remove storage cover and tool kit.
 - 3) Lower rear fender [2- allen bolts shown in *FIG (A) and 2- allen bolts accessible through holes in *FIG (B)].
 - 4) Unplug wires shown in *FIG (C) and set fender aside.
 - 5) Remove painted tail pieces [2- allen bolts (per side) on inside of tail *FIG (D) and 4- allen bolts shown in *FIG E]. Disconnect seat latch cable on right side.
 - 6) Remove taillight from bike [1- phillips screw, 8 clips and unplug].

- ASSEMBLY:
- 1) Position Signal Brackets to posts on taillight as shown in *FIG (G).
 - 2) Adhere Turn Signals to Signal Brackets and taillight as shown in *FIG's (G) & (H).
 - 3) Adhere License Light to Cover Plate. *See main photo below.
 - 4) Cut white connector from stock fender leaving about 2" of wire. Connect white connector to supplied License Light (black to black, white to yellow) using supplied Butt Connectors.

- INSTALL:
- 1) Carefully study *FIG (F). The dotted line shows the area that needs to be removed for clearance. It's .25" deep by 1.5" wide. Inside of cut is to be 2.5" in from point shown in photo. We removed this section with a file. You can use any tool you're comfortable with. Don't stress, this will not be visible once kit is installed.
 - 2) Push taillight back onto tail of bike (align posts, clips, replace screw). Plug in taillight and turn signals routing wires as needed to conceal.
 - 3) Plug in white connector and position Cover Plate to subframe.
 - 4) Check lighting for proper function.
 - 5) Secure License Pan & Cover Plate to bike using 2- 5x35 Allen Bolts (5mm washers and 5mm nuts above).
 - 6) Mount your license plate using 4- 6x10 Allen Bolts/Washers/& 6mm Nuts.
 - 7) Replace painted tail pieces (seat latch cable), tool kit, storage cover, and seats.

PARTS LIST:

- 1- Cover Plate
- 1- License Pan
- 1- License Light
- 1- Pair Turn Signals
- 2- Signal Brackets
- 2- 5x35 Allen Bolts
- 2- 5mm Nuts
- 4- 6x10 Allen Bolts
- 4- 6mm Nuts
- 6- Washers
- 2- Butt Connectors



The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1D1299