



<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

- REMOVE: Seat, hugger fender (4- allen bolts), license plate mounting arm (2- allen bolts).
- CUT: License light wiring at location shown in \*FIG (A) and zip-ties as shown in \*FIG (B).
- PULL: Wire free from swingarm and route up through opening near tank. \*FIG (C).
- POSITION: Grab bar all the way out.
- REMOVE: Reflector (pry off with screwdriver) and remove residue with razor-blade.
- DRILL: 1/4" hole in center of dimple as shown in \*FIG (D)
- DRILL: 1/4" hole 1" below previous hole as shown in \*FIG (E).
- DRILL: 1/4" hole in vertical lip of undertail as shown in \*FIG (E).
- ADHERE: License Light to Main Pan and snip off wire ends.
- MOUNT: Main Pan to grab bar (lower hole) using 6x25 Allen Bolt. \*NOTE\* route the wires through the upper hole. Secure with a washer and nut on top.
- MOUNT: License plate with 6x10 Allen Bolts.
- ROUTE: Wires throuh the hole previously drilled in the undertail and connect using supplied Butt Connectors (black to black, white to yellow).
- CHECK: Lighting for proper function.
- REPLACE: Hugger fender and seat.



PARTS LIST:

1- Main Pan 1- License Light 1- 6x25 Allen Bolt 4- 6x10 Allen Bolts  
2- Butt Connectors 5- Washers 5- 6m Nuts



The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1DDVL

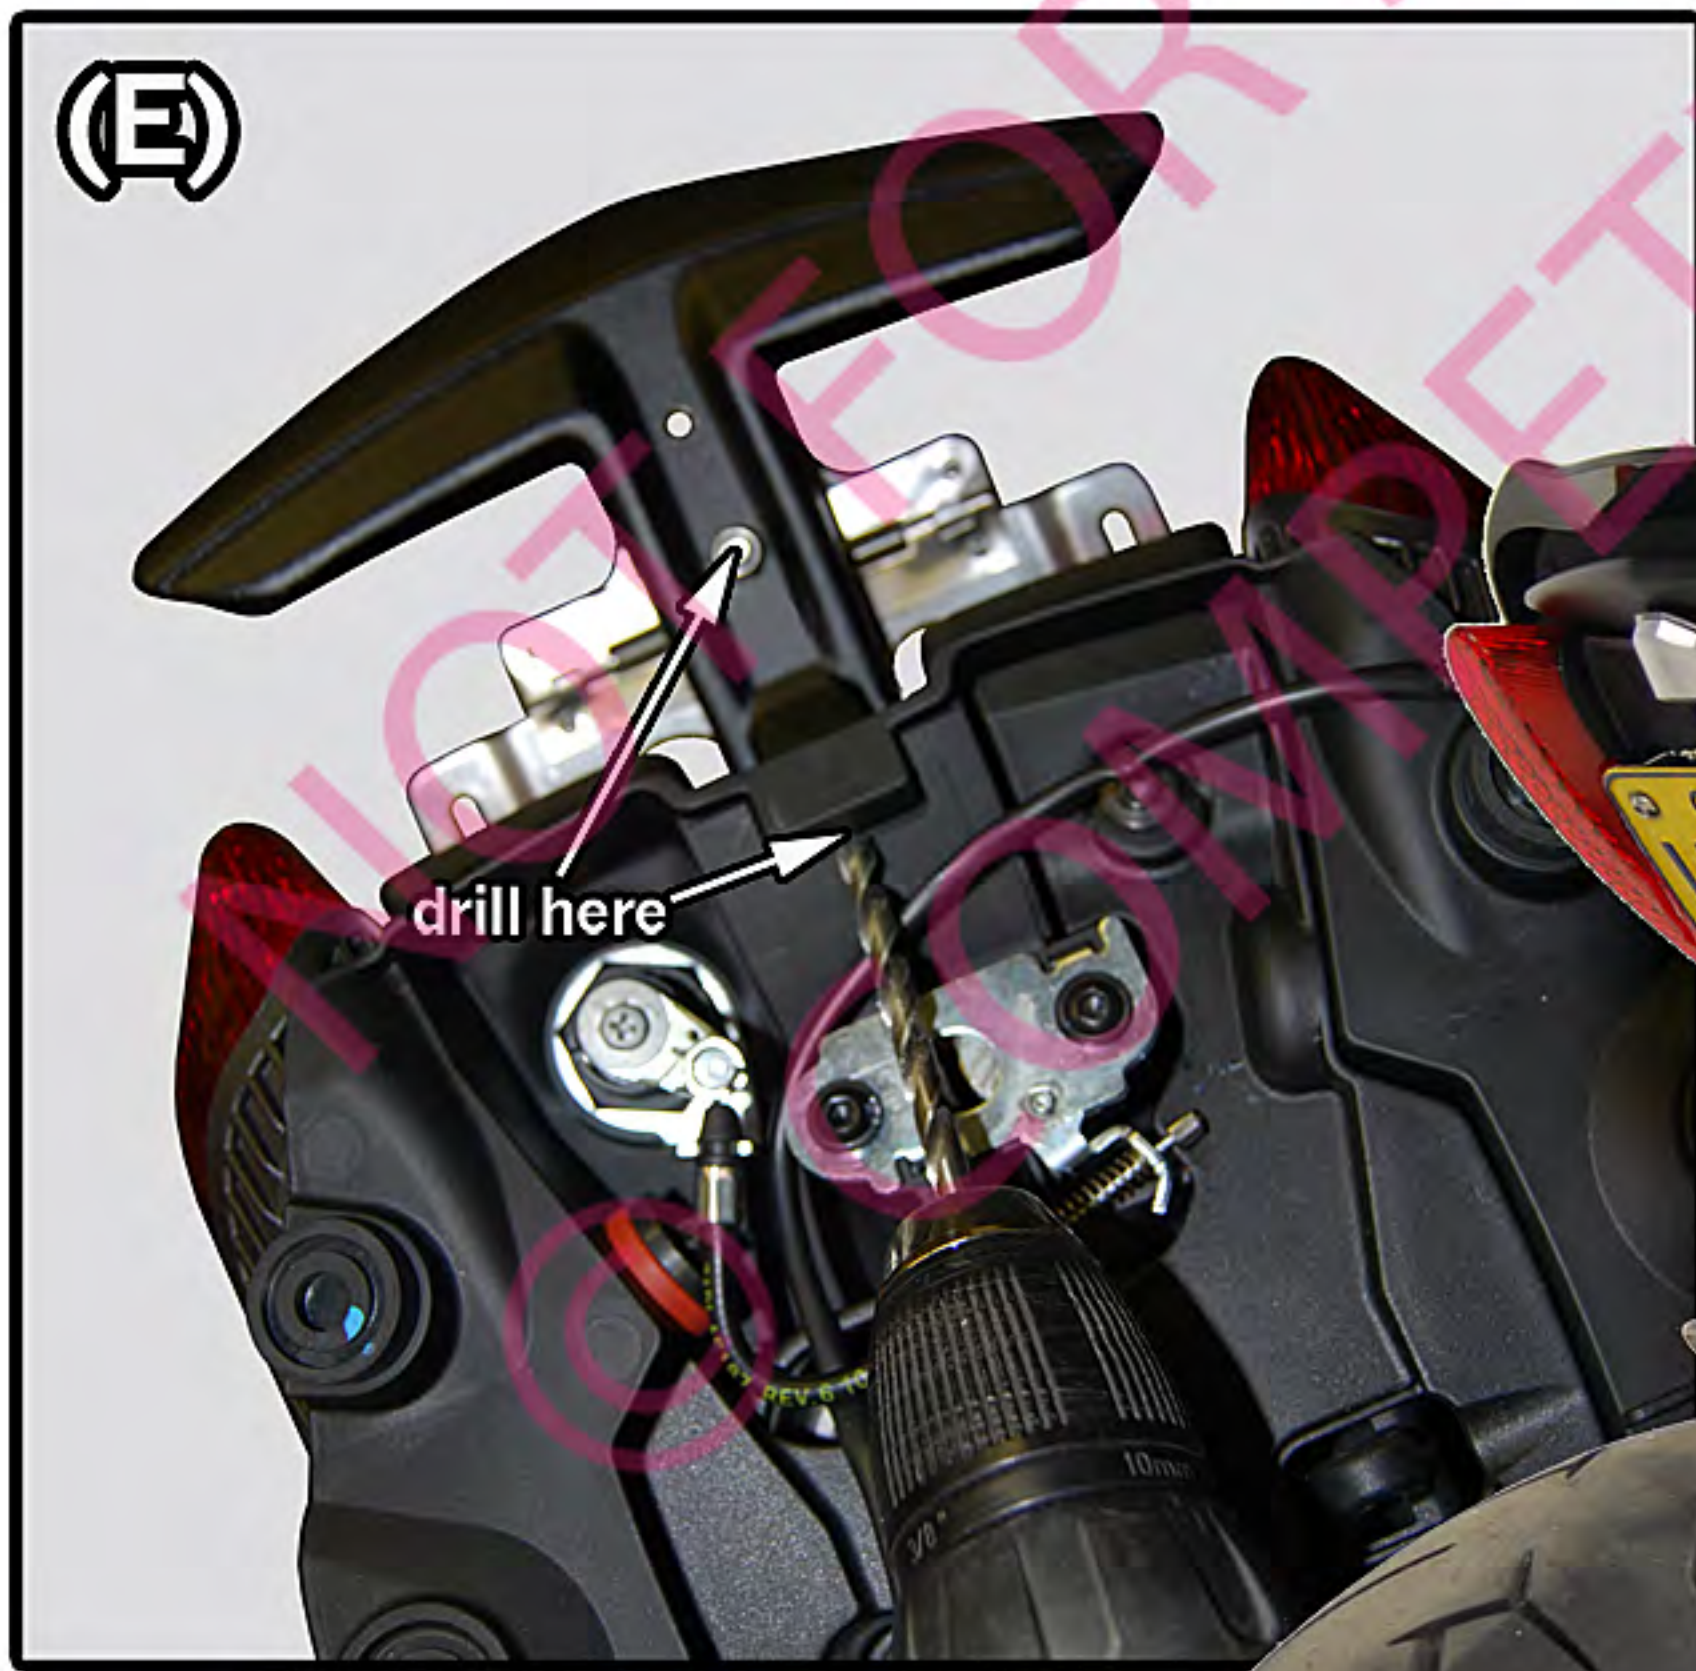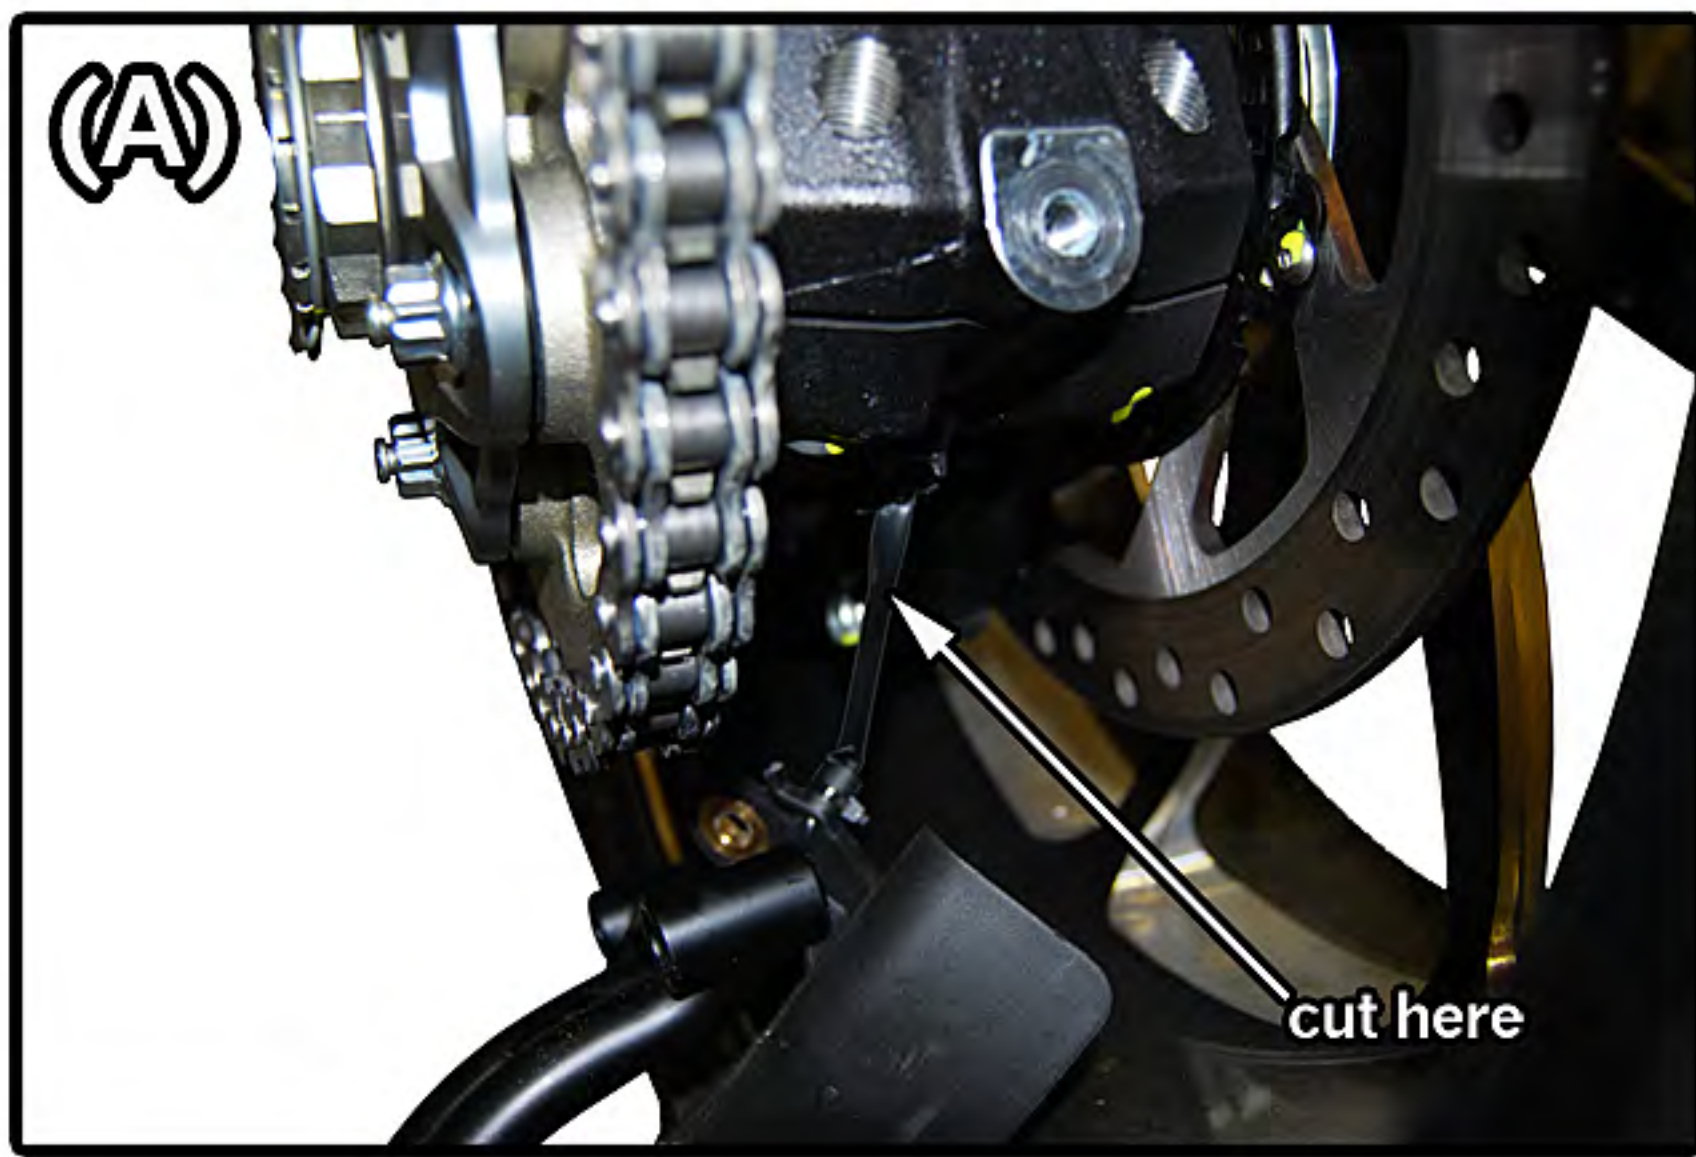

**dave**

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1DDVL