


# DUCAATI STREETFIGHTER FENDER ELIMINATOR

<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

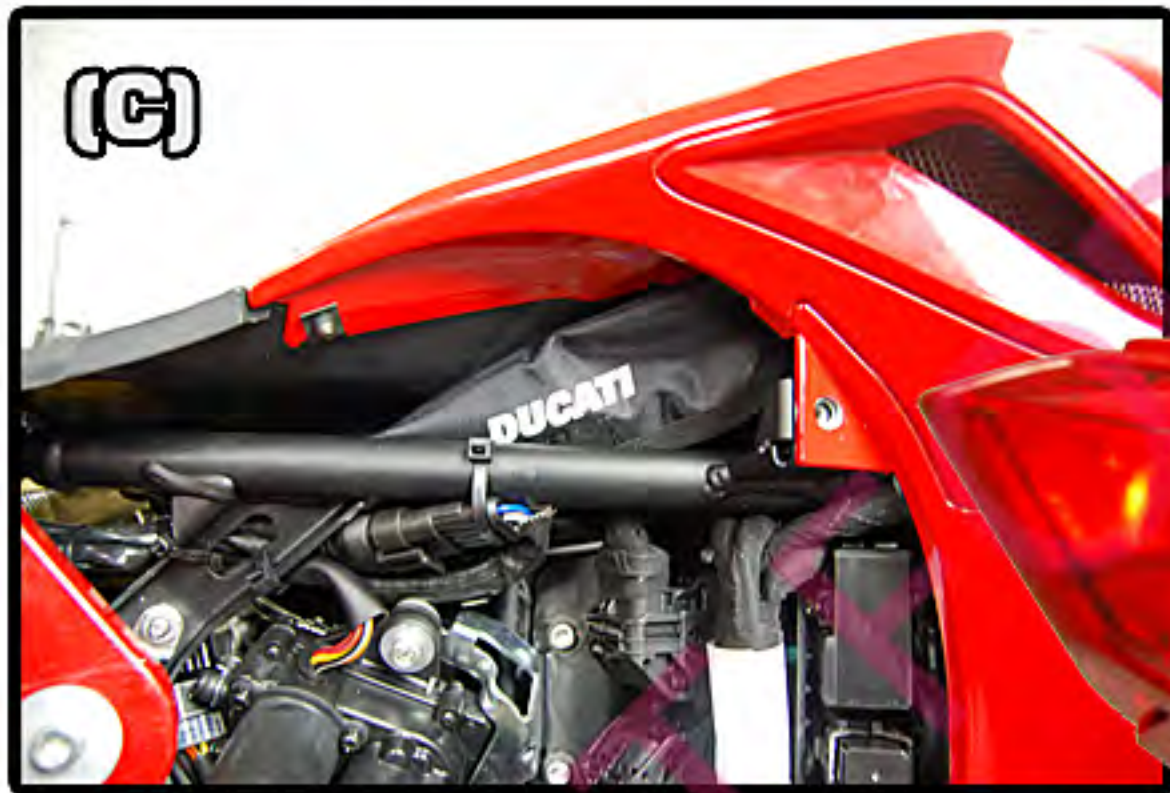

- REMOVE:** Front seat (2 allen bolts under corners), rear seat/cowl, storage tray (2 allen bolts, unplug wire), rear fender (remove back cover \*FIG (A) and unplug wiring), undertail (4 allen bolts, slide back), tail section (4 allen bolts on top, 4 allen bolts on bottom, unplug wires and cable, spread and lift).
- MOUNT:** Signal Brackets to subframe with Zip ties. \*FIG (B)
- ADHERE:** Signals to Signal Brackets. (connect wires under storage area)
- REMOVE:** Soft tool bag from tail section. (pull away from vel-cro)
- REPLACE:** Tail section. (connect wires and cable) \*NOTE\* make sure signal brackets stay in position. Place tool bag as shown \*FG (C).
- ADHERE:** License Light to Cover Plate. Route wires through undertail and connect. \*FIG (D) \*NOTE\* protect wires with electrical tape.
- POSITION:** All wires into sides of tailsection and slide undertail into place.
- SECURE:** Cover Plate and License Pan using supplied 6x16 Allen Bolts.
- CHECK:** Lighting for proper function.
- REPLACE:** Rear Seat/cowl, storage tray, and front seat with stock bolts.

**PARTS LIST:** 1- Cover Plate, 1- License Pan, 1- License Light, 2- Signal Brackets, 1- Pair of Flush Mount Signals, 4- 6x16 Allen Bolts, 2- Zip Ties, 4- 6x10 Allen Bolts, 4- 6mm Nuts, 4- Washers, 2- Spade Connectors

**COMPETITION  
WERKES**

**(800)736-2114**

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.