


DUCATI STREETFIGHTER FENDER ELIMINATOR

<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

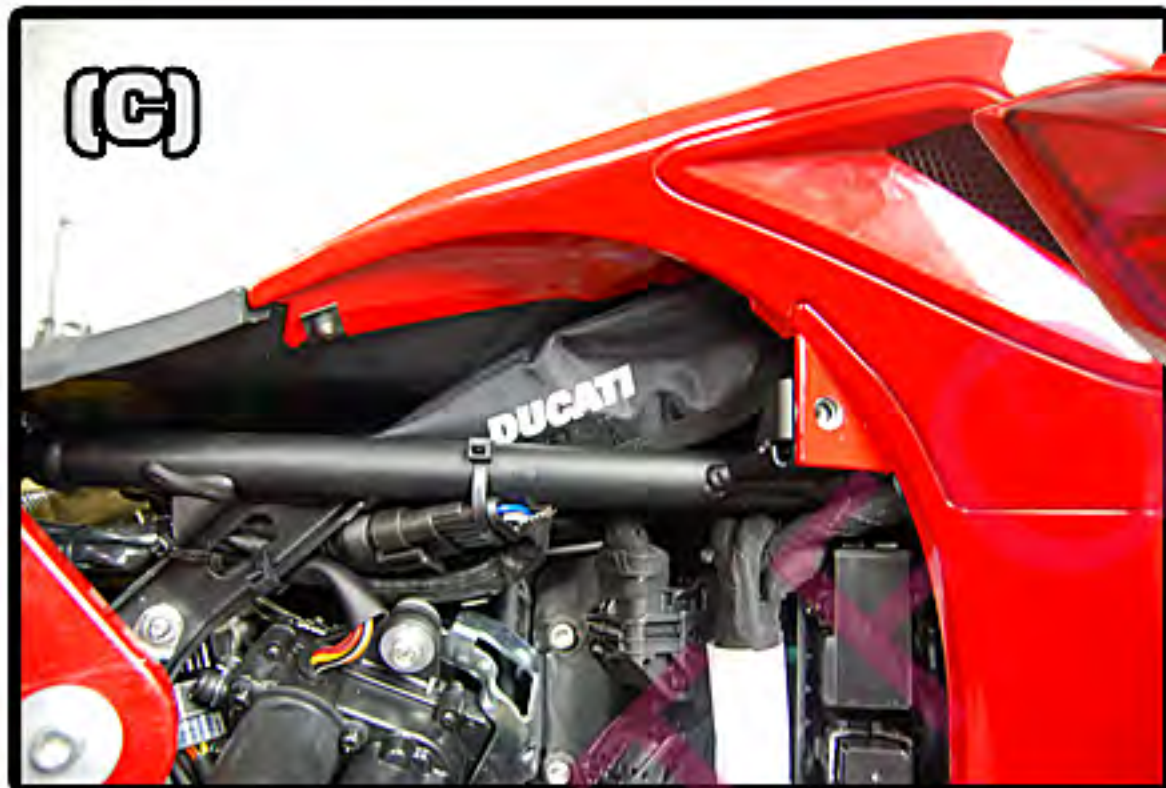

- REMOVE:** Front seat (2 allen bolts under corners), rear seat/cowl, storage tray (2 allen bolts, unplug wire), rear fender (remove back cover *FIG (A) and unplug wiring), undertail (4 allen bolts, slide back), tail section (4 allen bolts on top, 4 allen bolts on bottom, unplug wires and cable, spread and lift).
- MOUNT:** Signal Brackets to subframe with Zip ties. *FIG (B)
- ADHERE:** Signals to Signal Brackets. (connect wires under storage area)
- REMOVE:** Soft tool bag from tail section. (pull away from vel-cro)
- REPLACE:** Tail section. (connect wires and cable) *NOTE* make sure signal brackets stay in position. Place tool bag as shown *FG (C).
- ADHERE:** License Light to License Pan. *NOTE* Exchange bullet connectors for supplied Spade Connectors. Route wires through slotted vent in undertail and connect to stock terminals (protect w/ tape).
- MOUNT:** Undertail (slide into position and secure with stock hardware) and License Pan (use 5x12 Allen Bolts).
- CHECK:** Lighting for proper function.
- MOUNT:** Cover Plate using 6x16 Allen Bolts.

PARTS LIST:

- 1- License Pan
- 1- License Light
- 1- Cover Plate
- 2- Signal Brackets
- 1- Pair Flush Mount Signals
- 2- Zip Ties
- 4- 6x16 Allen Bolts
- 2- 5x12 Allen Bolts
- 4- 6x10 Allen Bolts
- 4- Washers
- 4- Nuts
- 2- Spade connectors



**COMPETITION
WERKES**
(800)736-2114

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1DSTFLTD