

06 HONDA CBR1000RR LTD Fender Eliminator Kit.

Remove: Rear seat, Front seat (2 - Allen bolts under corners), Tail section(4 - Allen bolts, unplug taillight wire).

Remove: Rear fender (2 - Bolts on each side, 1 - Allen bolt on-top) *FIG (B).

Unhook: Battery and remove. Place Backing plate in Battery tray, using Backing plate as a template drill 2 - 1/4" holes down through Battery tray. Remove bolt in battery area as shown. *FIG (E).

Adhere: License light to Main pan. Snip ends off License light.

Mount: Main pan. (Route License light wires up through empty bolt hole, secure with 2 - 6x10 Allen bolts down through Backing plate and Main pan nuts on bottom) *FIG (F).

Cut: Ends off stock wiring on rear fender (10" off License light 'white', 3" off right turn 'orange', and 5" off left turn 'blue').

Plug-in: White License light connector and connect ends to supplied License light (Green to black, black to white) using supplied Butt connectors. *FIG (D & E)

Re-install:Battery

Disassemble: Upper Heat shield from stock fender and install at center of Tail section with stock Allen bolt *FIG (C).

Install: Side panels and Signal brackets. (*NOTE* Forward mounting points go behind subframe) secure with supplied 6x16mm Hex bolts, and stock Phillip screws. Make sure to tuck Side panels into Upper Heat shield. *FIG(C)

Adhere: Turn signals to Turn signal brackets. Route wires as shown and connect (Right - orange, Left - blue) *FIG (D).

Check: All Lighting for proper function.

CAREFUL





Replace: Tail section (Plug in Taillight). Watch edges of signal bracket (*NOTE* Signal brackets will be approx. 1/16" below bodywork) Secure with stock hardware.

Replace: Seats

PARTS LIST

1 - Main pan		4 - 6x16mm Hex bolts
1 - License light	2 - Turn signal brackets	6 - 6mm nuts
1- Pair of turn signals	1 - Backing plate	4 - Washers
2- Side panels	6 - 6x10 Allen bolts	6 - Connectors

1H1002LTD

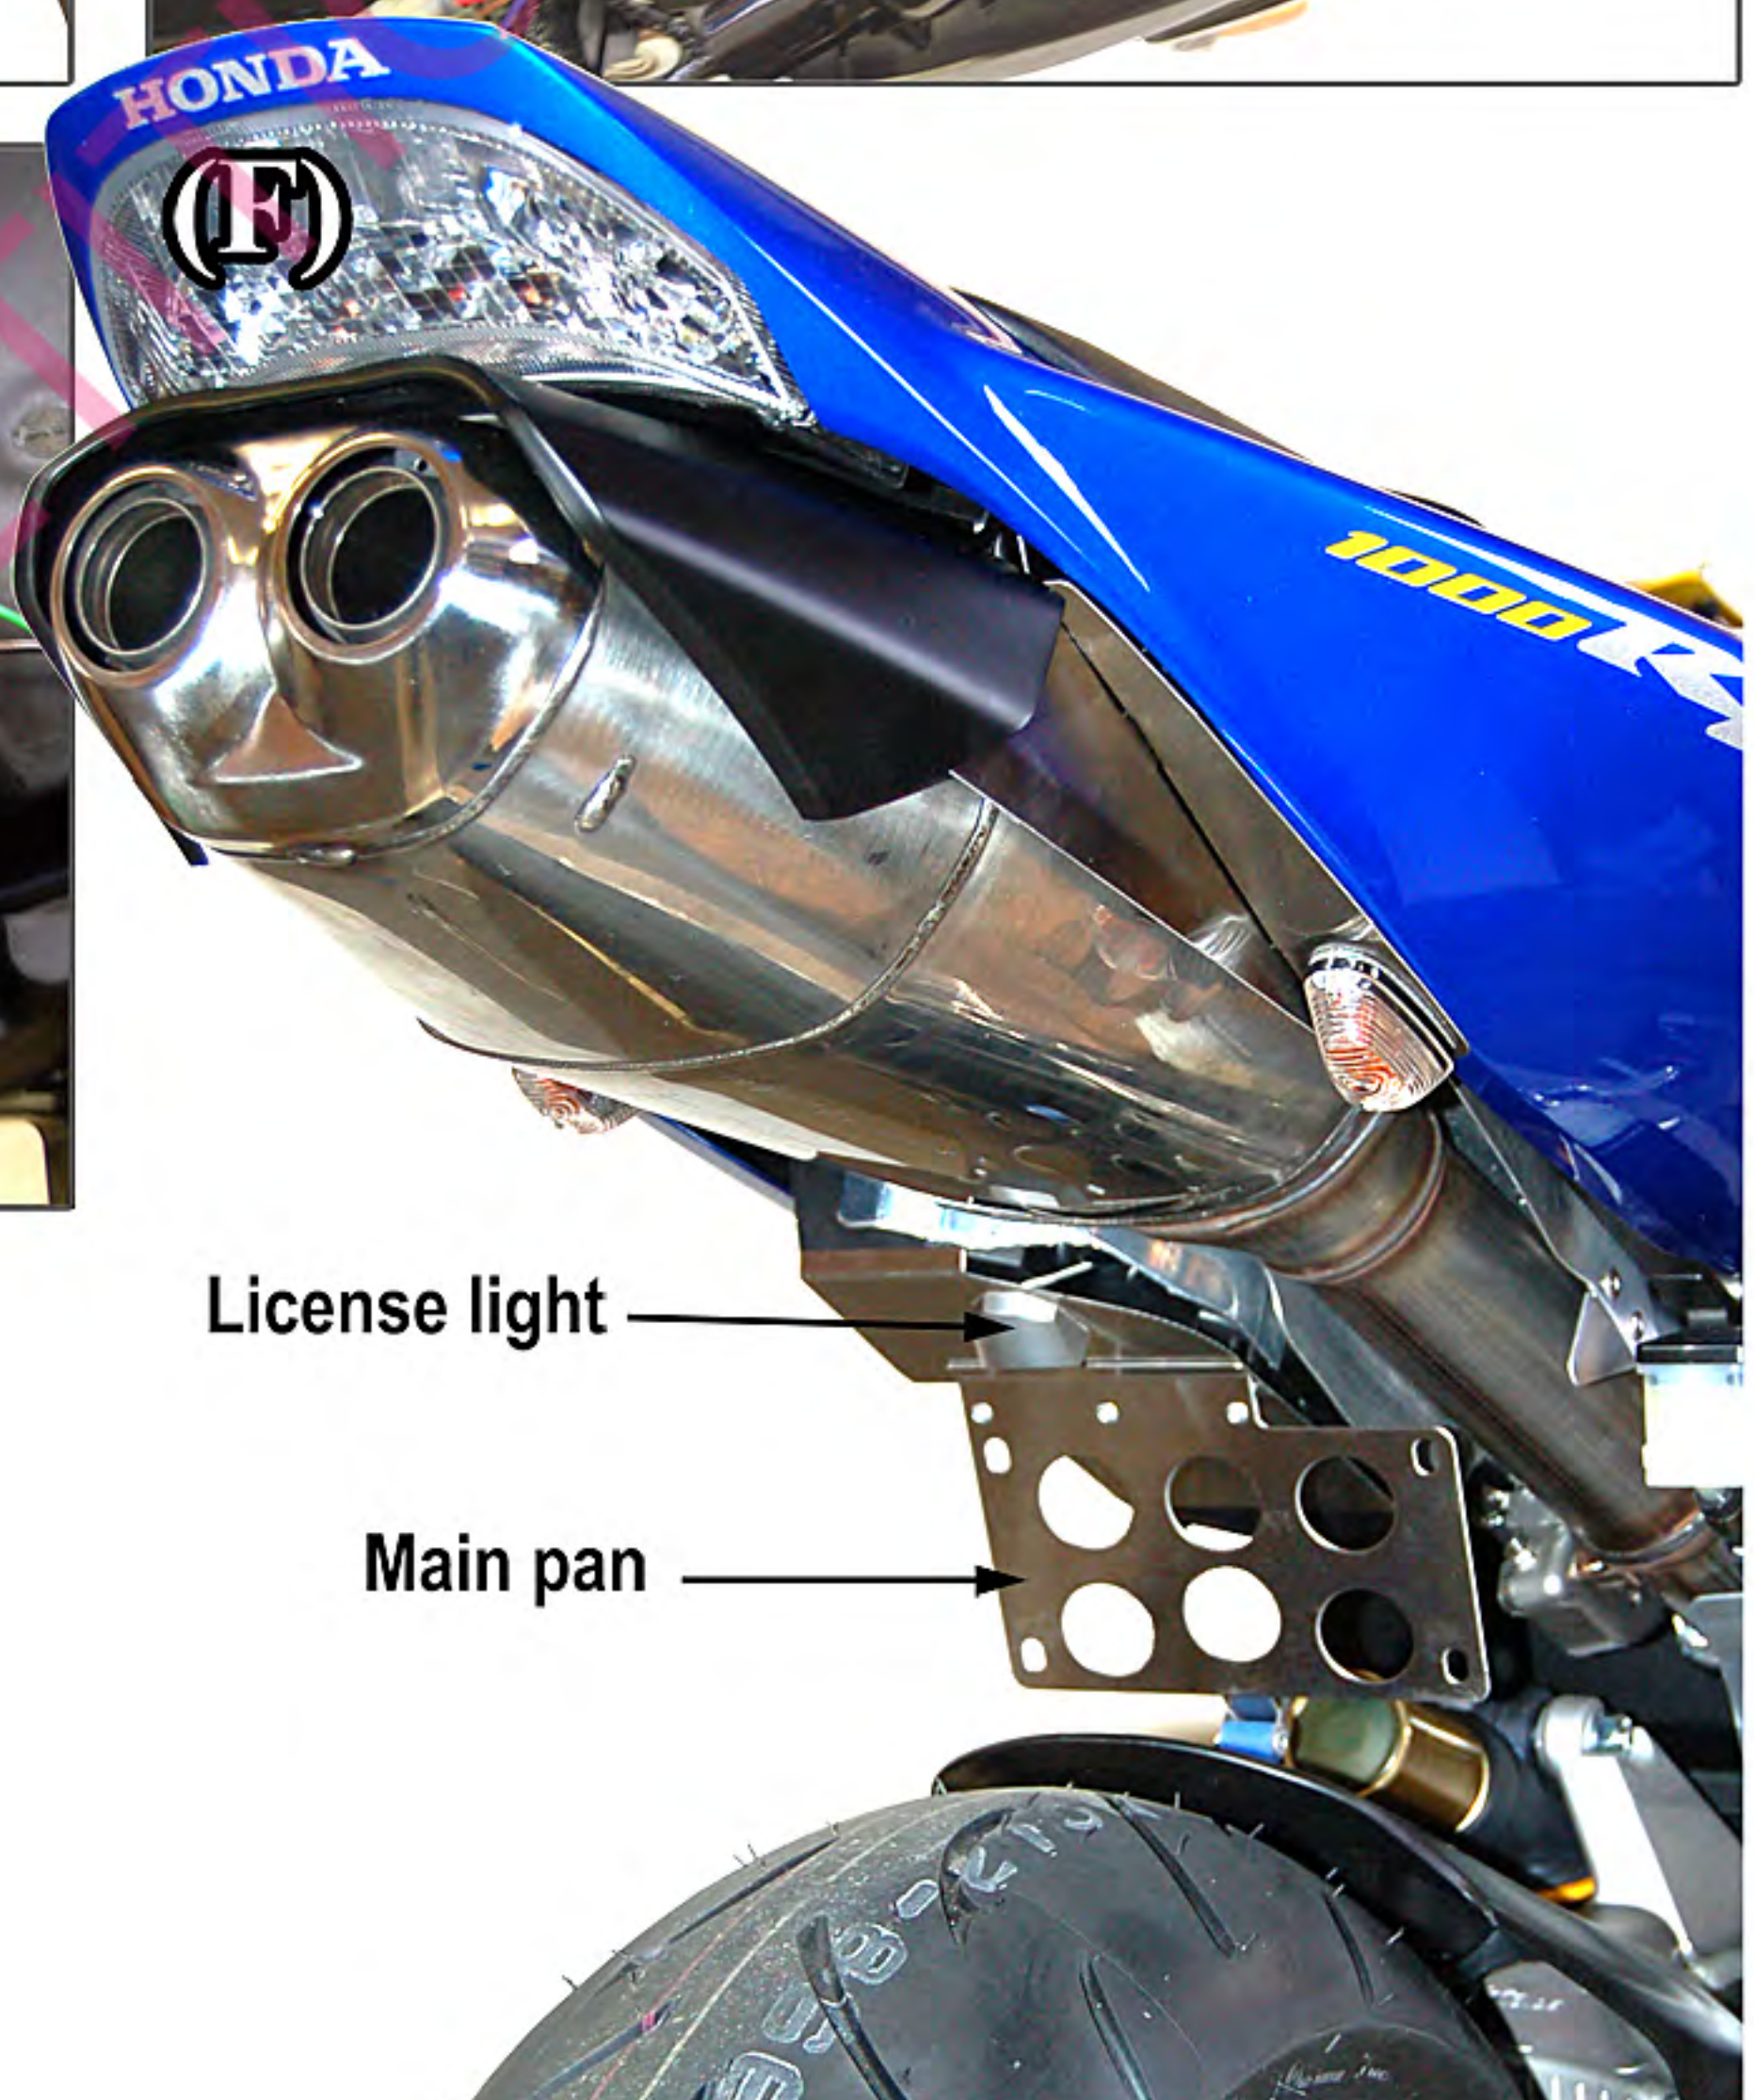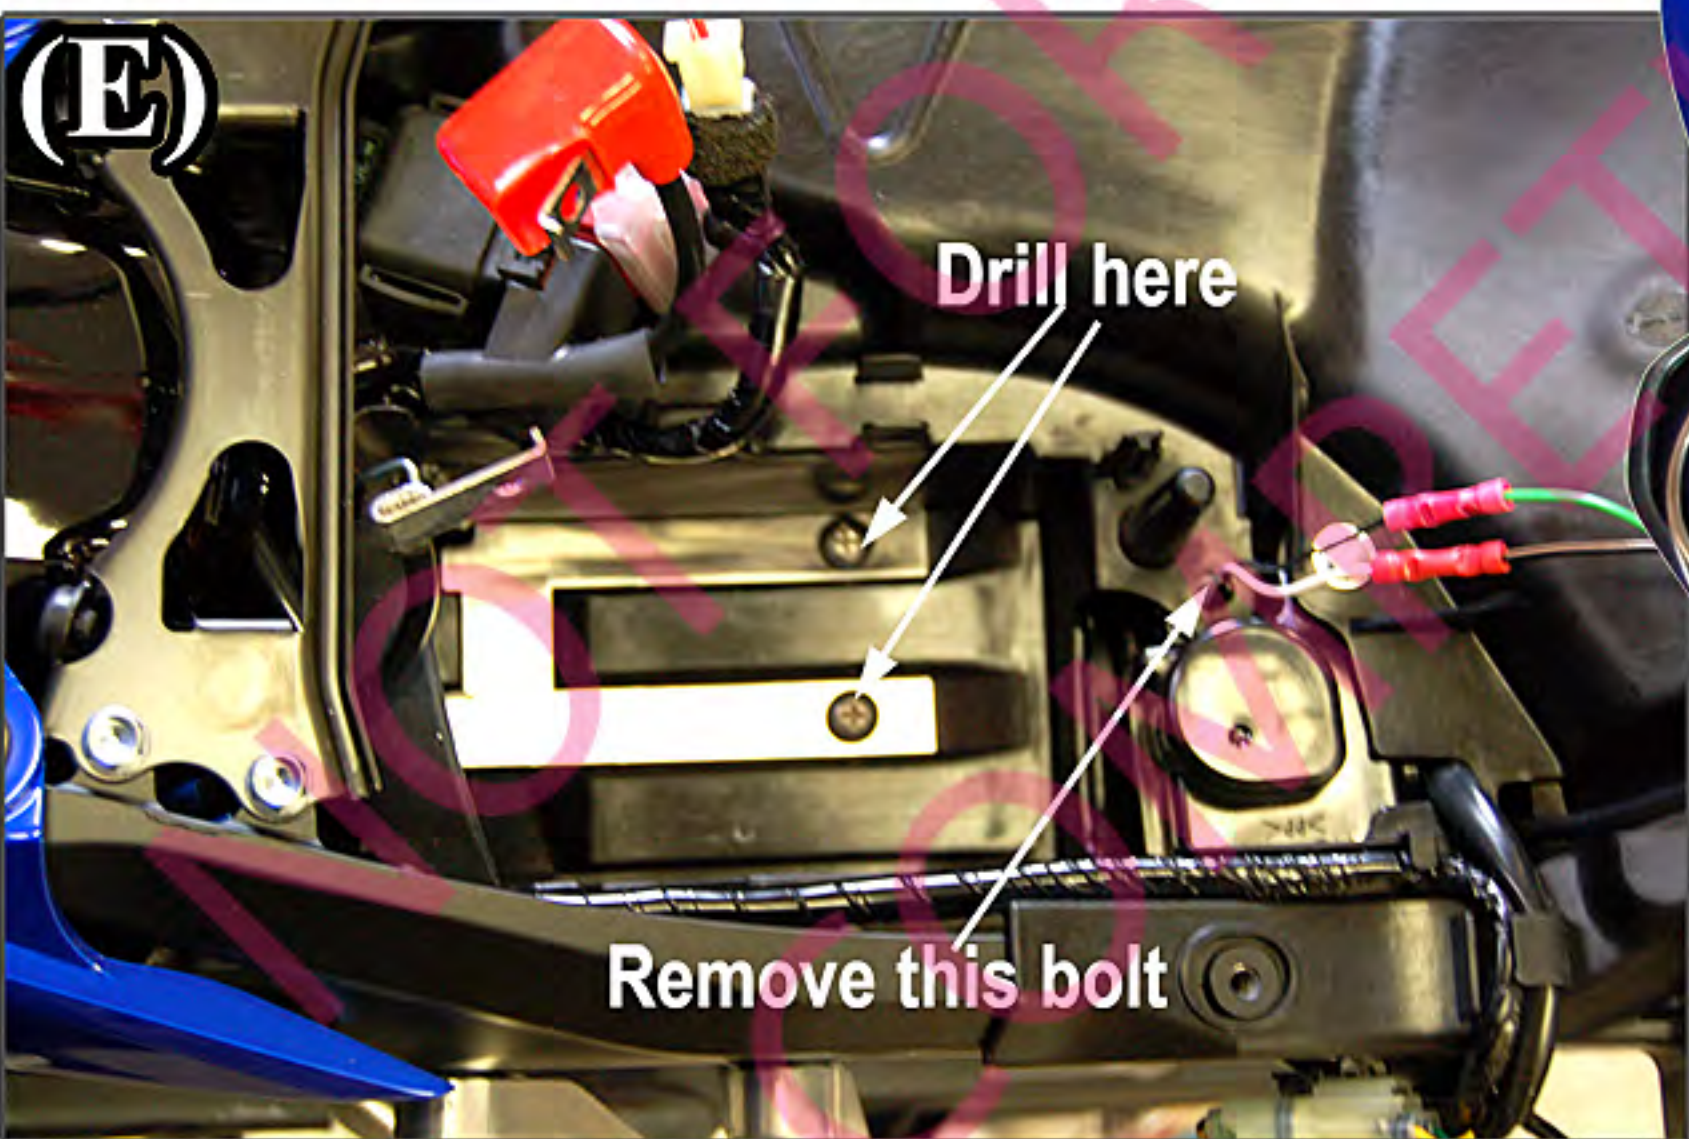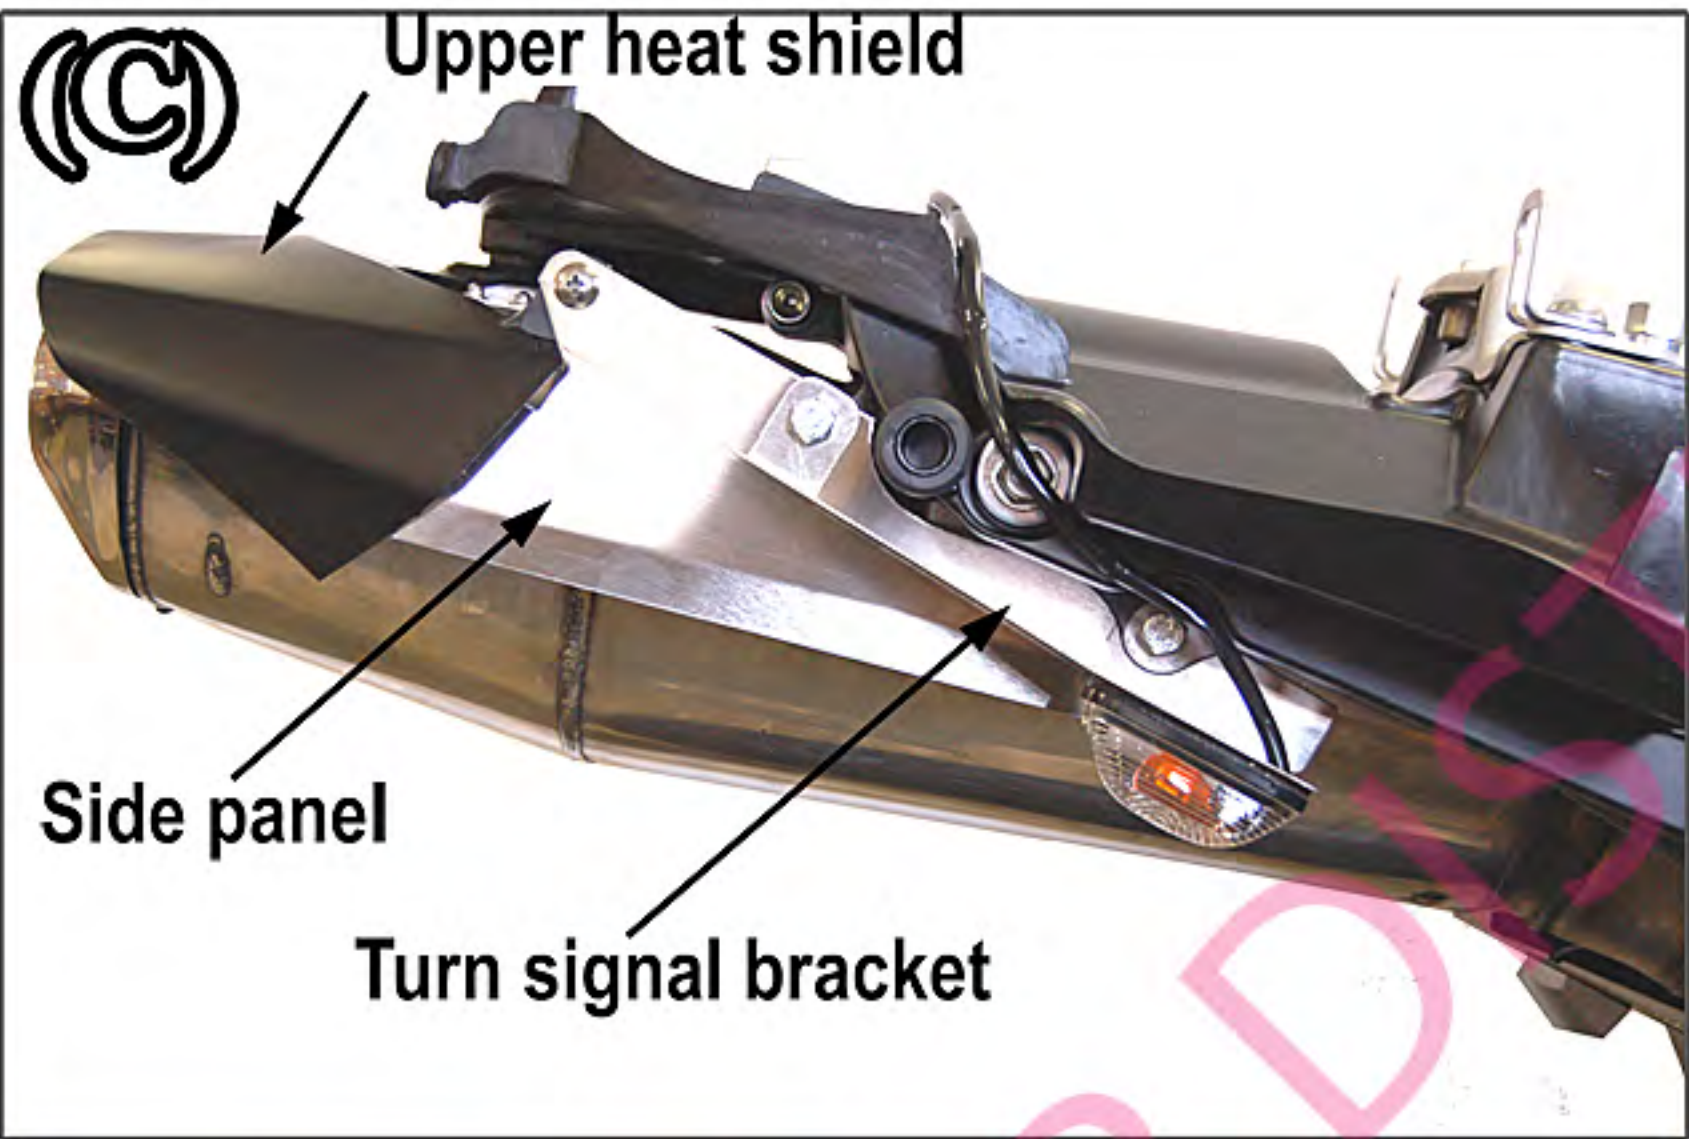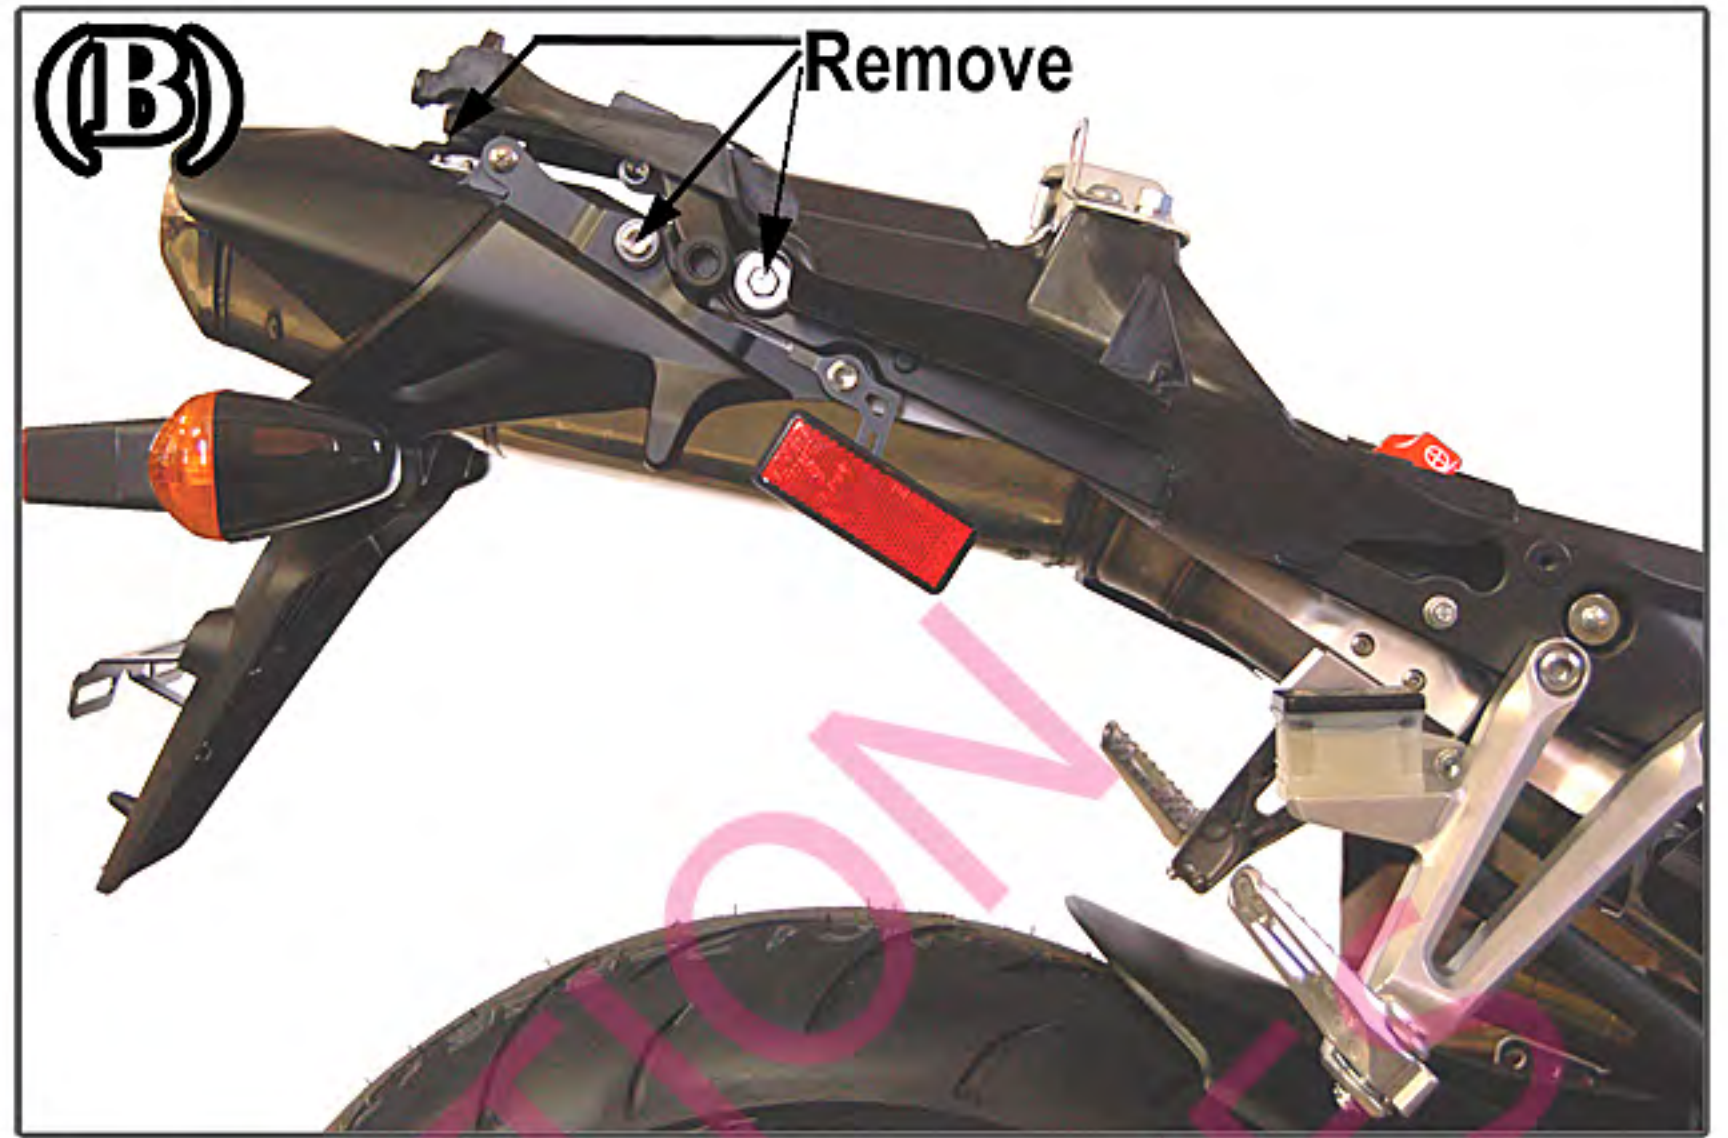

06 HONDA CBR1000RR LTD Fender Eliminator