


# COMPETITION WERKES

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

**(800)736-2114**

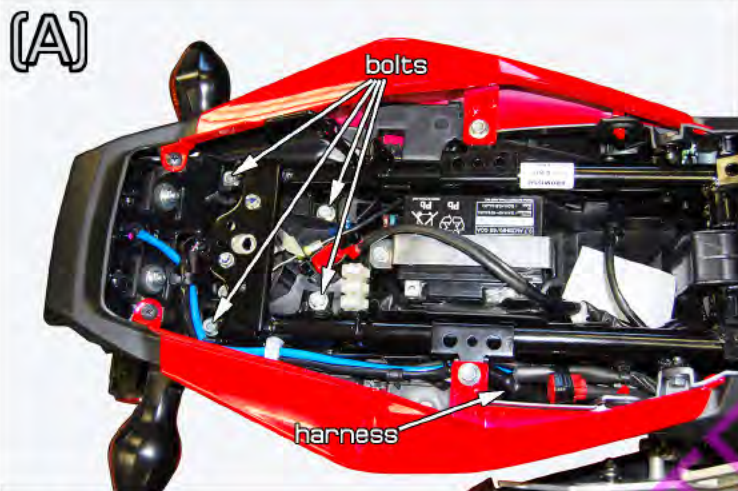


### REMOVAL:

- 1) Remove seat (use key).
- 2) Remove rear fender [4- bolts] \*FIG (A) and unplug wiring harness.
- 3) Cut wire harness from rear fender (about 12 inches from the connector).

### INSTALL:

- 1) Secure your license plate with 4- 6x10 Allen Bolts (washers and nuts behind).
- 2) Mount Turn Signals to Main Assembly. \*FIG (B)
- 3) Adhere License Light to Main Assembly. \*FIG (B)
- 4) Connect wires from supplied lighting to stock wire harness. \*\*follow diagram below\*\* \*FIG (B)
- 5) Position Main Assembly to bike, plug in harness, and secure with 4- 8x16 Allen Bolts (washers and nuts on top).\*FIG (C)
- 6) Check lighting for proper function.
- 7) Replace seat.

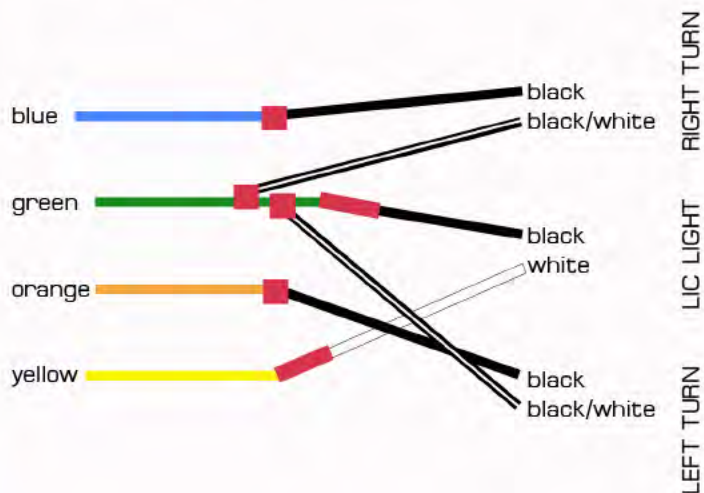

### PARTS LIST:

- |                          |                  |
|--------------------------|------------------|
| 1- Main Assembly         | 1- License Light |
| 1- Pair Signals (S-1123) | 1- 8" Zip-tie    |
| 2- Butt Connectors       |                  |
| 4- 8x16 Allen Bolts      | 4- 8mm Washers   |
| 4- 8mm Nuts              |                  |
| 4- 6x10 Allen Bolts      | 4- 6mm Washers   |
| 4- 6mm Nuts              |                  |

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.