


# COMPETITION WERKES

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

(800)736-2114


(A)

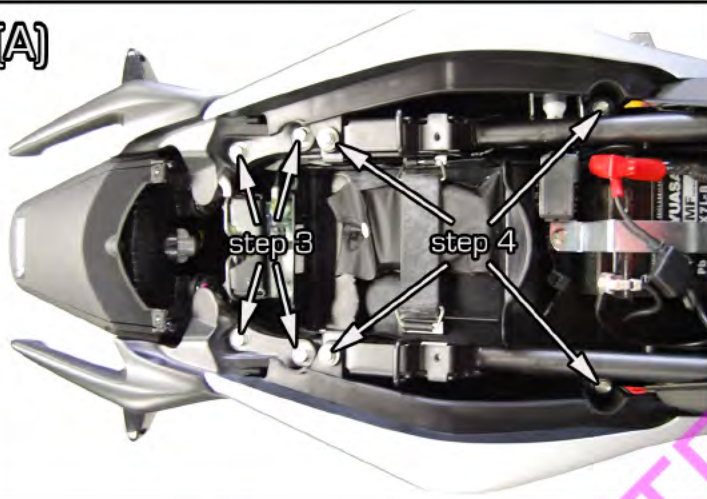

(B)



(C)

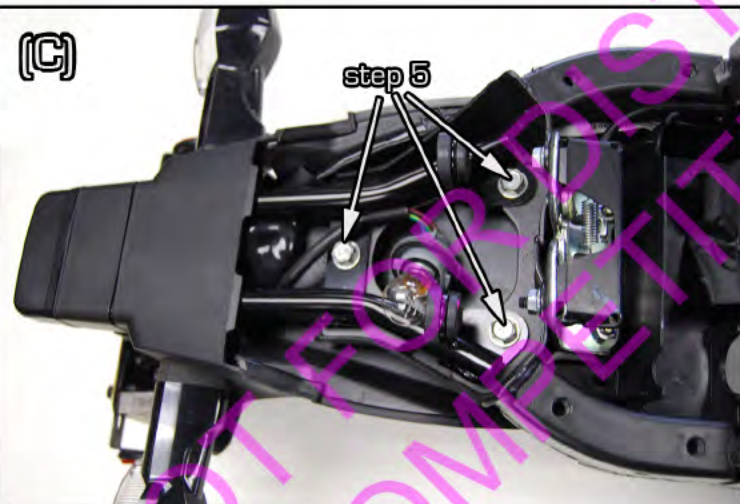


(D)



(E)



(F)

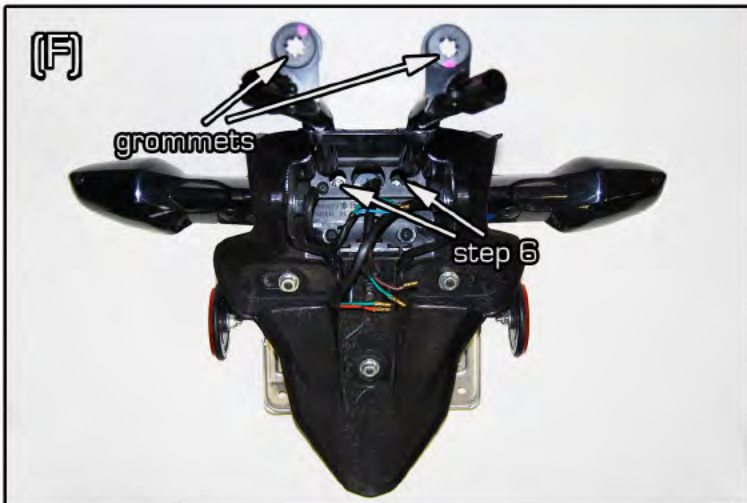

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1H250

# COMPETITION WERKES


## PARTS LIST:

- 1- Main Assembly   2- Taillight Mounting Brackets   2- Signal Brackets   1- Pair Short Stalk (S-1110-C)  
1- 8x12 Allen Bolt   2- 8x25 Allen Bolts   2- 8mm Washers   2- 8mm Nuts  
2- 6x10 Allen Bolts   2- 6x12 Allen Bolts   4- Washers   4- 6mm Nuts



## REMOVAL:

- 1) Remove rear seat (use key)
- 2) Remove front seat (2- allen bolts).
- 3) Remove grab bars (2- bolts per side) \*FIG (A)
- 4) Remove tail assembly (4- bolts \*FIG (A), 2- plastic rivets \*FIG (B), release seat latch cable and taillight bulb socket)
- 5) Remove rear fender assembly (3- bolts \*FIG (C), unplug signals and license light wires).
- 6) Remove license light (2- nuts) \*FIG (F)
- 7) Scribe a line across undertray as shown in \*FIG (D).
- 8) Remove undertray (2-plastic rivets) \*FIG (B)
- 9) Cut undertray (follow scribe across). Study \*FIG (E).

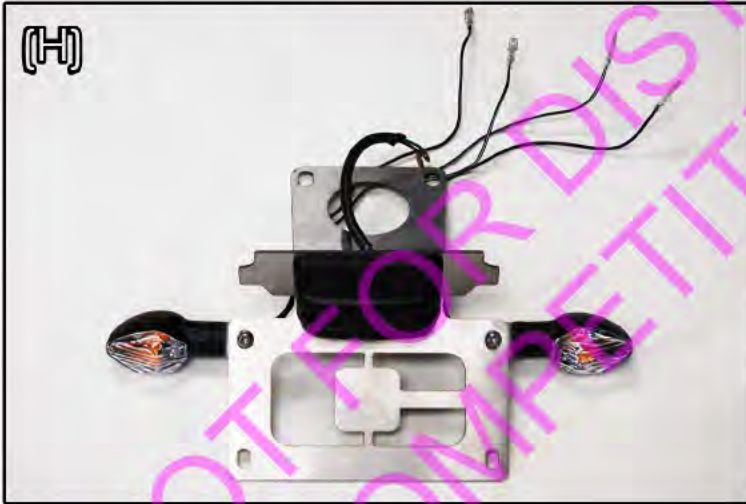

## INSTALLATION:

- 1) Drill 3/8" hole in undertray. (1.5" from cut) \*FIG (E)
- 2) Replace tail assembly (connect seat latch cable, secure with stock bolts and plastic rivets, replace bulb socket).
- 3) Take grommets from rear fender assembly. \*FIG (F)
- 4) Insert grommets into Tail Light Mounting Brackets.
- 5) Position Taillight Mounting Brackets as shown \*FIG (G).
- 6) Secure license light to Main Assembly (2- nuts) \*FIG (H).
- 7) Secure your license plate (2- 6x10 bolts lower holes).
- 8) Mount Signal Brackets (2- 6x12 bolts upper holes).
- 9) Install Short Stalk Signals to Signal Brackets. \*FIG (H)
- 10) Secure Main Assembly to bike (1- 8x12 bolt in rear hole, 2- 8x25 bolts in forward holes).
- 11) Secure Taillight Mounting Brackets (2- 8mm nuts).
- 12) Route turn signal wires through hole drilled in undertray. Reposition undertray to underside of tail and secure with 2- plastic rivets.
- 13) Cut protective sleeve from wiring harness.
- 14) Connect turn signals using supplied connectors.
- 15) Plug in license light.
- 16) Check lighting for proper function.
- 17) Replace grab bars (stock hardware).
- 18) Replace seats.



## HONDA WIRE COLORS:

Green= Ground      Brown= License/Tail  
Orange= Right      Blue= Left

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1H250