
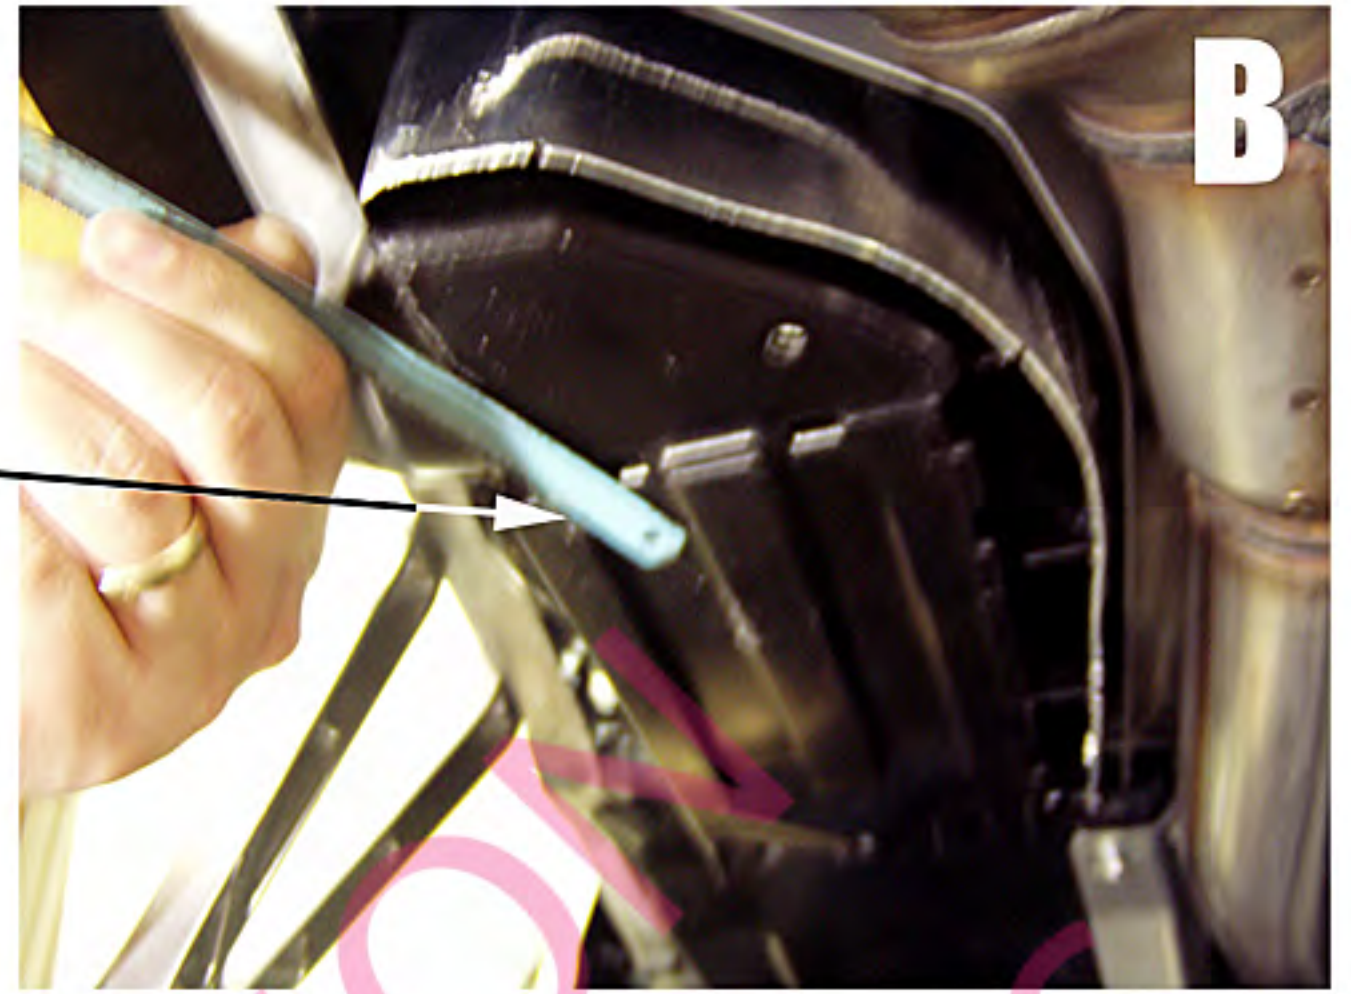


05 HONDA CBR600RR

***CAUTION: STAINLESS STEEL EDGES MAY BE SHARP!!**


- REMOVE:** Rear seat, front seat (2 allen bolts under corners), tail section (2 plastic rivets top front *Push center down then pull outside up, 4 allen bolts on top, 2 plastic rivets on bottom near rear footpegs) Pull entire tail section back about 4" then unplug tail light. Set tail section aside. Rear fender can now be removed (4 bolts shown as mounting points in *FIG E) *NOTE: Keep the 2 shorter bolts for later.
- DISCONNECT:** Battery and remove (push strap end down and off).
- REMOVE:** Rubber wiring harness from tabs and relocate out of the way.
*FIG A.
- POSITION:** Backing plate to bottom of black box *FIG A.
- MEASURE:** 2" from back of box and mark the center of the bottom middle rib.
*FIG C.
- DRILL:** ¼" holes as shown in *FIG'S A & C.
- ESTIMATE:** Locations for 3 wiring holes *FIG'S D & F (These are not critical just get close) drill ¼" holes at these 3 locations.
- CUT:** Corner off left rib *FIG B (Just about ¼").
- MOUNT:** Main/license bracket *FIG G (use 6x10 allen bolts up through in back, and down through in front, with washer and nut).
- SECURE:** License light to main/license pan and route wires as shown in *FIG F.
- MOUNT:** Signal mount as shown in *FIG E (use 6x12 hex bolts supplied in rear hole). Leave front of mount down as shown.
- SECURE:** Turn signals to signal mounts and route wires as shown in *FIG D.
- POSITION:** Front of signal mount up, between heat shield and back side of sub-frame (use shorter bolts saved from rear fender).
- CUT:** Ends off of stock wiring on rear fender (you will need 8" of blue, 3" of orange, 2" of white). Pay attention to color destination.
- CONNECT:** Wiring with butt connectors supplied and position wires as shown in *FIG D & F.
- INSERT:** Battery and wiring harness, connect cables and secure with strap.
- CHECK:** Lighting
- INSTALL:** Tail section (connect tail light as you slide tail into position).
Front and rear seats.

Parts List: 1 – Main/License bracket, 1 – backing plate, 2 – signal mounts, 1 – pair of signals, 6 – butt connectors, 6- 6x10 allen bolts, 2 – 6x12 allen bolts, 6 – 6mm nuts, 6 – washers, 1 – license plate light.

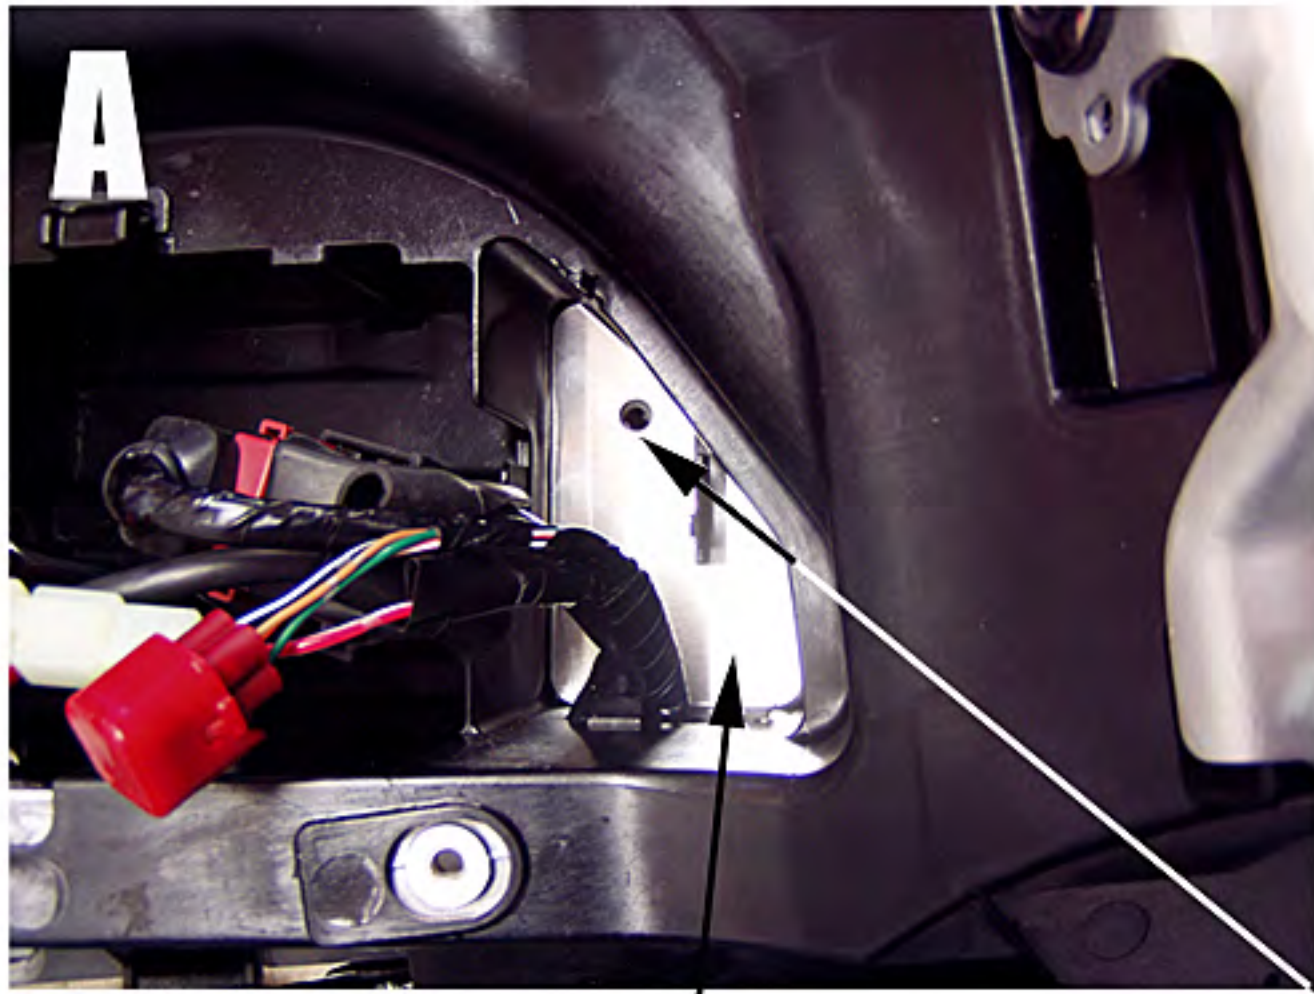

CUT
HERE


BACKING PLATE

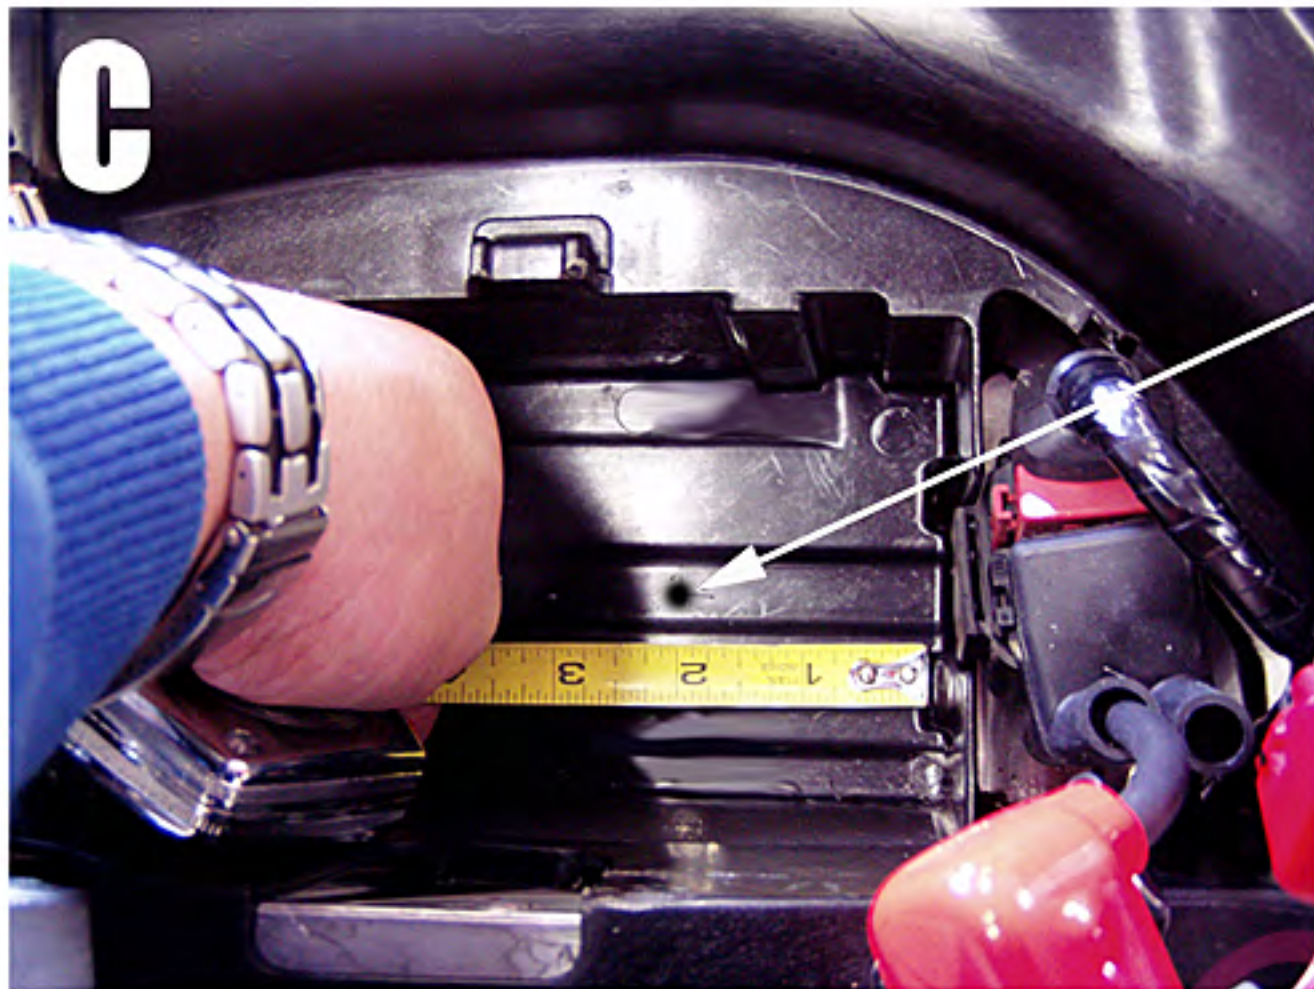

DRILL
HERE




HONDA CBR 600rr

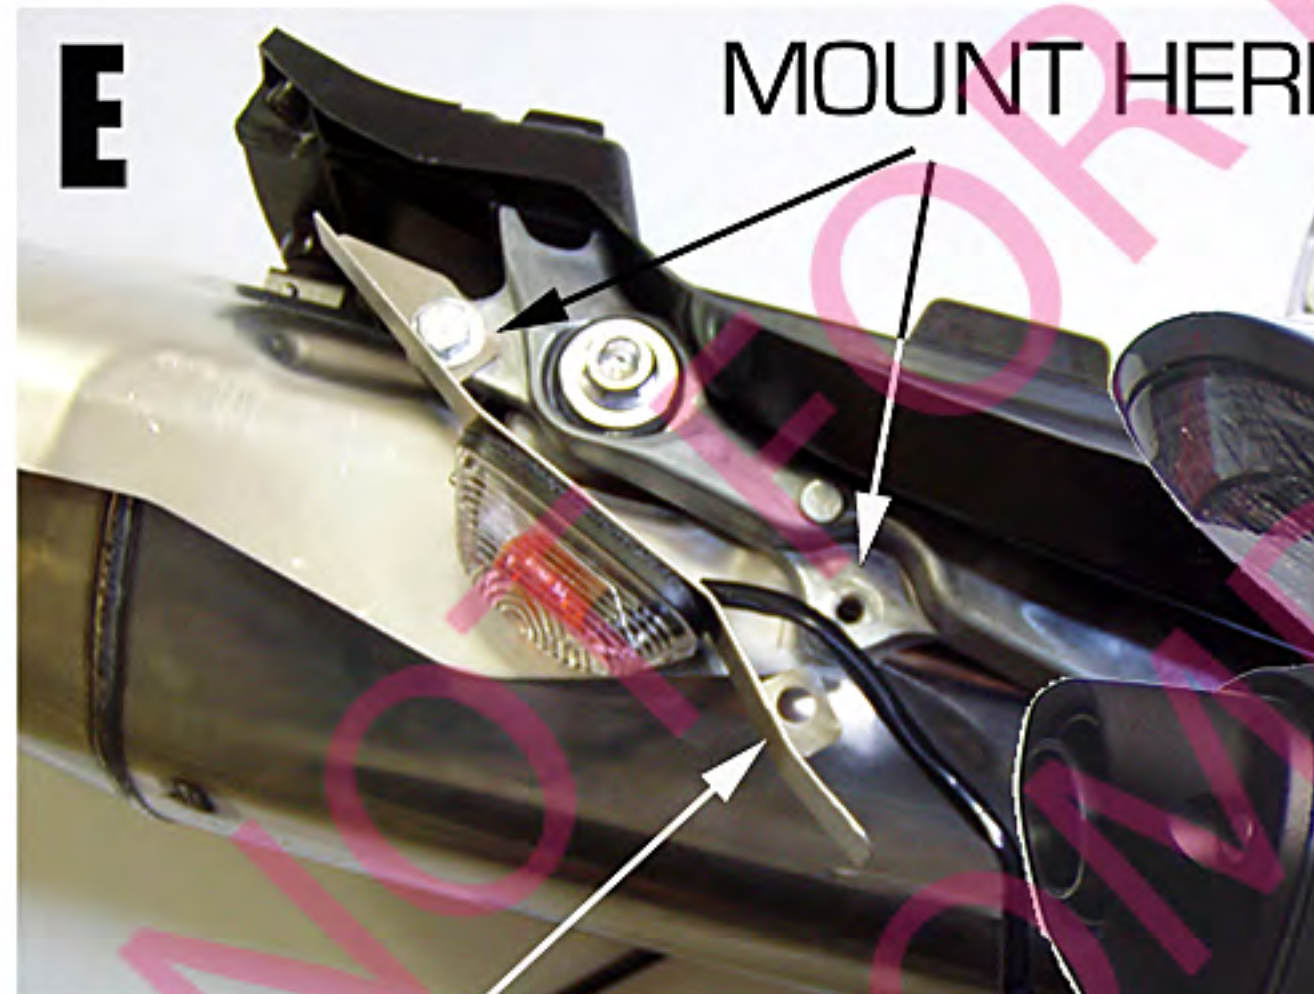

MOUNT HERE

SIGNAL MOUNT

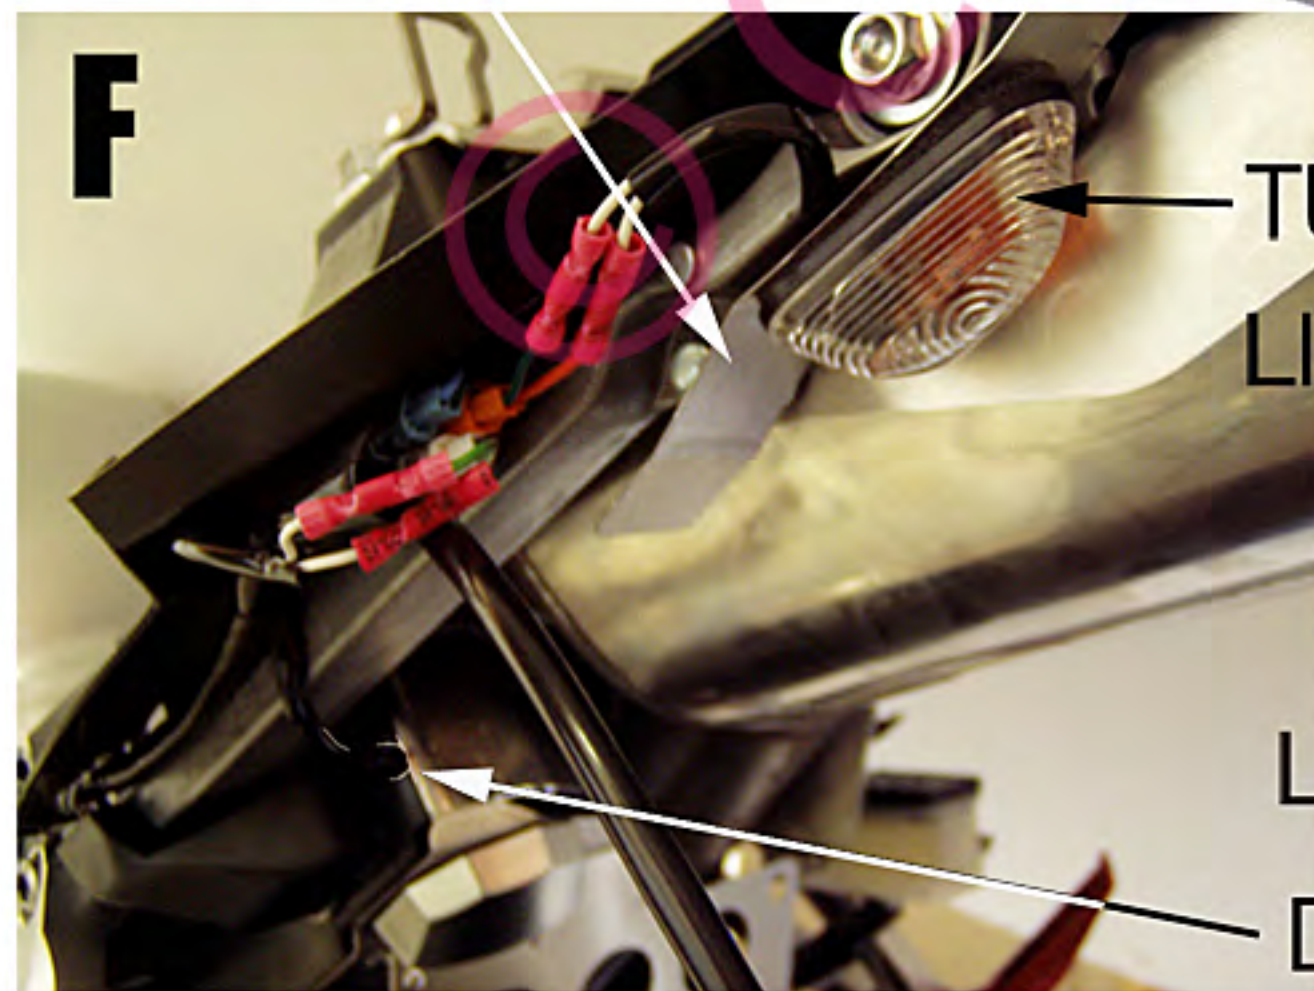

TURN SIGNAL
LICENSE LIGHT

LICENSE BRACKET

DRILL HERE

G