


COMPETITION WERKES

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

(800)736-2114

- REMOVAL:
- 1) Remove rear seat (use key). Remove front seat (2- allen bolts under corners) * FIG (A).
 - 2) Remove tail section (pull out on side panels below front seat, remove 4- allen bolts * FIG (A), spread tail section outward, and pull off towards the rear).
 - 3) Unplug turn signals and license light. * FIG (C) * NOTE* white, blue and orange connectors.
 - 4) Remove rear fender (4- bolts) * FIG (B) Slide toward rear to release clips to heat shield.
 - 5) Remove lower part of rear fender (1- nut to reflector 2- allen bolts on sides) * FIG's (D & E)
 - 6) Cut wires to turn signals about 1" from signal base * FIG (F). Remove factory signals.
 - 7) Remove license light (2- nuts) * FIG (F). Separate light from spacer (2- phillips screws, 2- nuts) * FIG's (G & H).

- INSTALL:
- 1) Install Short Stalk Signals (insert signal through signal plate, plastic fender, and back with another signal plate). Connect wires to wire ends previously cut. * NOTE* see back of signal package.
 - 2) Slide License Pan into position secure with stock allen bolts and supplied washers and nuts.
 - 3) Install license light using stock hardware.
 - 4) Route wires into stock locat on on fender. * NOTE* use zip-tie to secure sigal wires into unit.
 - 5) Mount rear fender back to subframe using stock hardware. Plug wires in. Check lighting.
 - 6) Replace tail section and seats using stock hardware.
 - 7) Mount your license plate using 4- 6x10 Allen bolts backed with washers and nuts.

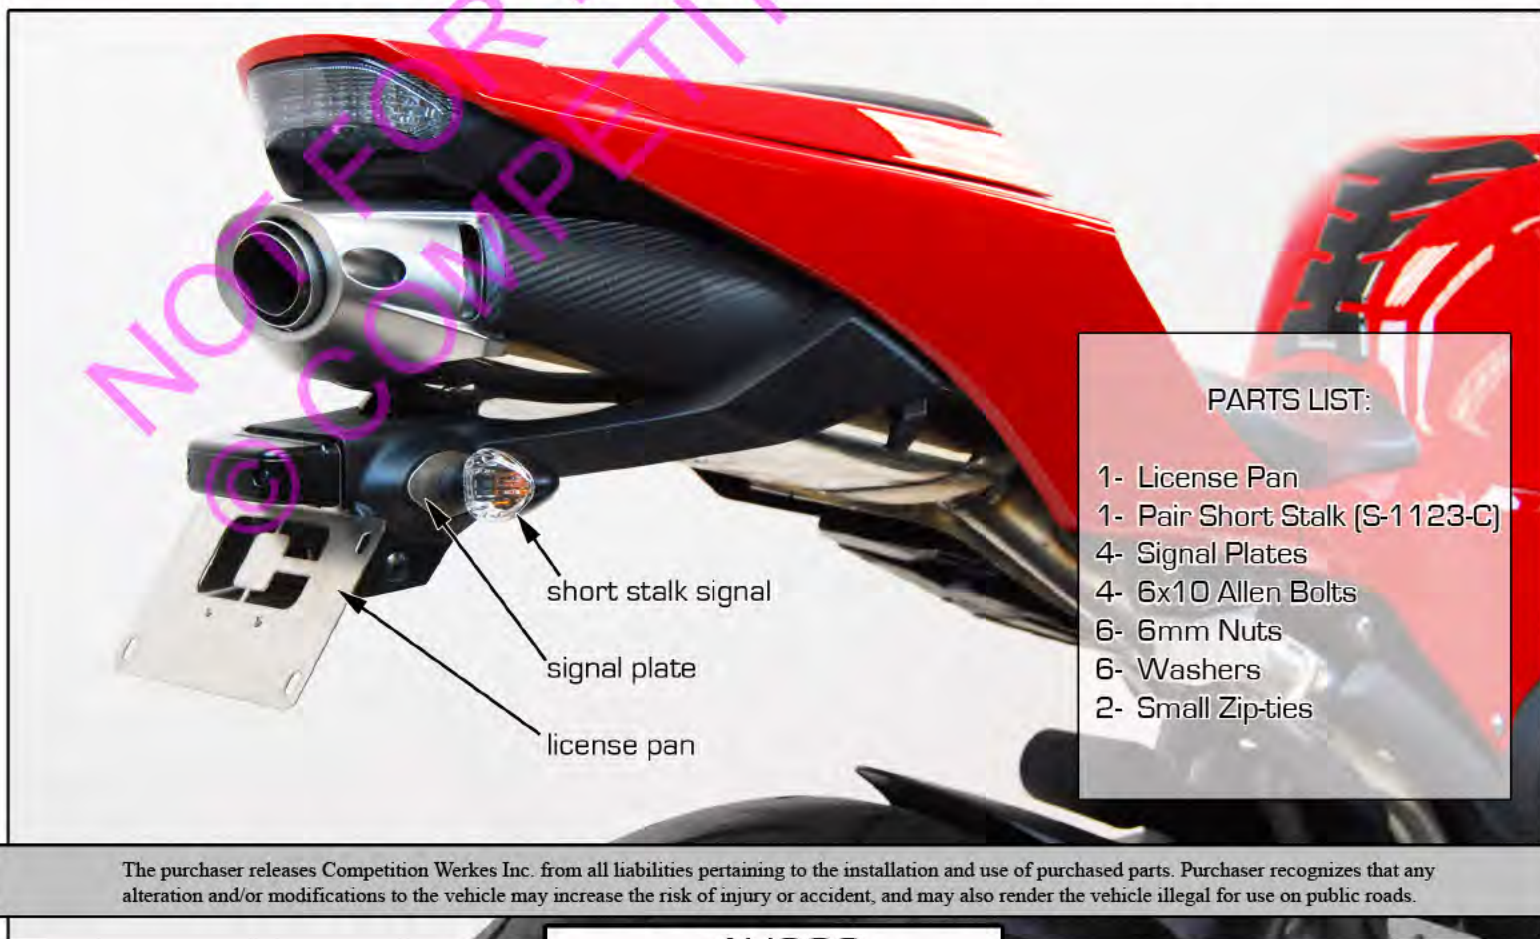

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1H608

