



# COMPETITION WERKES

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

(800)736-2114

## Kawasaki Ninja 300 Fender Eliminator

- REMOVE: Rear seat and open inner storage compartment.
- REMOVE: Rear fender (4- allen bolts and cut 3- wires). \*FIG (A)
- ADHERE: License Light to Main/License Pan. Position wires in slot. \*FIG (B)
- INSERT: Zip-tie into two slots in Main/License Pan from backside and make about a 1.5" loop (leaving loose) \*FIG (B)
- MOUNT: Main/License Pan to undertail using supplied 6x16 Allen Bolts. Make sure to route License Light wires up into storage area. Use supplied Washers and 6mm Nuts to secure.
- MOUNT: License plate using 2- 6x10 Allen Bolts in lower holes.
- MOUNT: Signal Brackets with 6x12 Allen Bolts through upper holes. \*FIG (C)
- MOUNT: Turn Signals to Signals Brackets. Run wires up through Zip-tie and Rubber Grommet into storage area.
- CONNECT: All wiring using supplied connectors.
- CHECK: Lighting for proper function. Once confirmed, tighten Zip-tie.
- REPLACE: Seat.

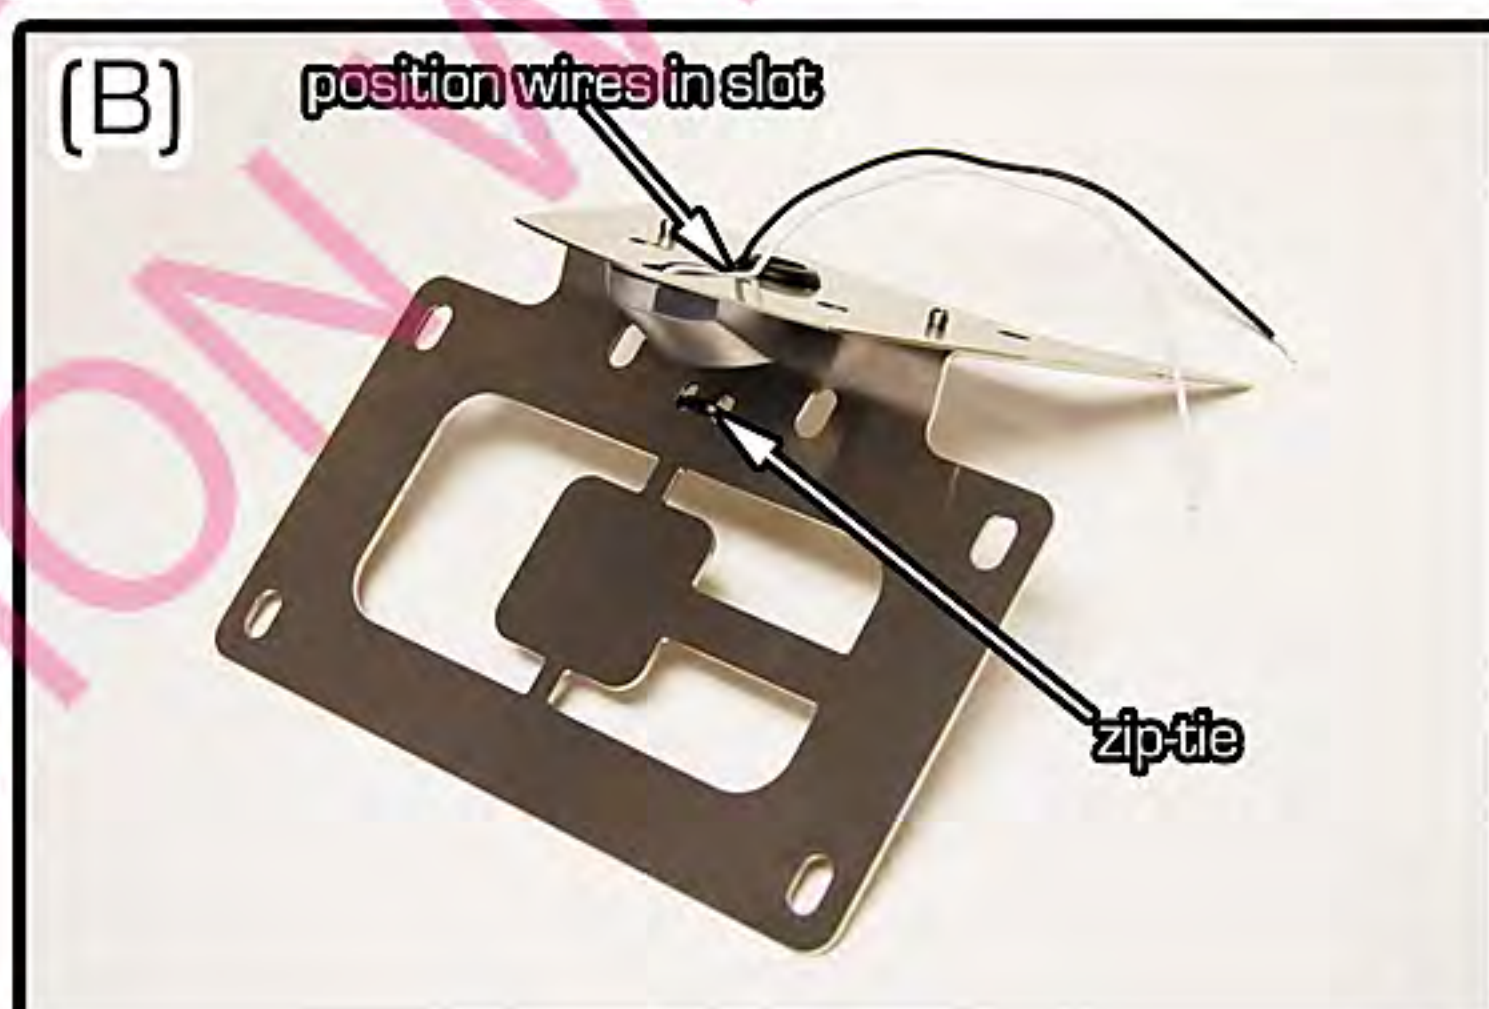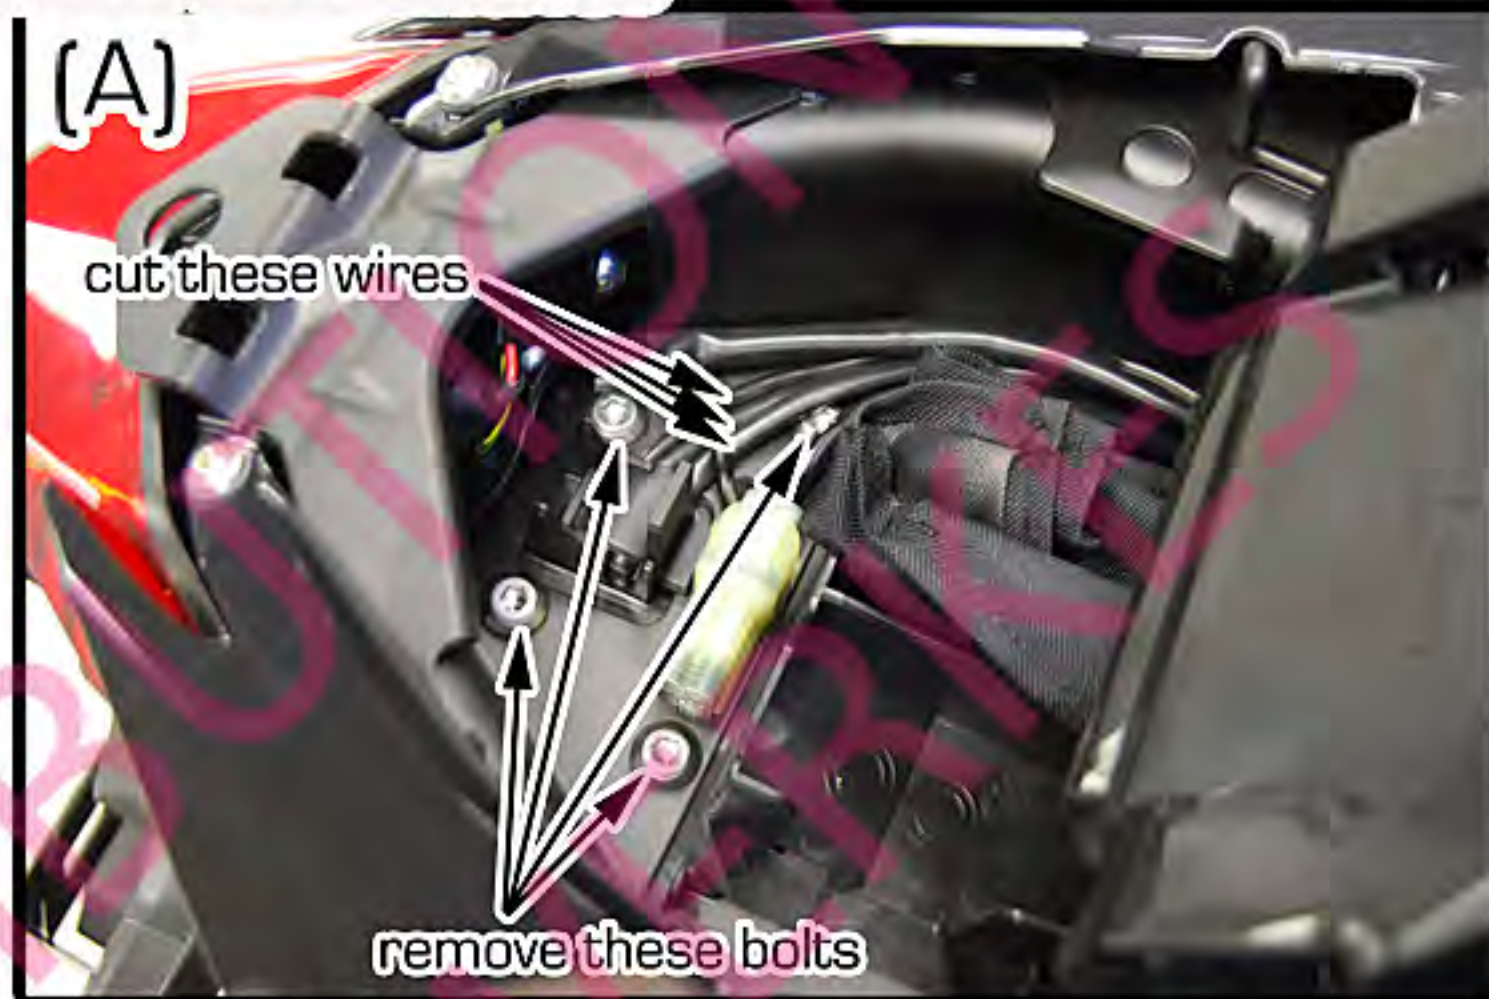

**PARTS LIST:**

- 1- Main/License Pan    2- Signal Brackets    1- Pair (10w) Signals
- 1- License Light    4- 6x16 Allen Bolts    2- 6x12 Allen Bolts    2- 6x10 Allen Bolts
- 8- Washers    8- 6mm Nuts    2- Butt Connectors    1- Small Zip-tie    1-Md. Grommet



The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.