

KAWASAKI




Ninja 650

- REMOVE: Seat. (use key)
- UNPLUG: Turn signals and license light. (loosen from wire retaining clips) *FIG (C)
- REMOVE: Rear fender. (4 bolts in storage area) *FIG (D)
- REMOVE: Backing plate from tail light. (2 bolts, pull plate free from below) *FIG (D)
- ADHERE: License Light to Main Pan.
- DRILL: 1/4" holes at locations shown. *FIG (E)
- MOUNT: Main Pan using supplied 6x30 Allen Bolts (insert up through inner fender and tail light, route wires through rectangular hole) Washers and Nuts on top.
- MOUNT: Cover Plates using supplied 6X10mm Allen Bolts.(2 per side, washers and nuts on top)
- MOUNT: Turn Signals to Signal Brackets. Route wires through previously drilled holes.
- SECURE: License plate to Main Pan and Signal Brackets. (use 6x12 Allen Bolts on top, 6x10 on bottom)
- CUT: Stock connectors off stock lighting. Connect to supplied lighting (use supplied Butt Connectors) and plug in.
- CHECK: Lighting for proper function.
- REPLACE: Seat.

PARTS LIST:

- 1- Main Pan
- 2- Cover Plates
- 2- Signal Brackets
- 1- Pair Short Stalk Signals
- 1- License Light
- 6- Butt Connectors
- 2- 6x30 Allen Bolts
- 6- 6x10 Allen Bolts
- 2- 6x12 Allen Bolts
- 10- 6mm Nuts
- 10- Washers



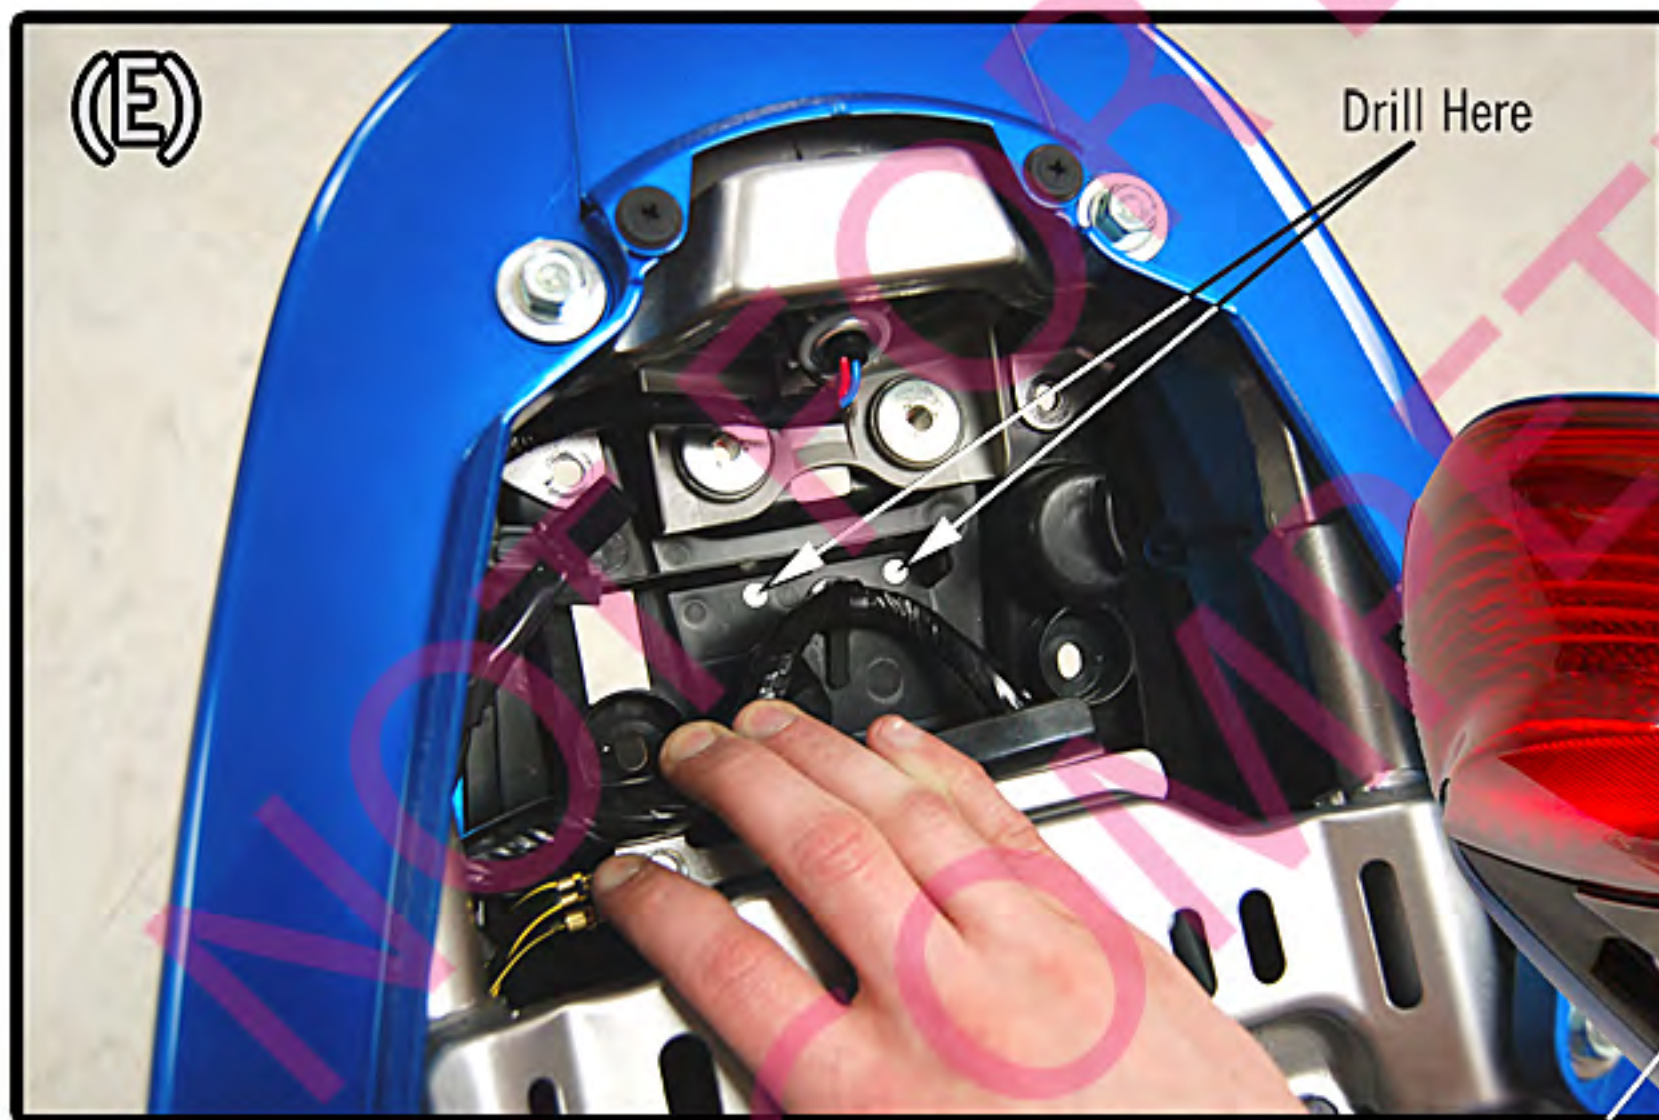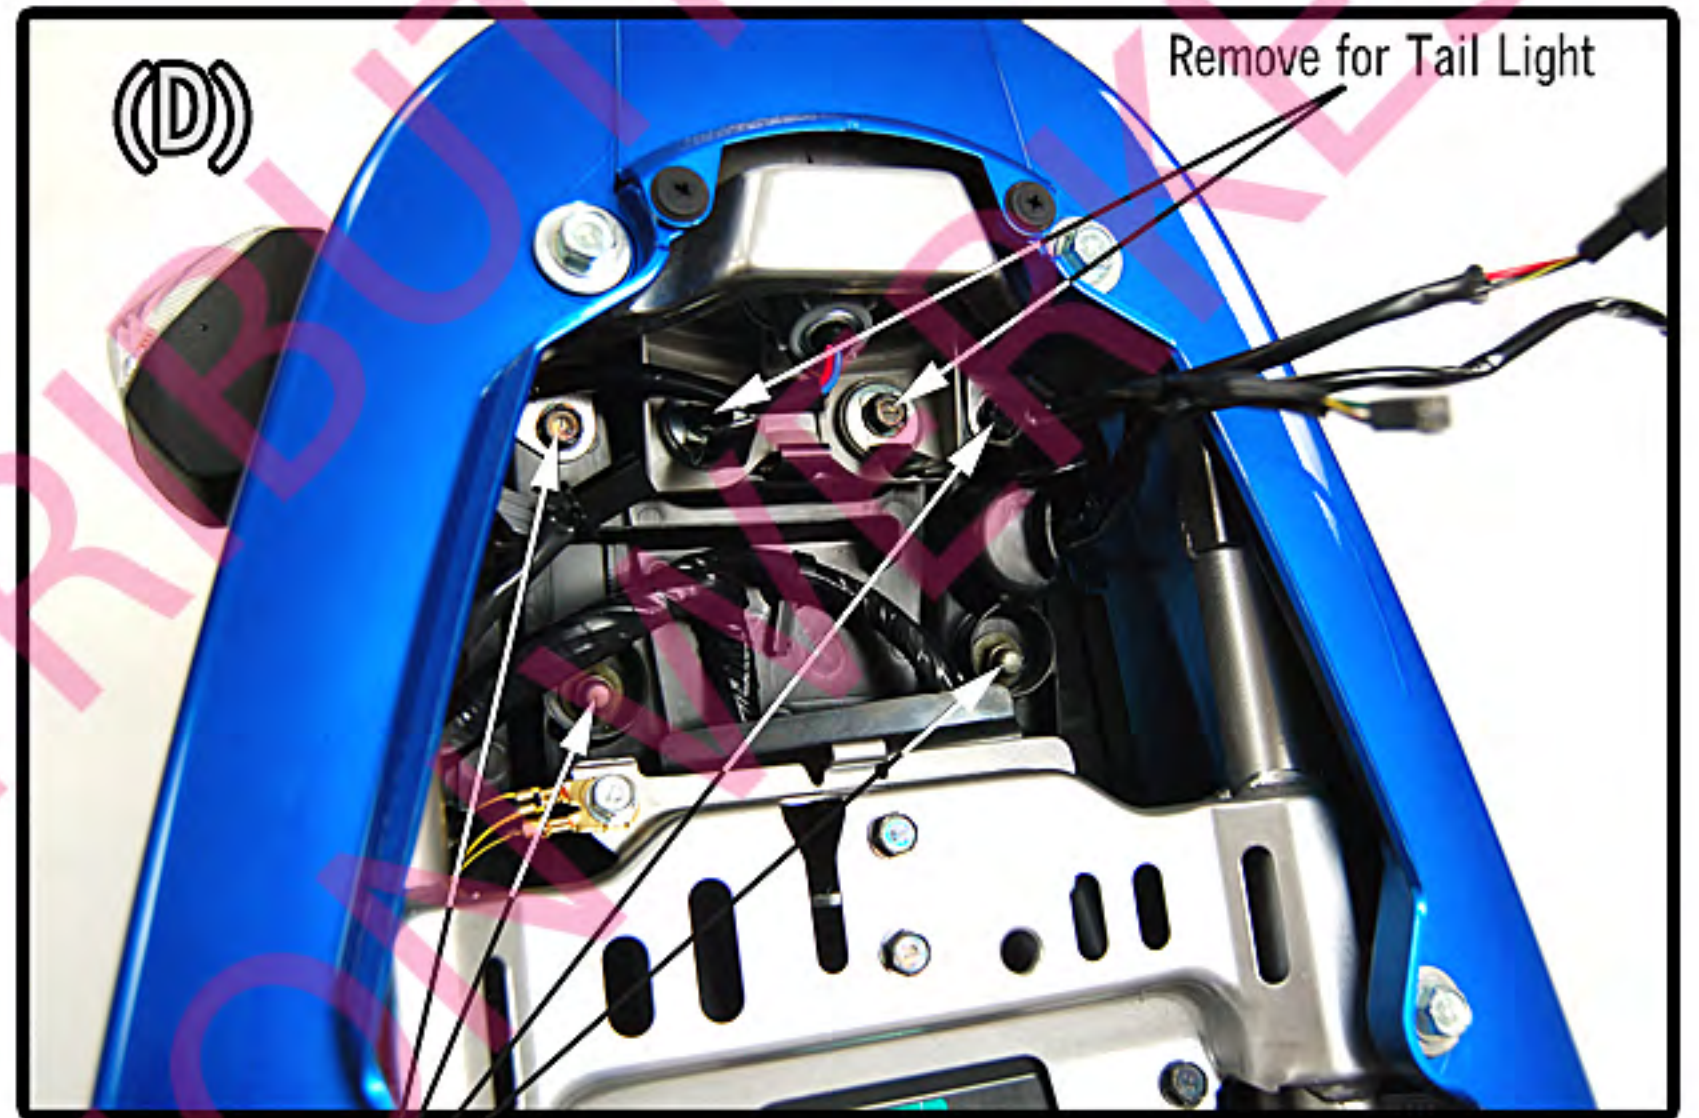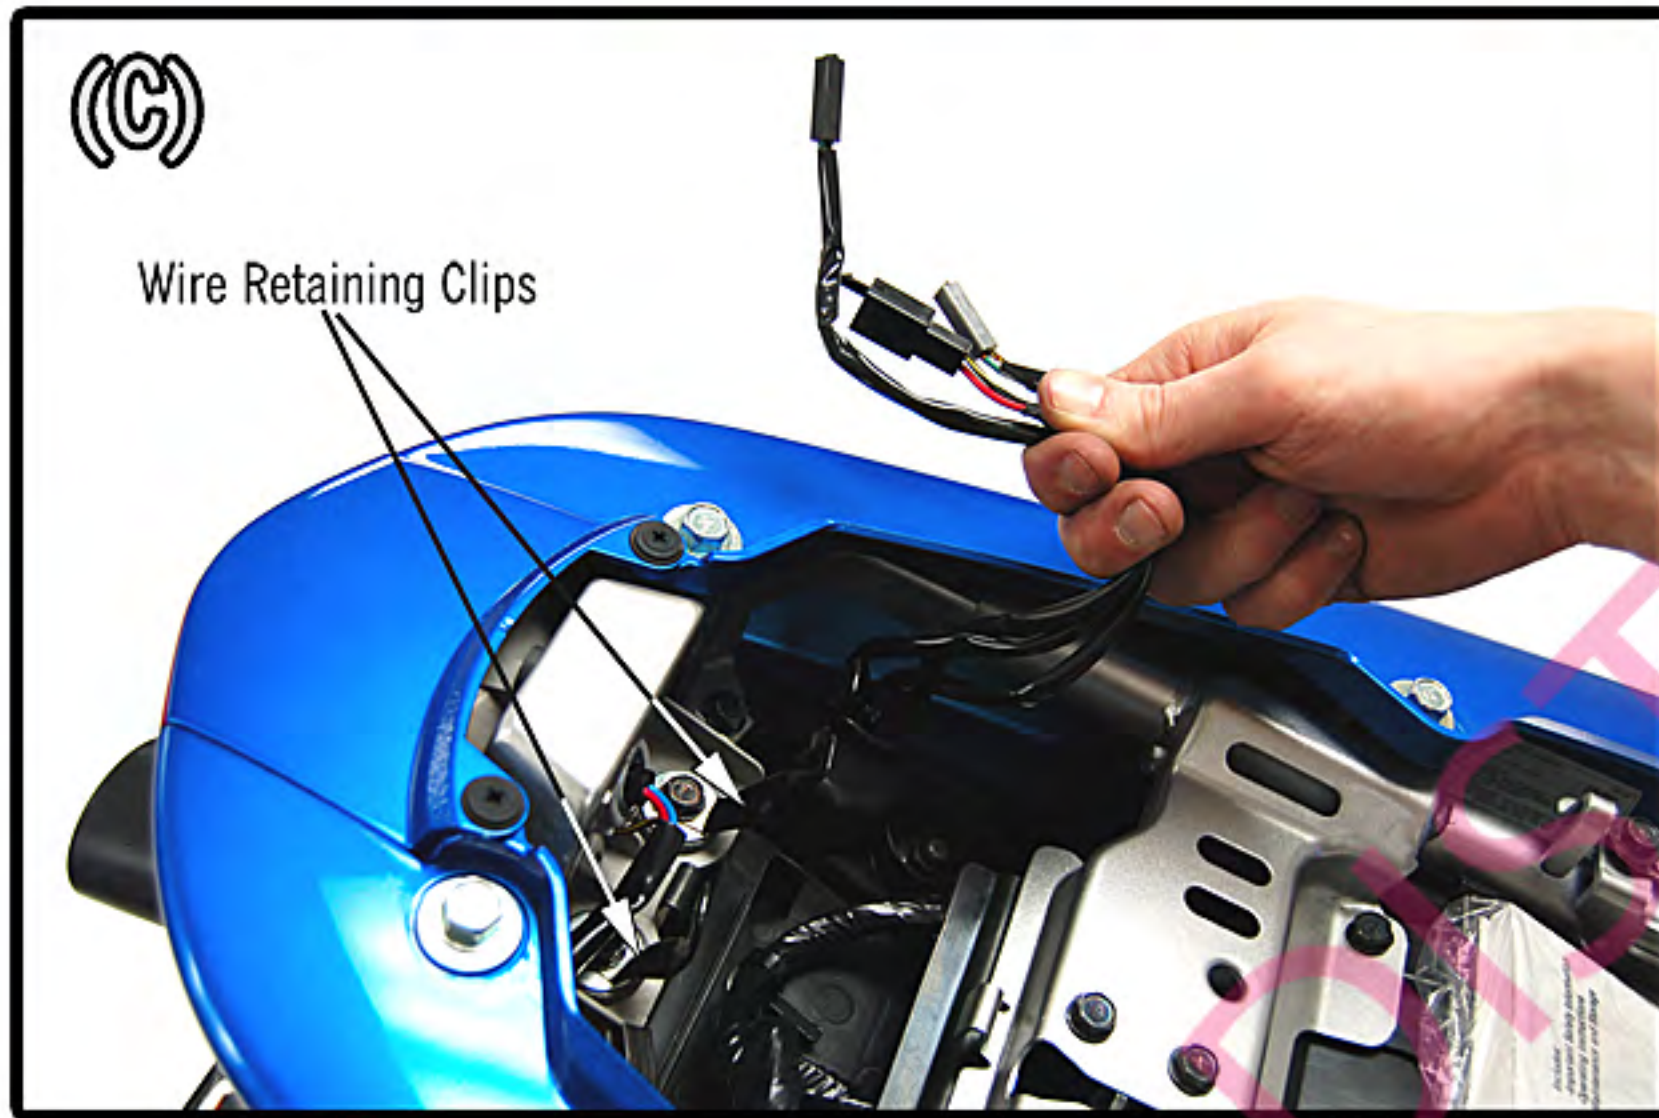

KAWASAKI
Ninja 650