
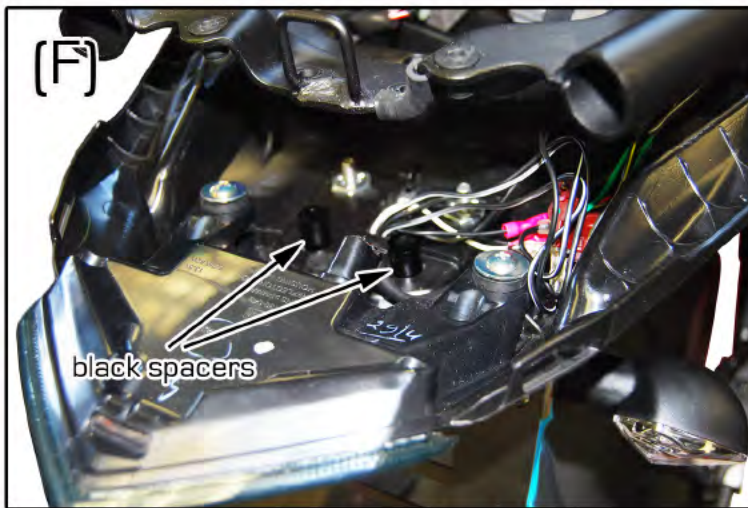
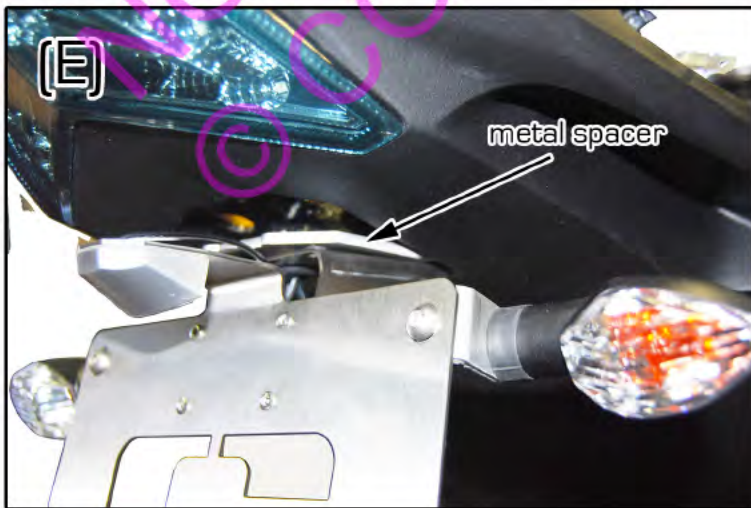
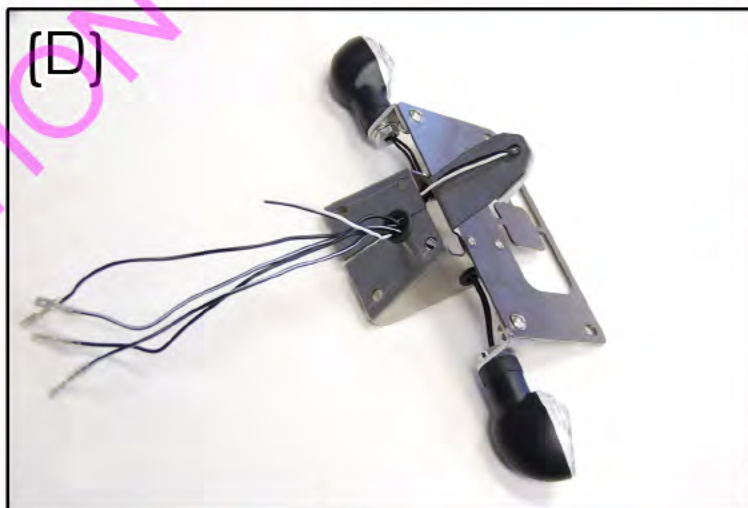
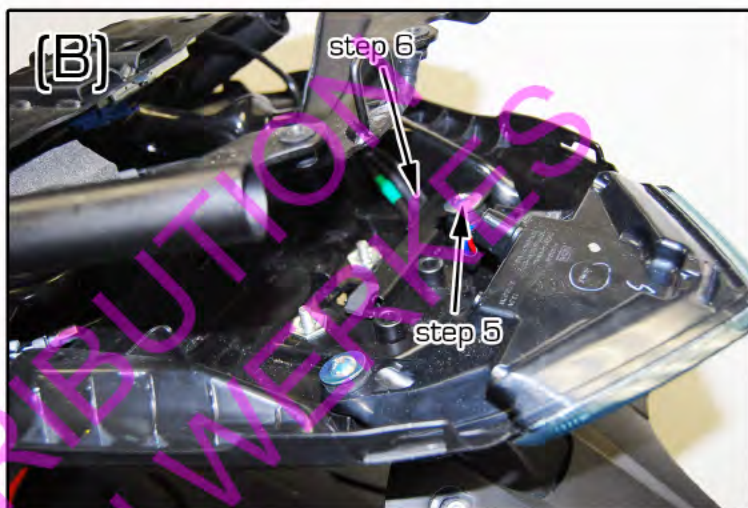


COMPETITION WERKES

<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

(800)736-2114

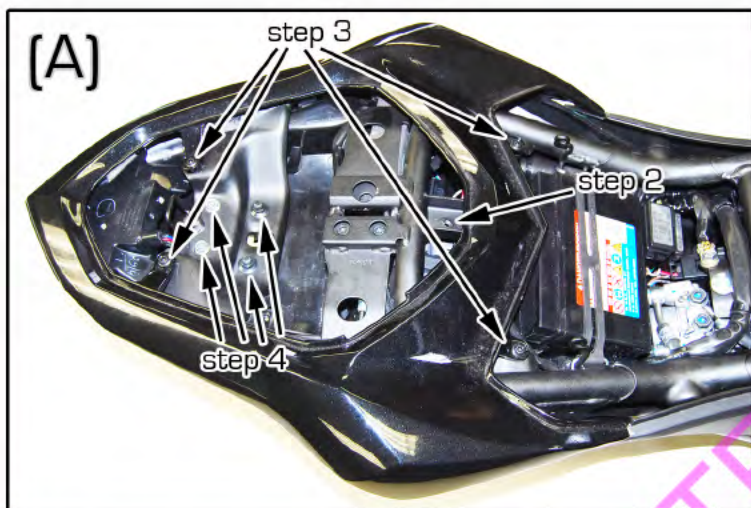

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1K800

COMPETITION WERKES

<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

(800)736-2114

Kawasaki z800

- REMOVAL:
- 1) Remove rear seat (use key).
 - 2) Remove front seat (1- bolt). *FIG (A)
 - 3) Remove tail section (4- allen bolts, slide back). *FIG (A)
 - 4) Lower rear fender (2- nuts, 2- bolts). *FIG (A)
 - 5) Remove wire retainer (1- phillips screw). *FIG (B)
 - 6) Cut wires going to rear fender *FIG (B). **Do NOT cut green wire!
 - 7) Remove rear fender (2- bolts). *FIG (C)

- ASSEMBLY:
- 1) Secure your license plate to Main Assembly (2- 6x10 allen bolts in lower holes backed with washers and nuts).
 - 2) Secure Signal Brackets to Main Assembly (2- 6x12 allen bolts in upper holes backed with washers and nuts). *FIG (D)
 - 3) Mount Turn Signals to Signal Brackets. *FIG (D)
 - 4) Route signal wires through grommets as shown in *FIG (D)
 - 5) Adhere License Light to Main Assembly and route wires as shown.

- INSTALL:
- 1) Replace Phillips screw holding taillight.
 - 2) Position Metal Spacer on Main Assembly *FIG (E). Secure to undertail with 2- 6x20 allen bolts in forward holes (into thin nuts).
 - 3) Connect signal wires. Use back of signal package as reference.
 - 4) Connect license light wires using Butt Connectors.
 - 5) Check lighting for proper function.
 - 6) Position Black Spacers as shown in *FIG (F)
 - 7) Lift undertail into position. Secure with 2- 6x30 allen bolts in rear holes (through spacers) with washers and nuts on top. Also place washers and nuts on forward bolts.
 - 8) Replace tail section and seats using stock hardware.

PARTS LIST:

- 1- Main Assembly
- 2- Signal Brackets
 - 1- Metal Spacer
- 2- Black Spacers (5/8")
 - 1- License Light
- 1- Pair Signals (S-1110-C)
 - 2- Small Grommets
 - 1- Medium Grommet
 - 2- 6x30 Allen Bolts
 - 2- 6x20 Allen Bolts
 - 2- 6x12 Allen Bolts
 - 2- 6x10 Allen Bolts
 - 8- Washers
 - 8- 6mm Nuts
 - 2- Butt Connectors



The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1K800