

# 2002 Kawasaki ZX9-R

**CAUTION: Stainless steel edges may be sharp!!!**

- 1) Remove rear seat cowl or seat. Remove front seat (2 bolts and bracket in storage area fig.E) Remove tail section (3 screws on top, 2 plastic screws on underside, disconnect seat latch cable at key mechanism, and unplug all wires at rear) Remove turn signals.
- 2) Remove tool bag and Velcro out of storage area. Relocate wires forward. Make cuts as shown in photos: **FIRST CUT**- along bottom of flange as shown in fig. D. **SECOUND CUT**- cut straight down at end of frame rails fig. D. **THIRD CUT**- connect side cuts as shown in fig. F.
- 3) Remove bolts at rear of frame rail, and install mounting brackets using stock bolts.

**FOR STANDARD KIT CONTINUE. LTD KIT GO TO STEP 9**

- 4) Fasten entire kit (fig. H.) to mounting brackets. Drill two ¼" holes through mounting points at front of main pan and insert ½" truss screw.
- 5) Replace bodywork. (Connect seat latch cable.)
- 6) Mount turn signals (use stock rubber grommet on back with supplied large washer). Run wiring up through grommet and connect wiring. Also plug in taillight.
- 7) Remount front seat.
- 8) Replace seat cowl or rear seat. Check lighting for proper operation.

**LTD (NOTE: SUPPLIED LIGHTING MAY NOT BE LEGAL IN SOME STATES.)**

- 9) Mount license plate to inner fender.
- 10) Remove two stock bolts near front of fender well. Lower fender and remove tow clips at these mounting locations.
- 11) Using two ¾" truss screws, mount inner fender (Make sure to remove backing off of two sided tape).
- 12) Using inner fender as template drill three holes for license plate light. Using supplied hardware mount license plate light, and connect wires using splicers provided. Black with white stripe to black with yellow. Black wire to red. Leave red wire from license light unconnected (protect end with tape).
- 13) Replace bodywork (connect seat latch cable).
- 14) Mount main pan using ½" truss screws at mounts and at seam.
- 15) Attach flushmount turn signals, run wires up through holes. Connect to stock plugs. (If using Assimilator install two 5/8" truss screws in these holes).
- 16) Check lock mechanism and lighting for proper operation.
- 17) Replace front seat.
- 18) Replace rear cowl or seat.

## STOCK WIRING

GROUND	BLACK W/YELLOW
BRAKE	BLUE OR BLUE W/RED
LEFT TURN	GREEN
RIGHT TURN	GREY
TAIL/RUNNING	RED

**STANDARD PARTS:** MAIN PAN, LICENSE PAN, TWO SIGNAL BRACKETS, TWO MOUNTING BRACKETS, TWO ½" TRUSS SCREWS, SIX ½" SCREWS, ONE MEDIUM GROMMET, FOURTEEN WASHERS, EIGHT NUTS, AND TWO 3/8" WASHERS.

**LTD PARTS:** INNER FENDER, MAIN PAN, TWO MOUNTING BRACKETS, TURN SIGNALS OR ASSIMILATOR, LICENSE LIGHT, FOR 5/8" TRUSS SCREWS, TWO ½" TRUSS SCREWS, FOUR ½" SCREWS, FOURTEEN WASHERS, TEN NUTS, FOUR BUTT CONNECTORS, AND TWO WIRE SPLICE'S.



2002 Kawasaki ZX9-R




A



B




C

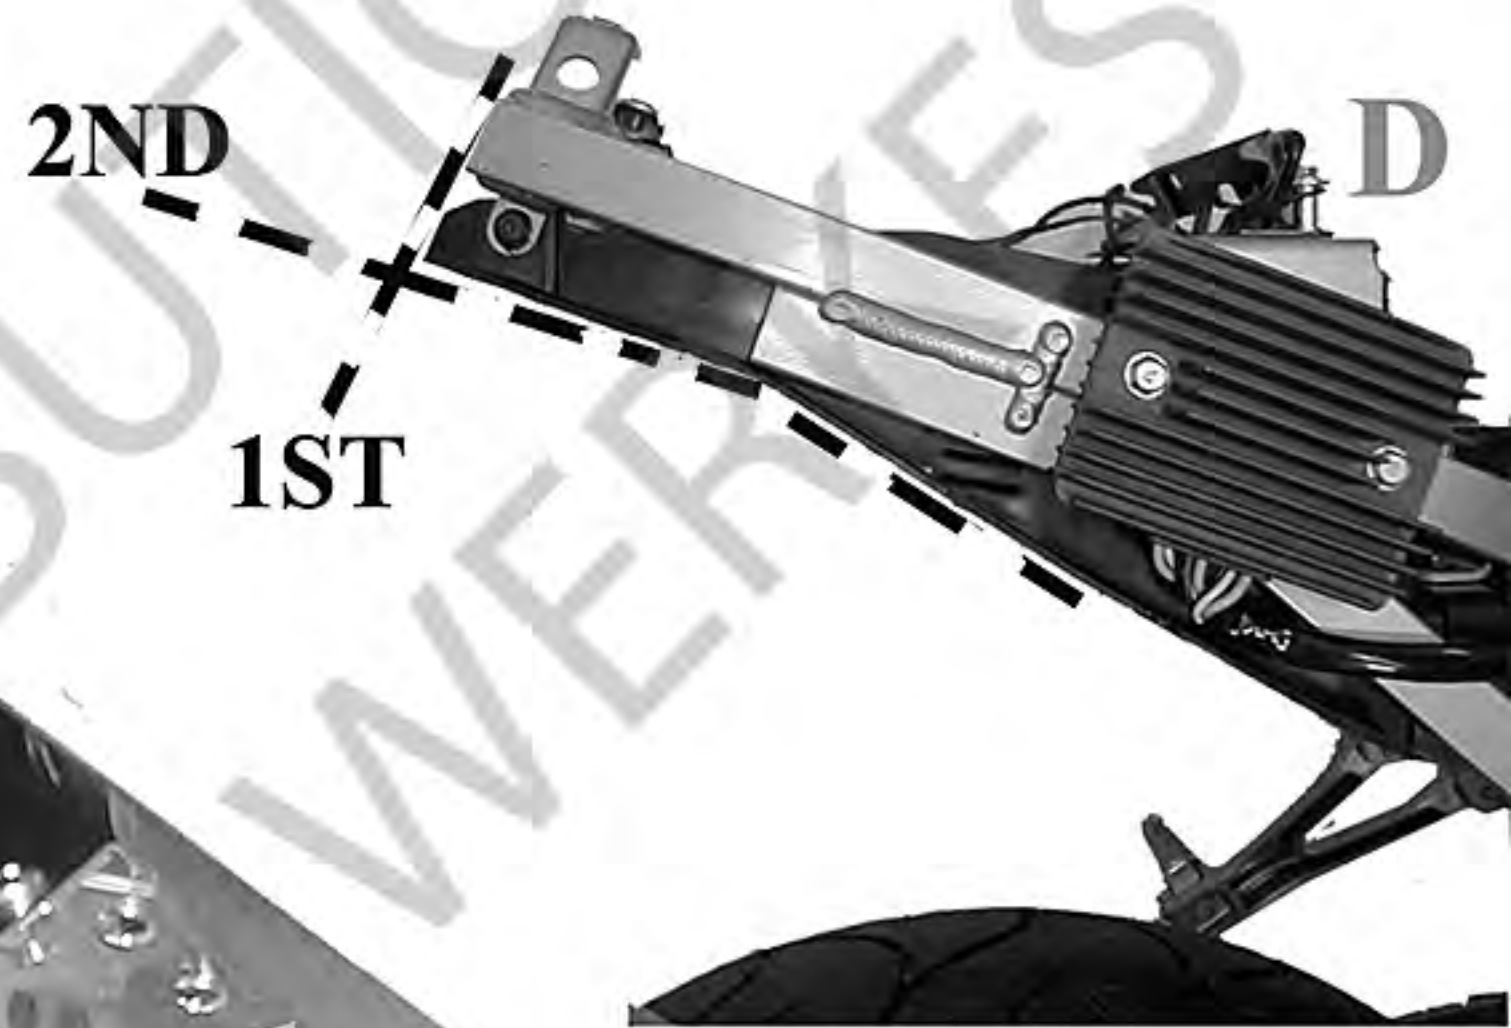

2ND

1ST

D

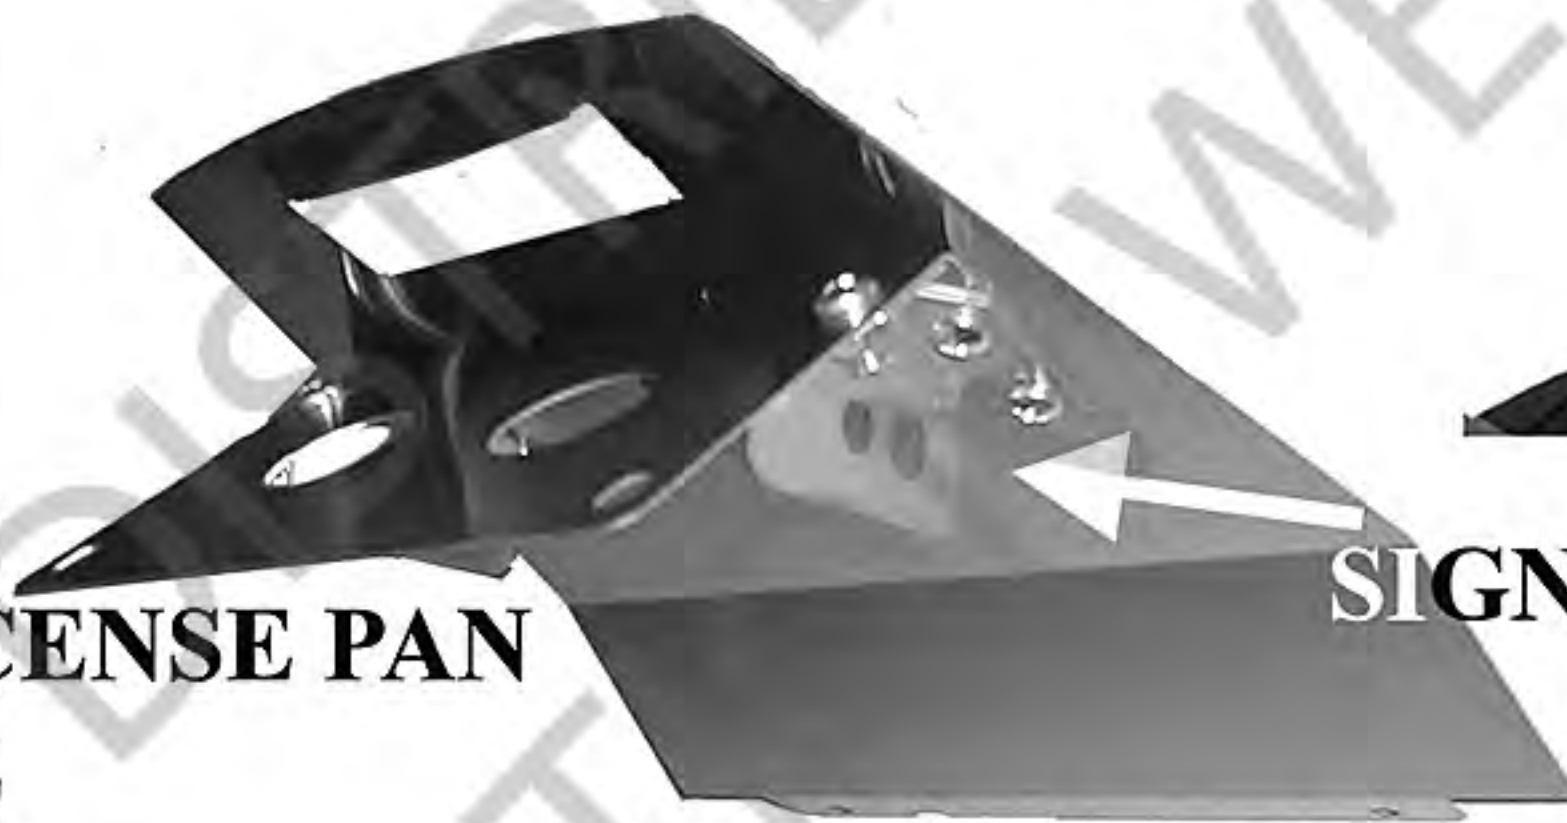


LICENSE PAN

SIGNAL BRACKET



E

H MAIN PAN

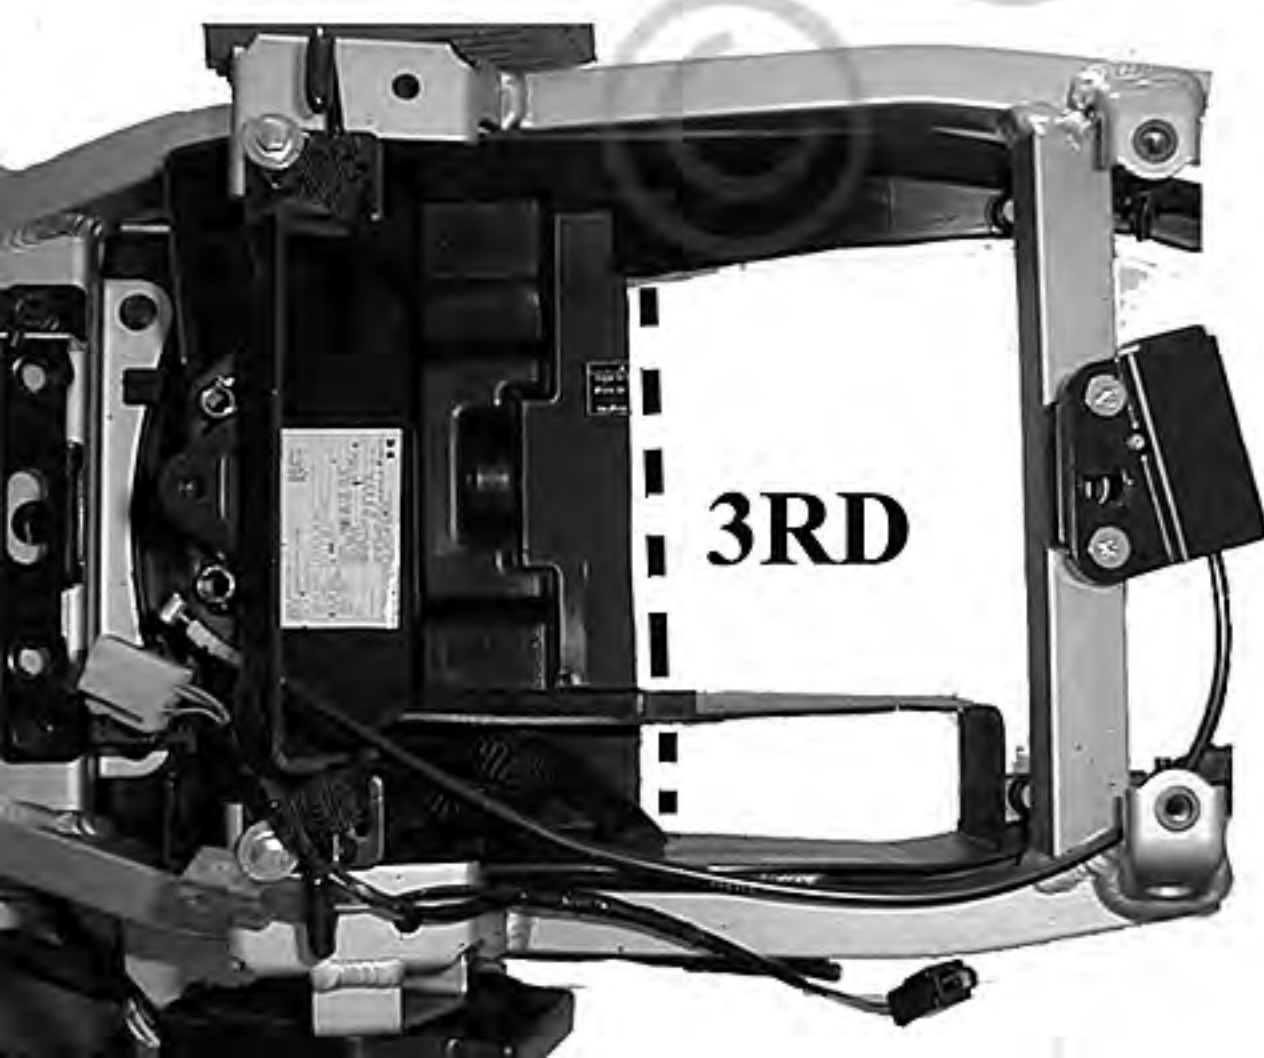

F

3RD



G