
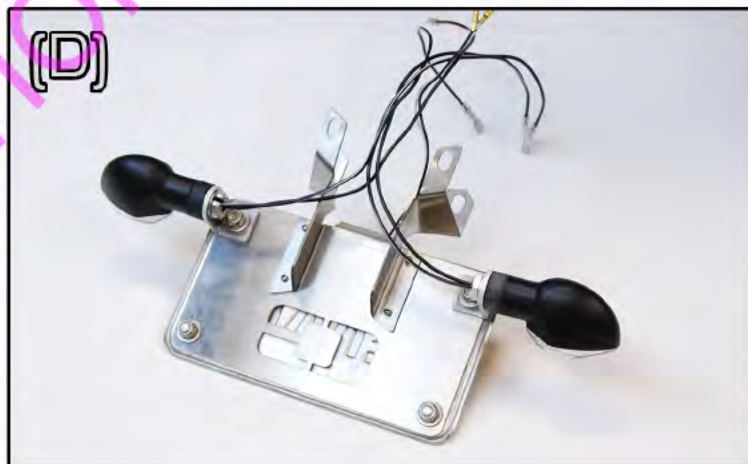


<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

(800)736-2114

Page 1

KTM Super Duke 1290r

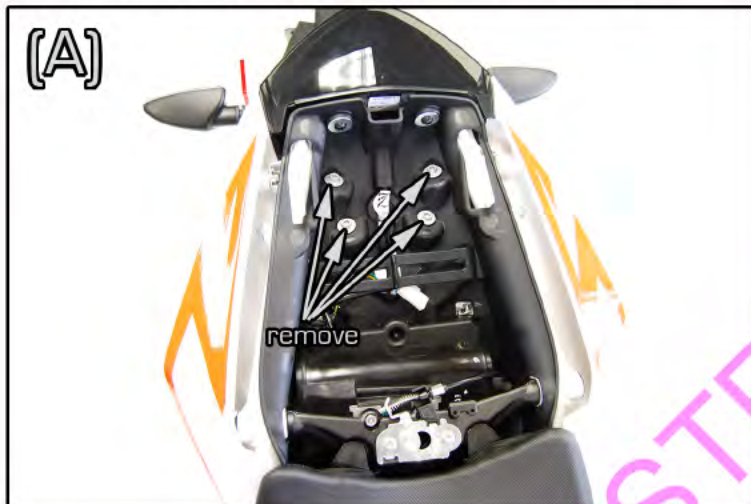

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1KT1290



<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

(800)736-2114

Page 2

KTM Super Duke 1290r

- REMOVAL:**
- 1) Remove back seat (use key).
 - 2) Slide rubber storage strap forward.
 - 3) Unplug rear fender wire harness (the largest one).
 - 4) Remove rear fender (4- T-30 bolts). *FIG (A)
 - 5) Cut wires from rear fender as shown in *FIG (B).
 - 6) Strip black protective cover back to expose wires. *FIG (C)
- INSTALL:**
- 1) Secure your license plate to License Assembly (2- 6x10 allen bolts in bottom holes backed with washers and nuts). *FIG (D)
 - 2) Mount Signal Brackets to License Assembly (2- 6x12 allen bolts in upper holes backed with washers and nuts). *FIG (D)
 - 3) Mount Short Stalk Signals to Signal Brackets. *FIG (D) *NOTE* Be careful not to damage wires.
 - 4) Adhere License Light to License Assembly. *FIG (E)
 - 5) Snip bullet ends off license light wires and exchange for supplied Spade Connectors.
 - 6) Route wires into storage area, align all four tabs of assembly, and push assembly into place.
 - 7) Finger tighten all four stock mounting bolts. Due to the varying angles of tabs some persuasion may be required. Tighten all bolts
 - 8) Plug in wire harness from rear fender.
 - 9) Connect License Light wires (2- splice connectors). *See color chart.
 - 10) Connect Short Stalk Signal wires. *See color chart. *NOTE* 50/50 chance of getting this right on first attempt.
 - 11) Check lighting for proper function.
 - 12) Adjust Short Stalk Signals to correct angle. Study *FIG (F).
 - 13) Replace seat.

PARTS LIST:

- 1- License Assembly
- 1- Pair Short Stalk Signals (S-1110-C)
- 1- License Light
- 2- Signal Brackets
- 2- 6x10 Allen Bolts
- 2- 6x12 Allen Bolts
- 4- 6mm Nuts
- 4- Washers
- 2- Spade Connectors
- 2- Splice Connectors

COLOR CHART:

KTM

- Brown = Ground
- Yellow = License Light
- Grey w/ stripe = Turn Signals

SIGNALS

- Black w/ stripe = Ground
- Black = Positive

LICENSE LIGHT

- Black = Ground
- White = Positive

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1KT1290