




# COMPETITION WERKES

(800)736-2114

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

- REMOVAL:
- 1) Remove rear seat (use key).
  - 2) Remove rear fender (4- bolts from underneath). \*Unplug red, green, and grey connectors.
  - 3) Cut license light wires (4" from the red connector) from rear fender and plug back into corresponding connector in storage.
  - 4) Disassemble rear fender as needed to remove turn signals

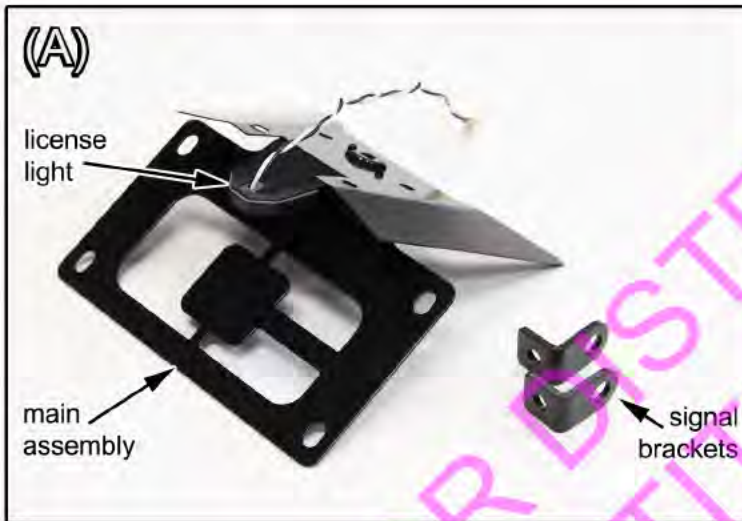

- INSTALL:
- 1) Adhere License Light to Main Assembly \*FIG (A).
  - 2) Mount your license plate to Main Assembly (2- 6x10 Allen Bolts in lower holes).
  - 3) Use 6x12 Allen Bolts in upper holes. Attach Signal Brackets at this time.
  - 4) Secure Main Assembly to bike (4- 6x12 Allen Bolts). Route the signal wires through grommet and into storage area. \*FIG (B)
  - 5) Connect wires and check lighting for proper function.
  - 6) Replace rear seat.

#### WIRING CHART:

LEFT SIGNAL= GREEN CONNECTOR  
RIGHT SIGNAL= GREY CONNECTOR  
LICENSE LIGHT= RED CONNECTOR

\*Ground wires are black/yellow

#### PARTS LIST:

1- Main Assembly	2- Signal Brackets
1- License Light	2- Butt Connectors
6- 6x12 Allen Bolts	2- 6x10 Allen Bolts
4- 6mm Nuts	8- Washers

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1KT392