


## 2005 SUZUKI GSXR1000 FENDER ELIMINATOR KIT INSTRUCTIONS

1. REMOVE: REAR SEAT, FRONT SEAT (2 ALLEN BOLTS ON SIDES), LEFT SIDE OF TAIL SECTION (3 PLASTIC RIVETS, PUSH CENTER IN AND PULL ON OUTER EDGE, 1 PHILLIP SCREW-SEE FIG.B).
2. DISCONNECT: LICENSE LIGHT WIRING (LIFT TAB TO RELEASE). LEFT TURN SIGNAL WIRING (PUSH TAB TO RELEASE). SEAT LATCH CABLE (PULL OUT OF MOUNT AND AROUND LATCH UNTIL THE BALL END RELEASES).
3. REMOVE REAR FENDER (FOUR BOLTS ON BOTTOM-SEE FIG. C).
4. ADHERE LICENSE LIGHT TO LICENSE MOUNT-SEE FIG. G. CUT WIRES FROM LIGHT SO THEY ARE NO MORE THAN 2" LONG. USING SUPPLIED BUTT CONNECTORS, CONNECT THE WIRE EXTENSION AND ROUTE THROUGH LARGE HOLE.
5. MOUNT LICENSE MOUNT TO SWINGARM-FIG D. USE THE CENTER BOLT AT FRONT OF HUGGER FENDER. SLIDE THE LICENSE MOUNT BETWEEN THE SWINGARM AND THE HUGGER FENDER. ALIGN BEFORE TIGHTENING BOLT.
6. INSERT WIRE EXTENSION THROUGH BLACK TUBING SUPPLIED. ROUTE OVER TO BRAKE LINE AND UP INTO SEAT AREA ABOVE. USE ZIP-TIES AS NEEDED-FIG D. CONTINUE ROUTING THE WIRE THROUGH CROSS BRACE-FIG E. NOTE: WE RECOMMEND USING THE CONNECTOR FROM THE STOCK LICENSE LIGHT. USE BUTT CONNECTORS SUPPLIED AND CONNECT.
7. INSTALL COVER PLATE AT REAR, INSERT THE FRONT TABS AND MOUNT WITH 2 ALLEN BOLTS SUPPLIED.
8. MOUNT LEFT SIDE OF TAIL SECTION. MAKE SURE TO CONNECT THE TURN SIGNAL AND SEAT LATCH CABLE.
9. REPLACE SEATS.

PARTS LIST: 1 - LICENSE MOUNT, 1 - COVER PLATE, 1 - LICENSE LIGHT, 1 - 14" BLACK TUBING, 1 - 36" WIRE EXTENSION, 4 - BUTT CONNECTORS, 2 - SMALL ZIP TIES, 4 - 6x10 ALLEN BOLTS, 4 - NUTS, 4 - WASHERS, 2 - 6X16M ALLEN BOLTS.



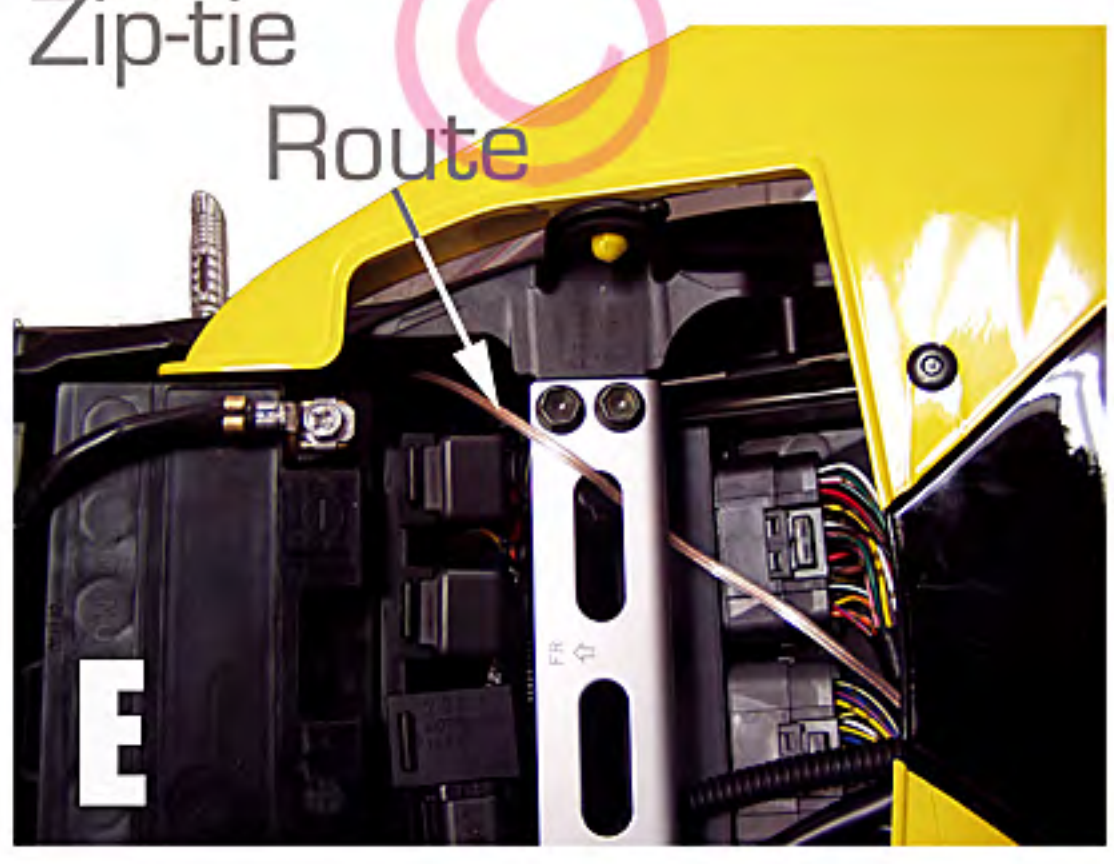

**SUZUKI**  
**GSXR 1000**

