




06 YAMAHA FZ1 LTD Fender Eliminator Kit.

- Remove:** Front & Rear seats. To release front seat, reach in from behind and push lever to the left.
- Remove:** The 8 Plastic rivets underneath & around undertail pan. To release the rivets push the center plunger in about 1/8", and then pry rivet out with fingernail or small screwdriver.
- Remove:** 4 bolts as shown *FIG(A) that hold on the rear fender. Let the fender hang loose for now.
- Remove:** the 6 bolts & 2 plastic rivets as shown *FIG(A). These 2 plastic rivets are removed by unscrewing the center plunger about 3 or 4 turns, and then pry out.
- Remove:** Painted tail section by grasping the 2 side rails, pulling back about 3 - 4" and then lifting one side up and off while dropping the other side. Unplug tail light as you do.
- Remove:** 2 bolts holding inner brace and remove. FIG*(B) Unplug turn signals ,Lic light. FIG*(E), and remove fender.
- Attach:** License plate using four 1/4 x 3/8" screws, mount license light to fender kit as shown in figures *(C) & (D). Cut 14" of wire and connector from stock license light. Before splicing test light for correct polarity by touching wires together with key on, if light does not come on reverse wires. Once the correct polarity is determined splice wires together using pink connectors.
- Next:** This step is easier with 2 people. Set undertail in place with fender kit directly underneath with 4 large grommets in between FIG*(C). Be sure to feed wires up through center hole in undertail pan FIG*(C). Insert four 8m x 30m bolts supplied from underneath, with nuts on top. Connect license plate light.
- Replace:** inner brace, and tail section. Replace only 6 rivets underneath, leaving the two center rivets out for the turn signals See diagrams. Cut 12" of wire with connectors from stock turn signals. Attach the outer sided adhesive to the flushmount turn signals, and adhere to bike over the center rivet holes underneath as shown FIG*(D). Feed wires up through grommet hole as you do. Fish wires up the sides and splice to the 12" section of wire. You can connect to either white wire. Check that all lights work properly.
- Replace:** seats.

PARTS LIST

1 - fender kit	4 - large grommets	6 - pink connectors
1- Pair of Turn signals	4 - 8m x 30m bolts	4 - 1/4 x 3/8 screws
1 - LED Lic Light	4 - 8m nuts	4 - 1/4 nylock nuts

1Y1007LTD

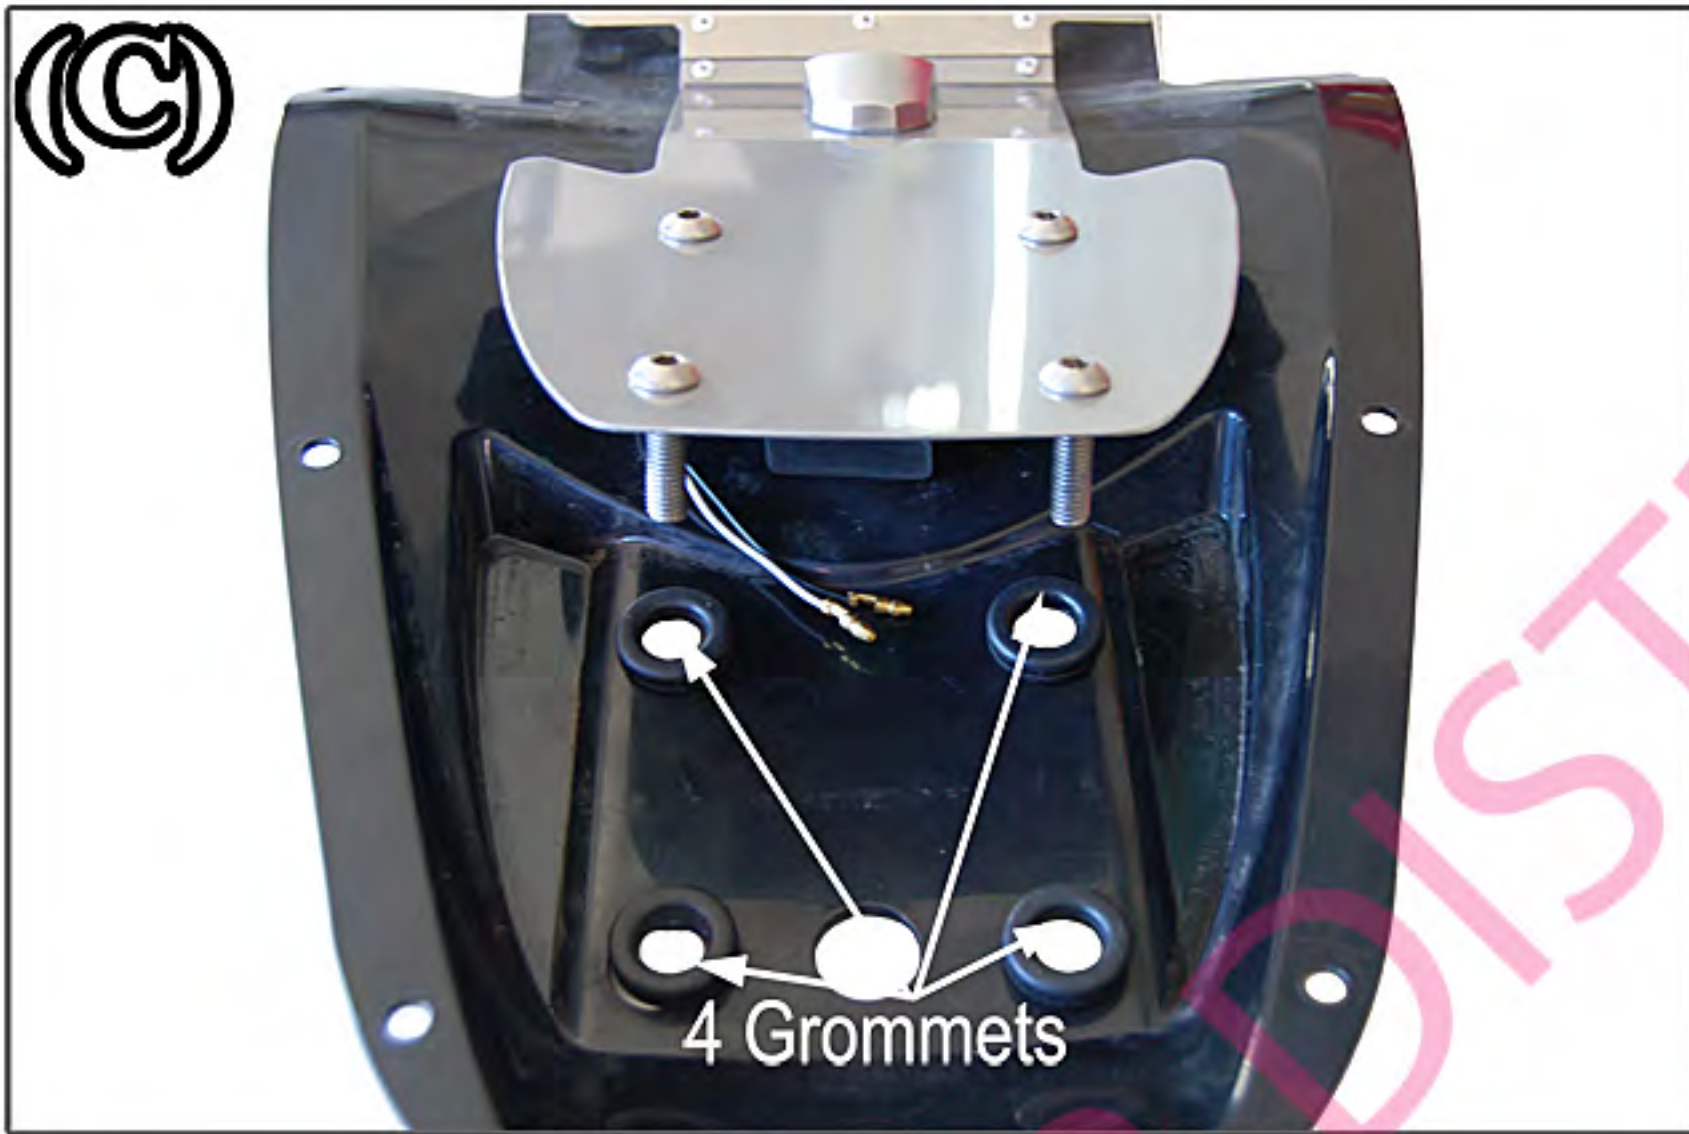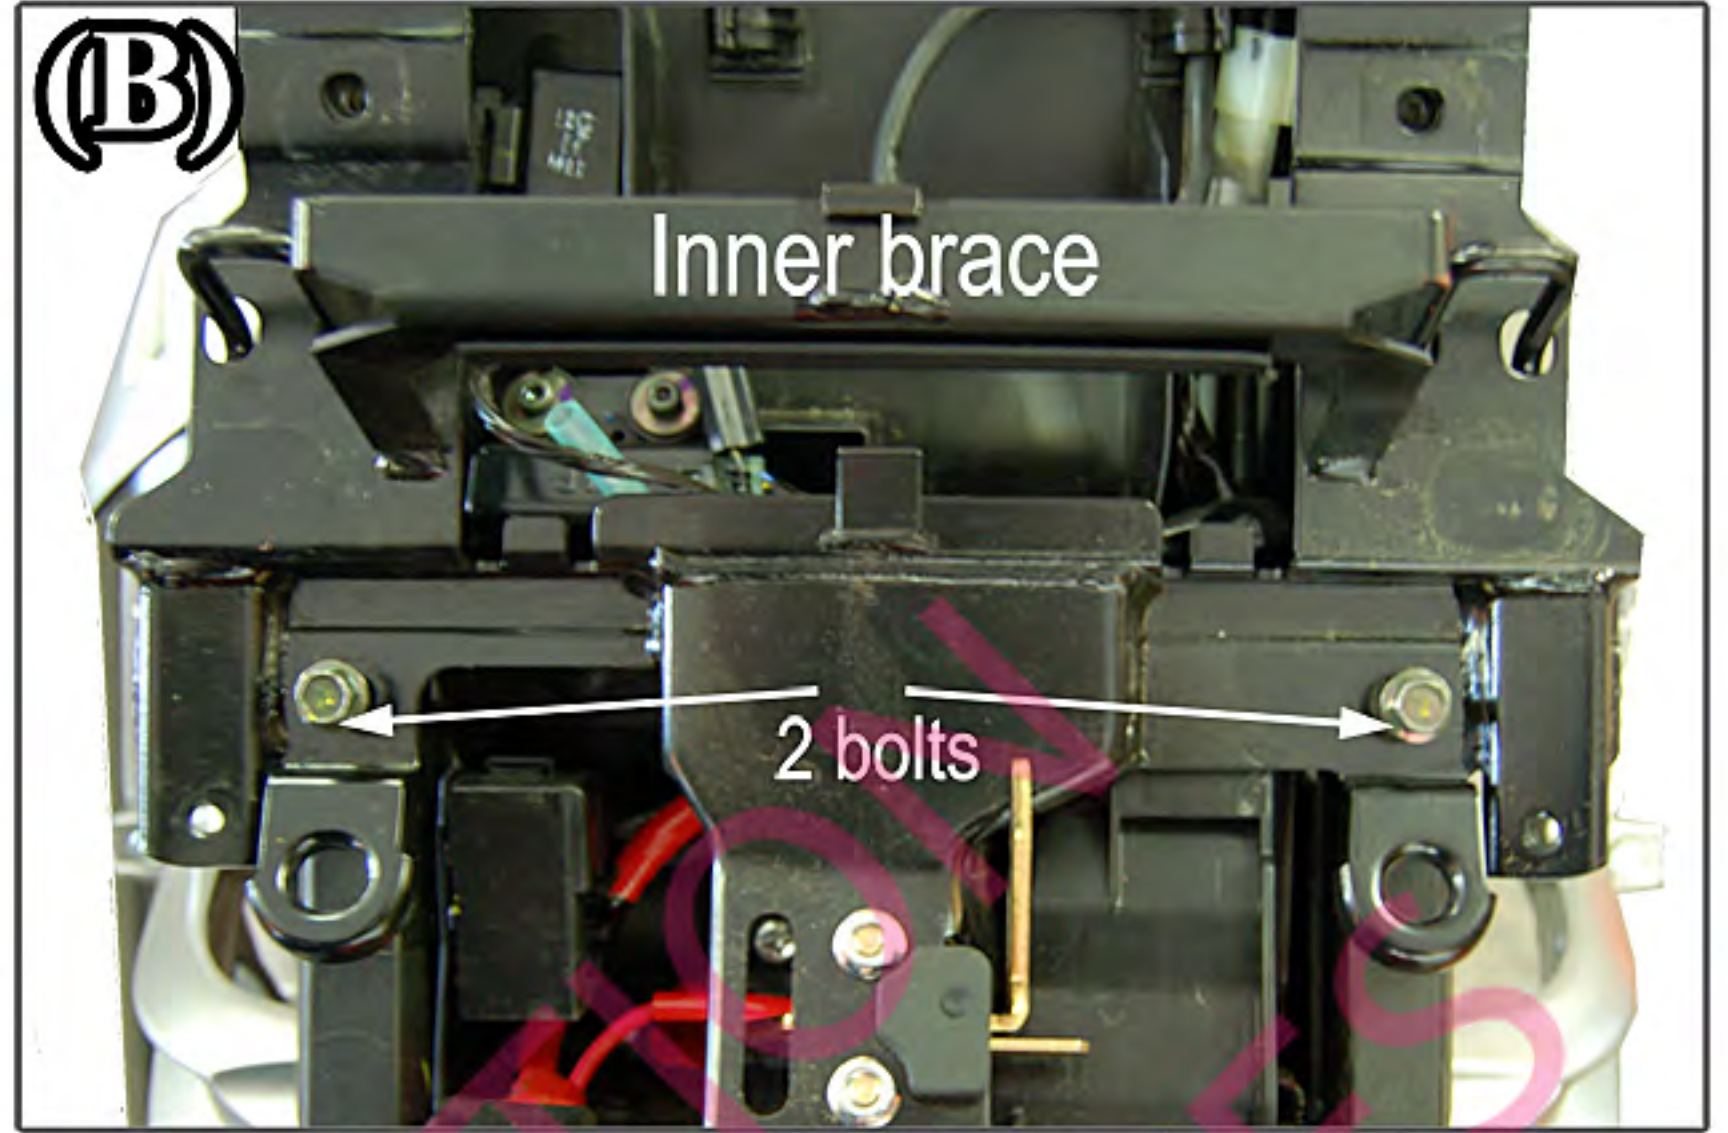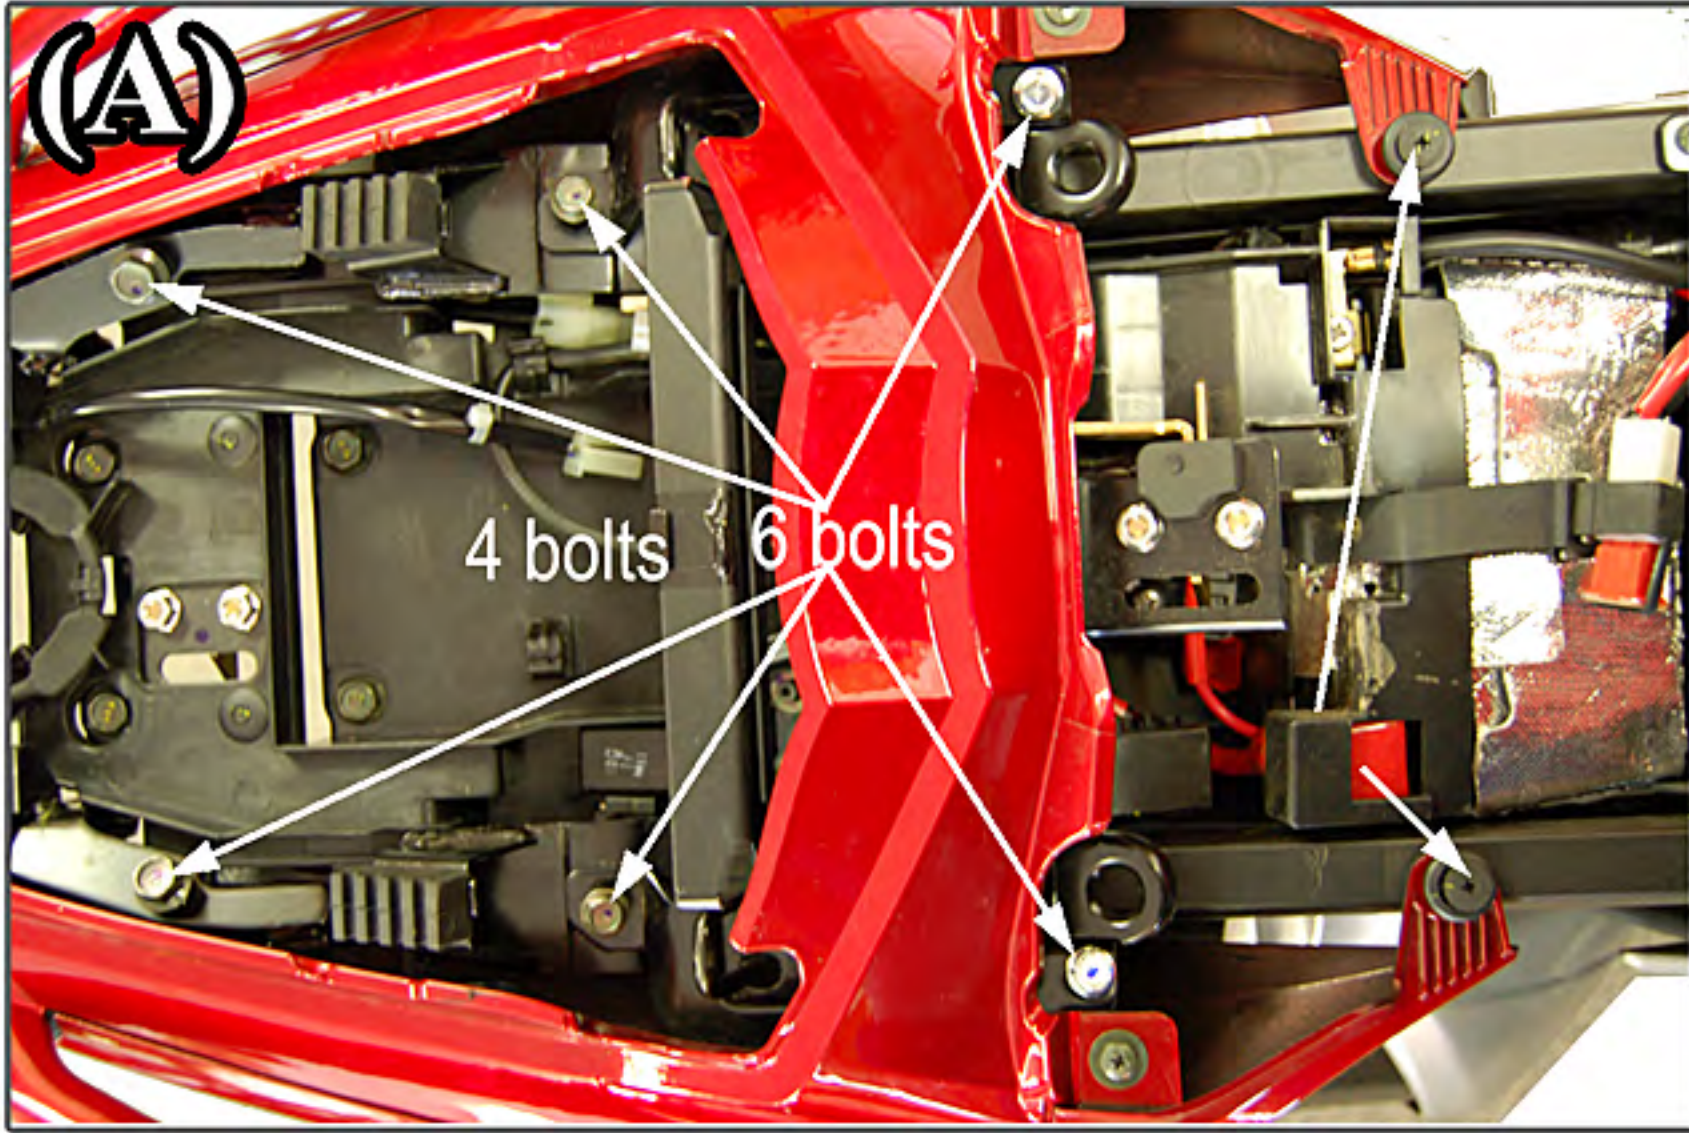

06 FZ1 YAMAHA
LTD Fender Eliminator

