
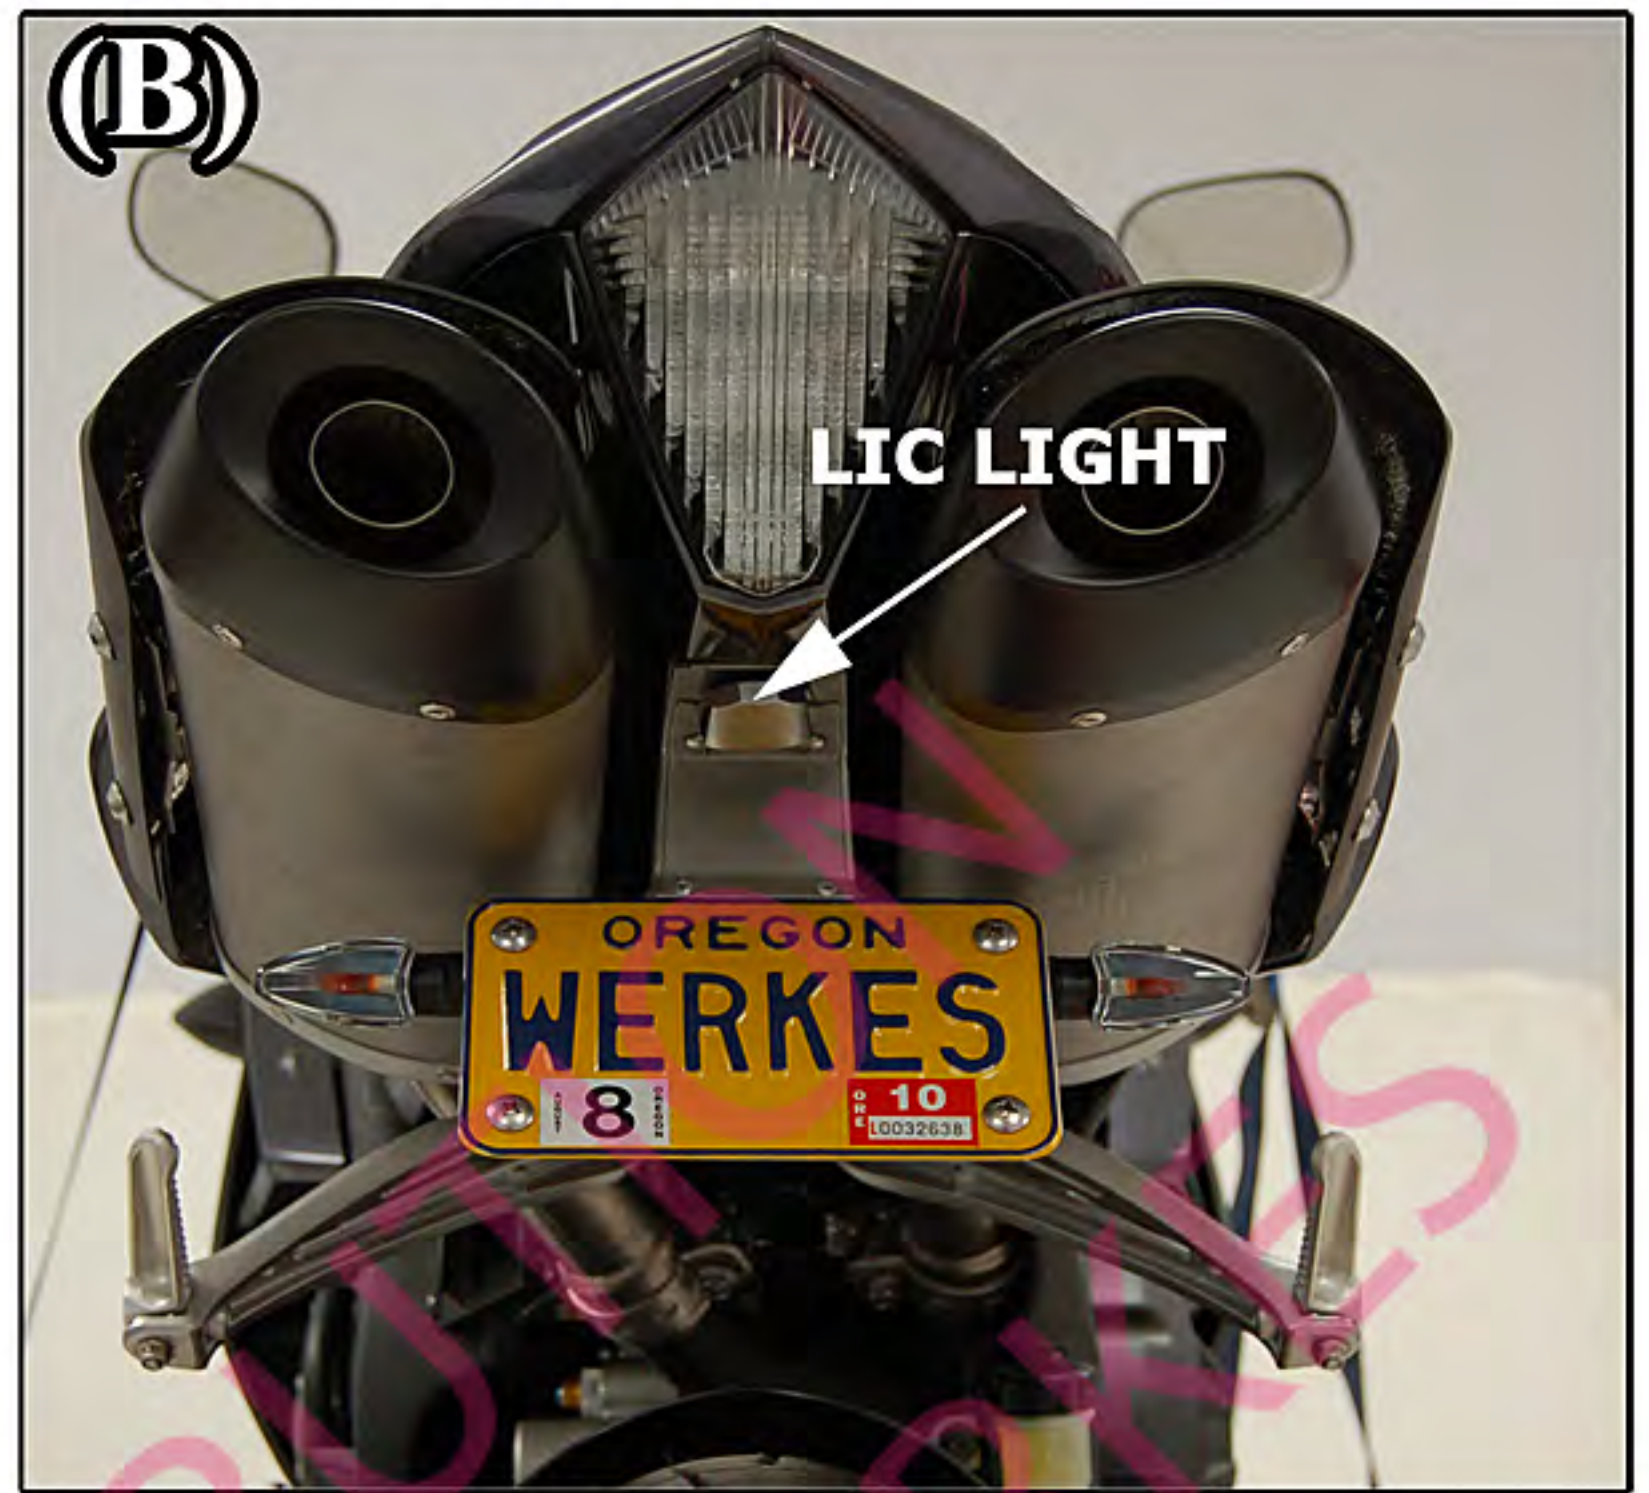


# 07 YAMAHA R1 STANDARD FENDER ELIMINATOR

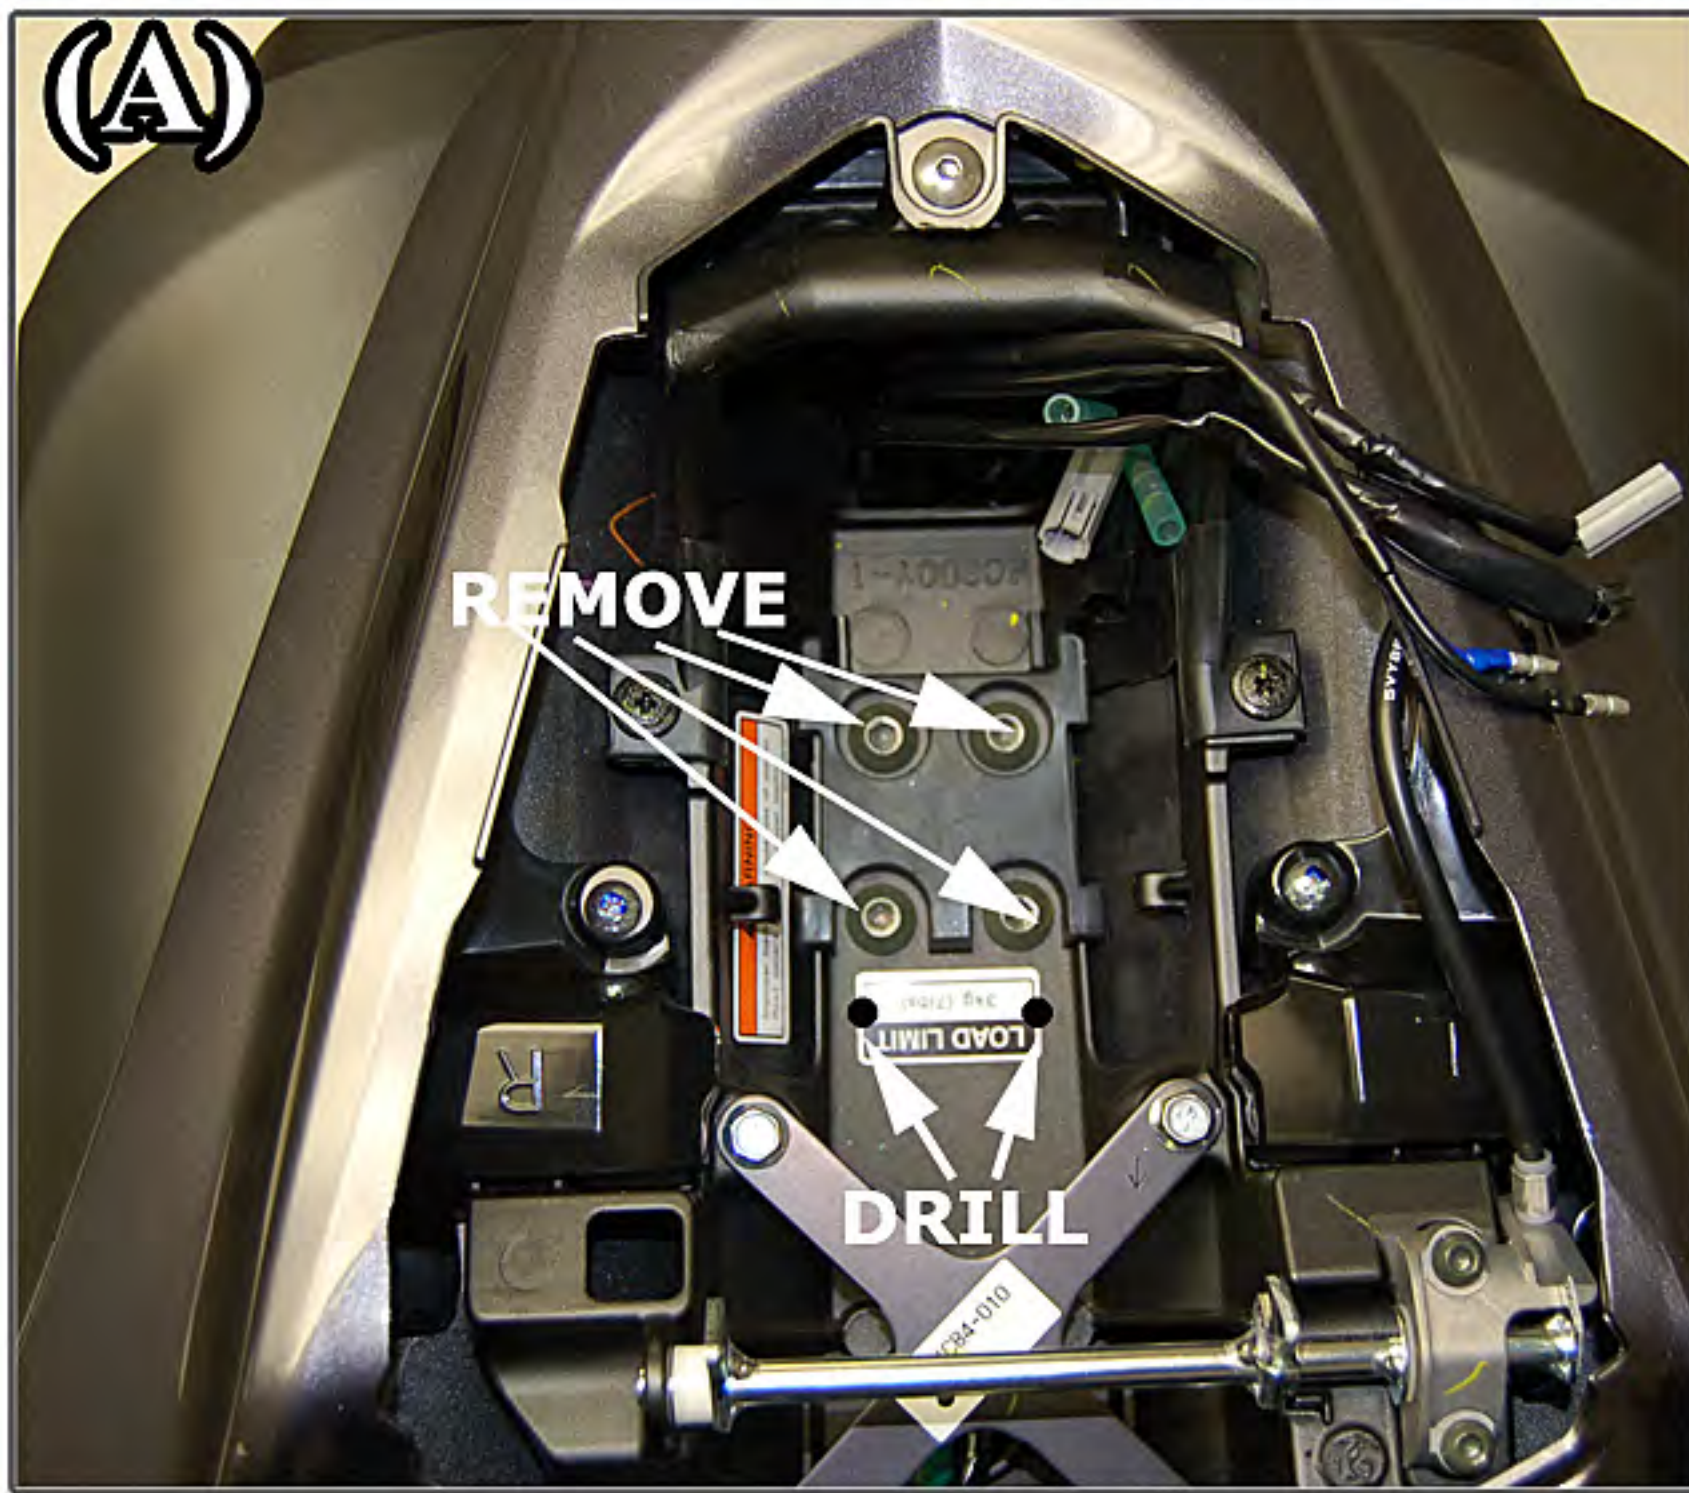

**Remove:** Rear seat, and tool kit.

**Unplug:** Wiring (1 - blk, 1 - grey, 2 - bullet plugs) FIG(A).

**Remove:** Rear fender (4 - Allen bolts in storage area) FIG(A).

**Drill:** 1/4 holes as shown in FIG(A). \*NOTE\* clear path of wiring!!

**Mount:** Lic pan using 2 - 6x25 Allen bolts, washers & nuts on top.

**Adhere:** Lic light to Lic pan (run wires into storage area through obround hole). FIG(B)

**Cut:** Wiring from stock lighting about 4" from connectors.

**Mount:** Turn signals to signal brackets (leave loose).

**Place:** Lic plate to Lic pan. Secure w/ 2 - 6x10 Allen bolts on bottom. Use 6x12 Allen Bolts on top securing Turn signal brackets. FIG(B) Adjust signals and tighten. FIG(C)

**Crimp:** 4" wire leads to supplied lighting using Butt connectors, and plug in.  
\*CHECK FOR PROPER FUNCTION.

**Replace:** Tool kit and seat.



# 07 YAMAHA YZF1000 R1 Fender Eliminator

## PARTS LIST

- 1 - License Pan
- 1 - License Light
- 1 - Pair of SS V signals
- 2 - Turn signal brackets
- 2 - 6x25 Allen Bolts
- 2 - 6x12 Allen Bolts
- 2 - 6x10 Allen Bolts
- 6 - Washers
- 6 - Nuts
- 6 - Butt connectors