


09 YAMAHA R1

Standard Fender Eliminator


<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

- REMOVE:** Rear seat (key), front seat (2 allen bolts under corners), top of tail section (2 plastic rivets 1 allen bolt on top, 2 plunge rivets on bottom, spread front out and slide back, unhook seat latch cable), rear fender (3 allen bolts in storage area, unplug signals and license light wires. *FIG (A)).
- MOUNT:** License plate to Main Pan (use 6x10 Allen Bolts in lower holes), Signal Brackets (use 6x12 Allen Bolts in upper holes), and Turn Signals. *FIG (B)
- ADHERE:** License Light to Main Pan (route wires out the large hole).
- ROUTE:** Turn Signal wires through grommet and out the large hole.
- POSITION:** 6x30 Allen Bolt in rear most hole and insert allen wrench through grommet. *FIG (B)
- MOUNT:** Main Pan to undertail and secure with washer and 6m nut on top. 6x25 Allen Bolts go in forward holes.
- CONNECT:** Wiring and check for proper function.
- REPLACE:** Tail section (hook up cable) and seats. Use stock hardware.

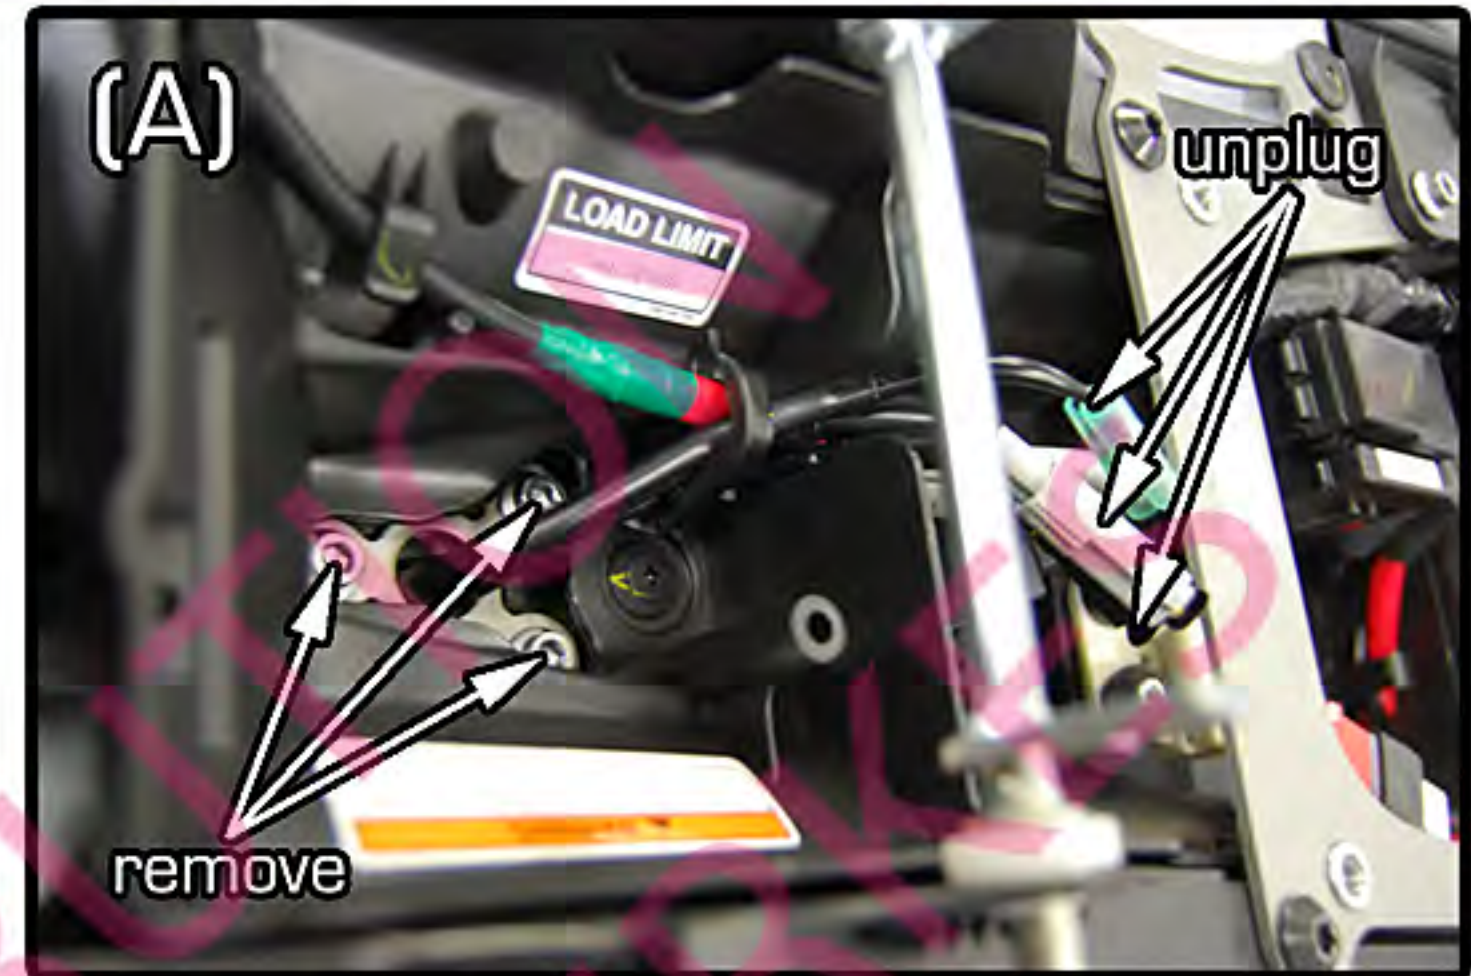

PARTS LIST:

- 1- Main Pan
- 2- Signal Brackets
- 1- Pair Short Stalk Signals
- 1- License Light
- 1- 6x30 Allen Bolt
- 2- 6x25 Allen Bolts
- 7- 6m Nuts
- 2- 6x10 Allen Bolts
- 2- 6x12 Allen Bolts
- 7- Washers
- 1- Med. Grommet

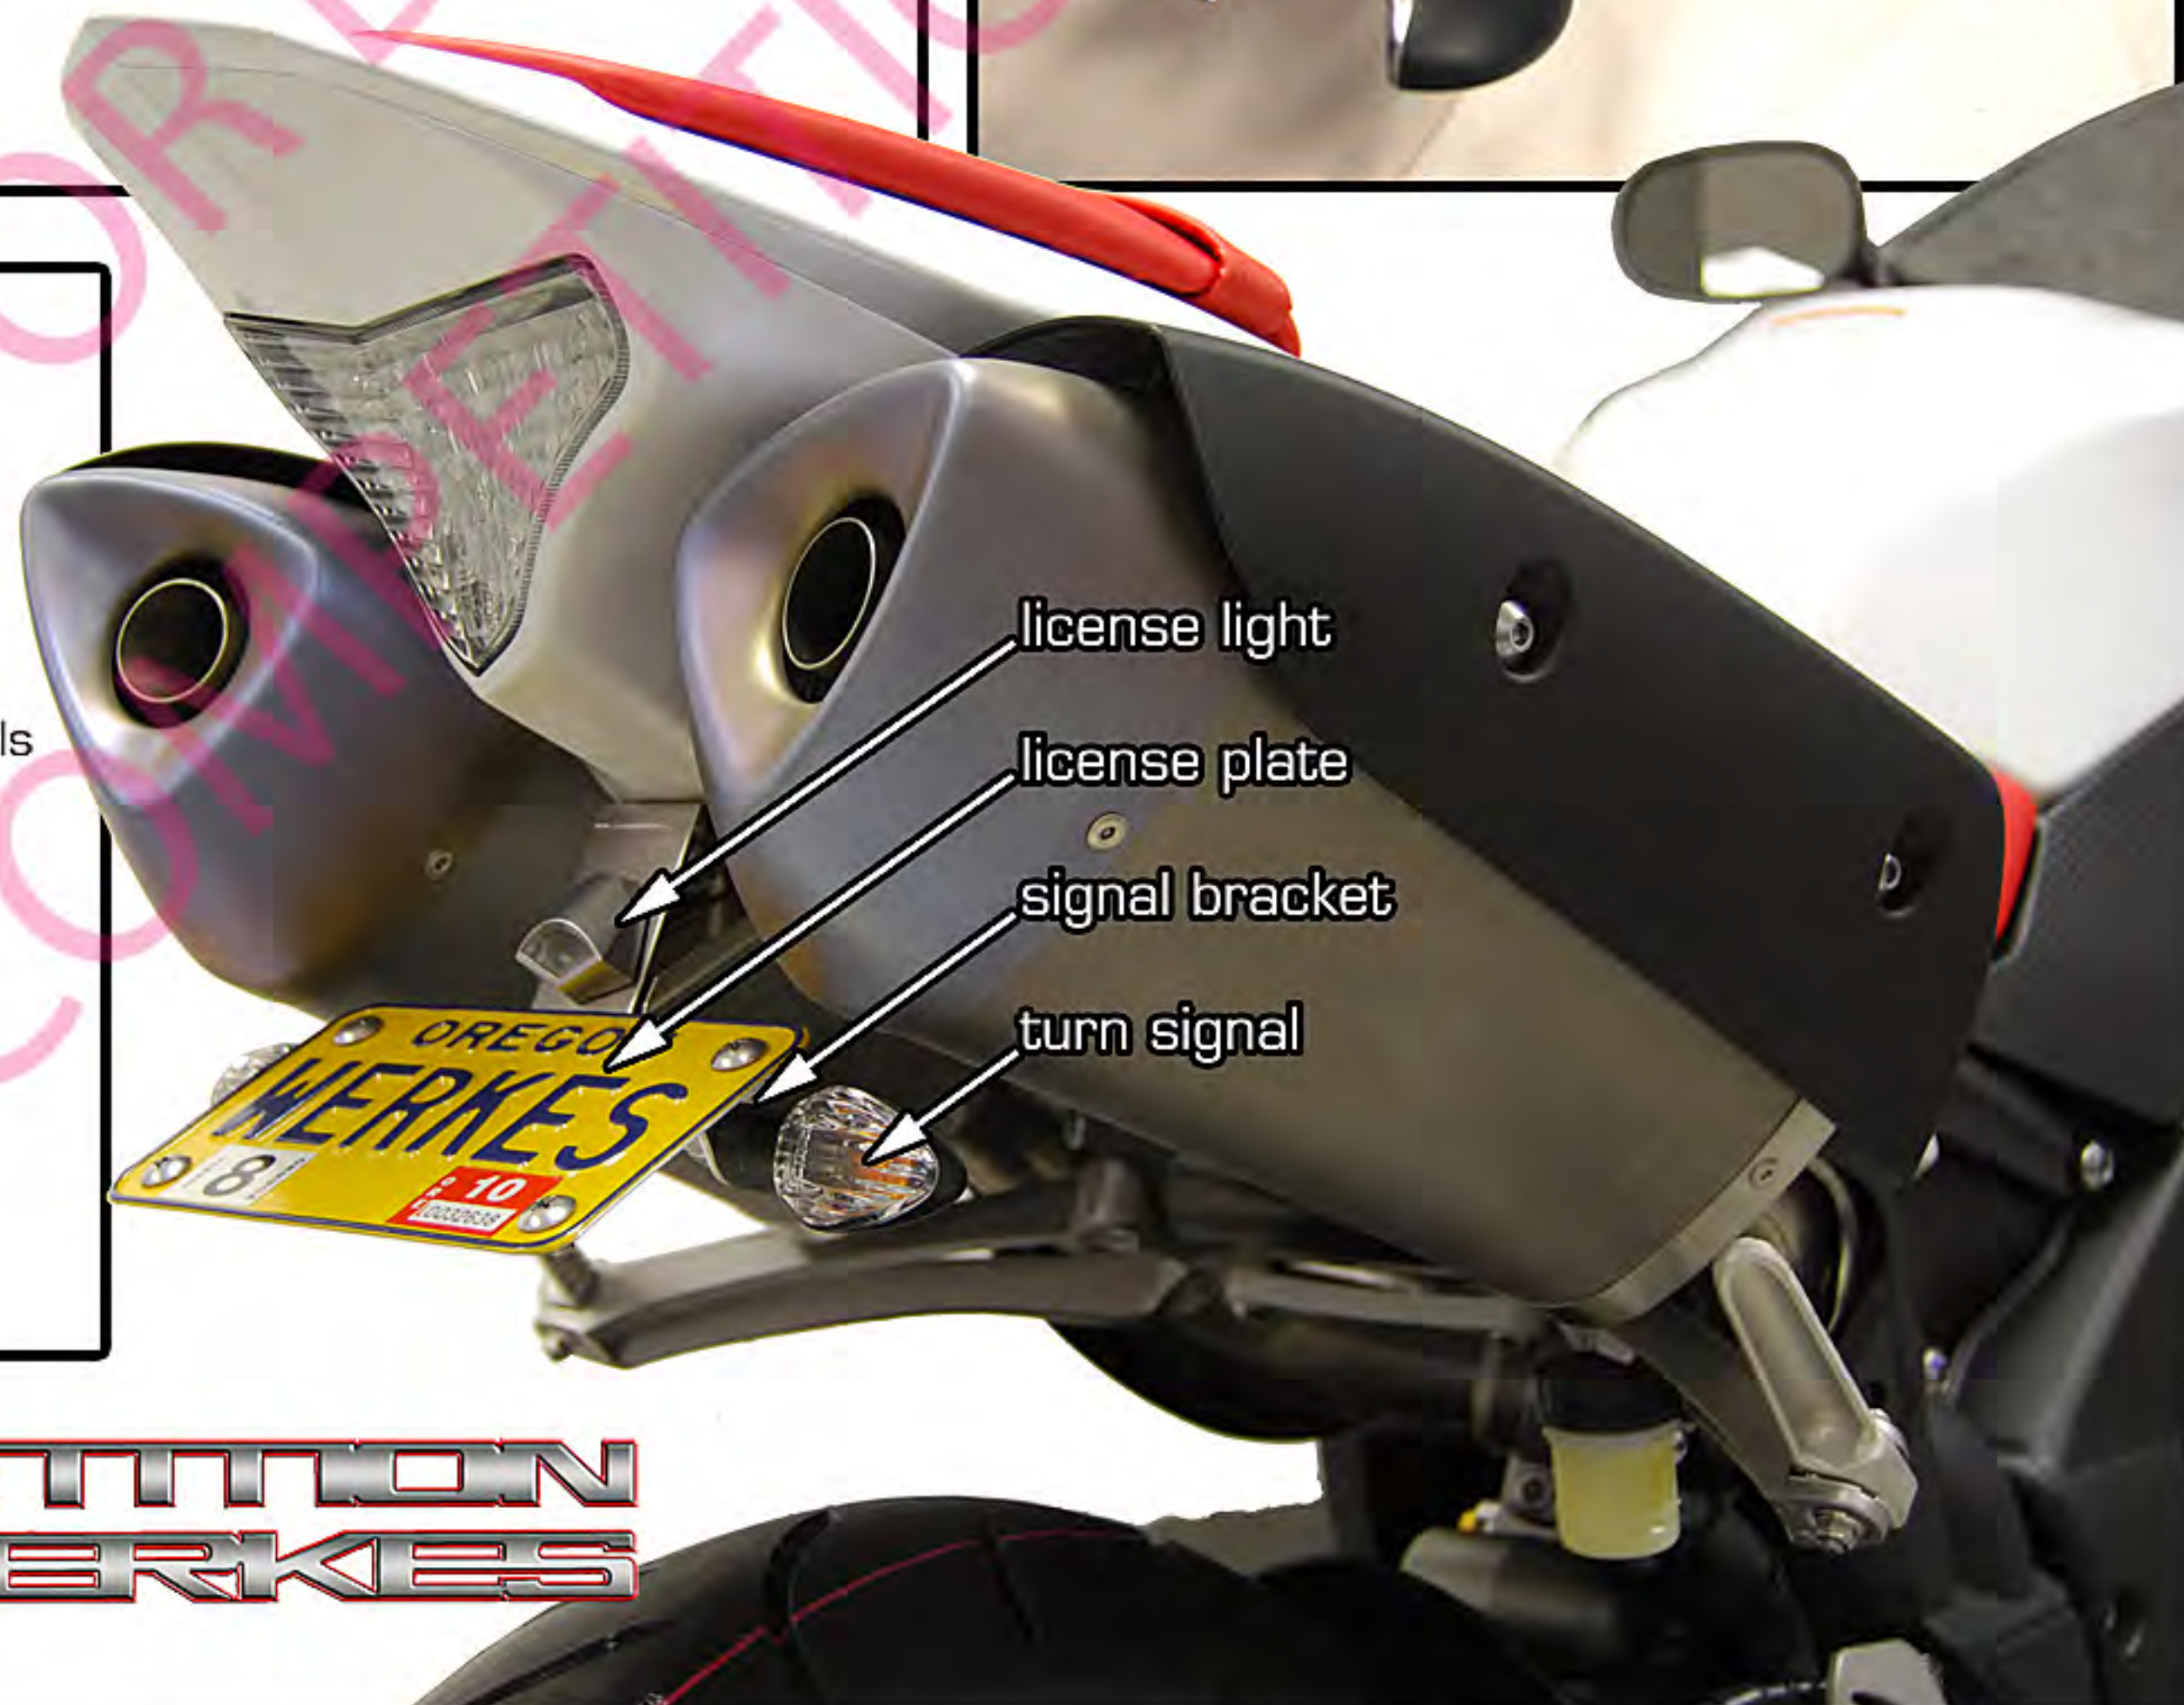

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.