



Yamaha YZF-R3 Fender Eliminator

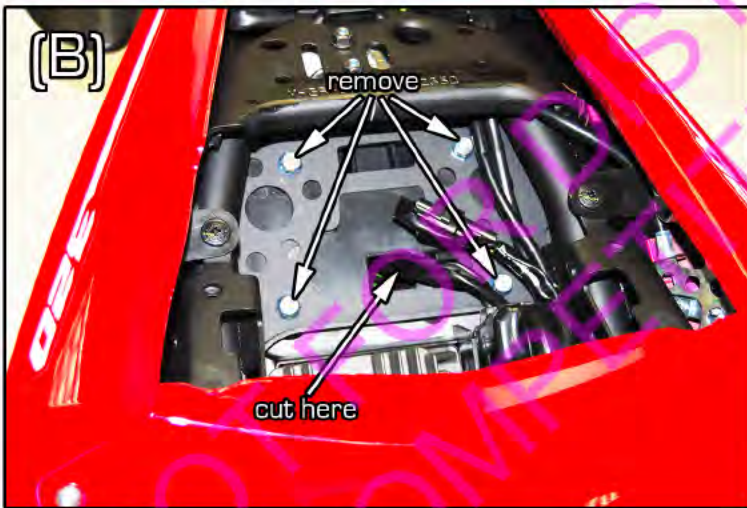

<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

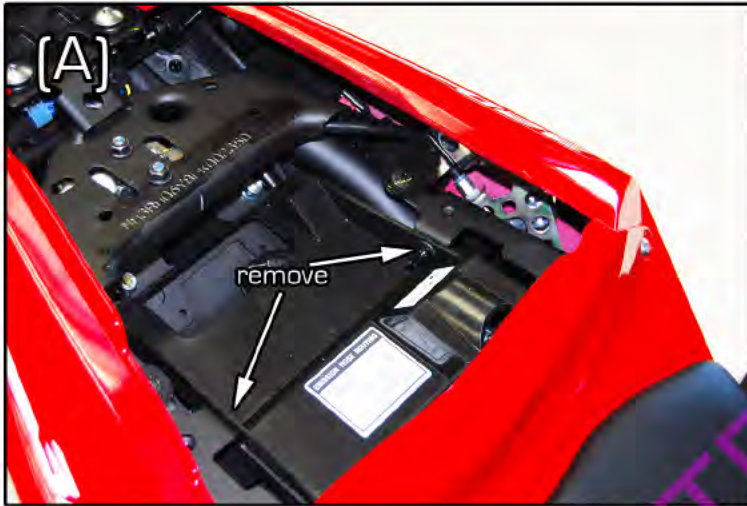

REMOVAL:

- 1) Remove rear seat (use key).
- 2) Remove storage tray (2- plastic rivets). *FIG (A)
- 3) Cut wires to turn signals and license light. *FIG (B)
- 4) Remove rear fender (4- nuts *FIG (B))

INSTALL:

- 1) Adhere License Light to Main Assembly. *FIG (C)
- 2) Secure Turn Signals to Signal Brackets.
- 3) Attach your license plate to Main Assembly using 2- 6x10 Allen Bolts in lower holes backed with washers and nuts.
- 4) Mount Signal Brackets to Main Assembly using 2- 6x12 Allen Bolts in upper holes backed with washers and nuts. *FIG (C)
- 5) Secure Main Assembly to bike using 4- 6x16 Allen Bolts and stock nuts.
- 6) Connect wiring. Use Butt Connectors for License Light and Splice Connectors supplied with Turn Signals. Use Wire Colors chart as a reference.
- 7) Check lighting for proper function.
- 8) Replace storage tray and seat.

WIRE COLORS:

LICENSE LIGHT	RIGHT TURN	LEFT TURN
Black to Black White to Blue	Blk/Wt to Black Black to Green	Blk/Wt to Black Black to Brown

PARTS LIST:

- 1- Main Assembly 1- Pair Turn Signals (S-1123-C)
 1- License Light 2- Signal Brackets 1- Small Grommet
 4- 6x16 Allen Bolts 2- 6x12 Allen Bolts 2- 6x10 Allen Bolts
 4- 6mm Nuts 4- Washers 2- Butt Connectors