
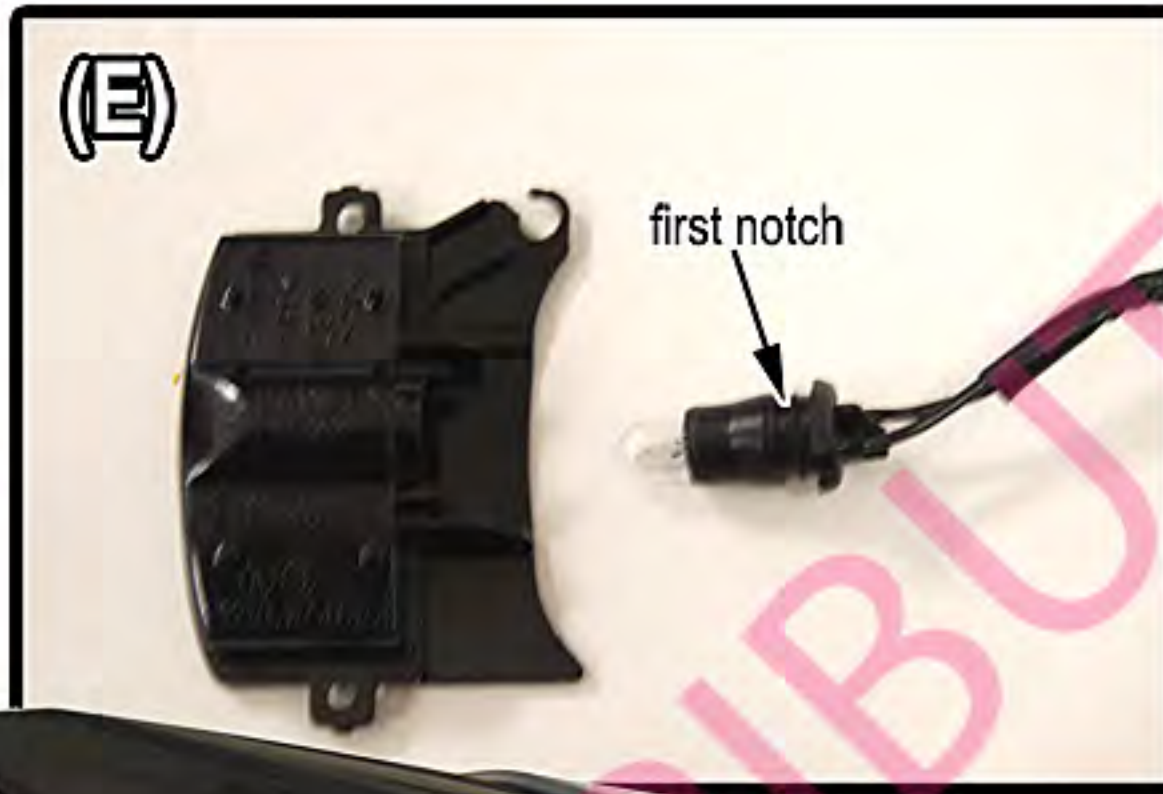
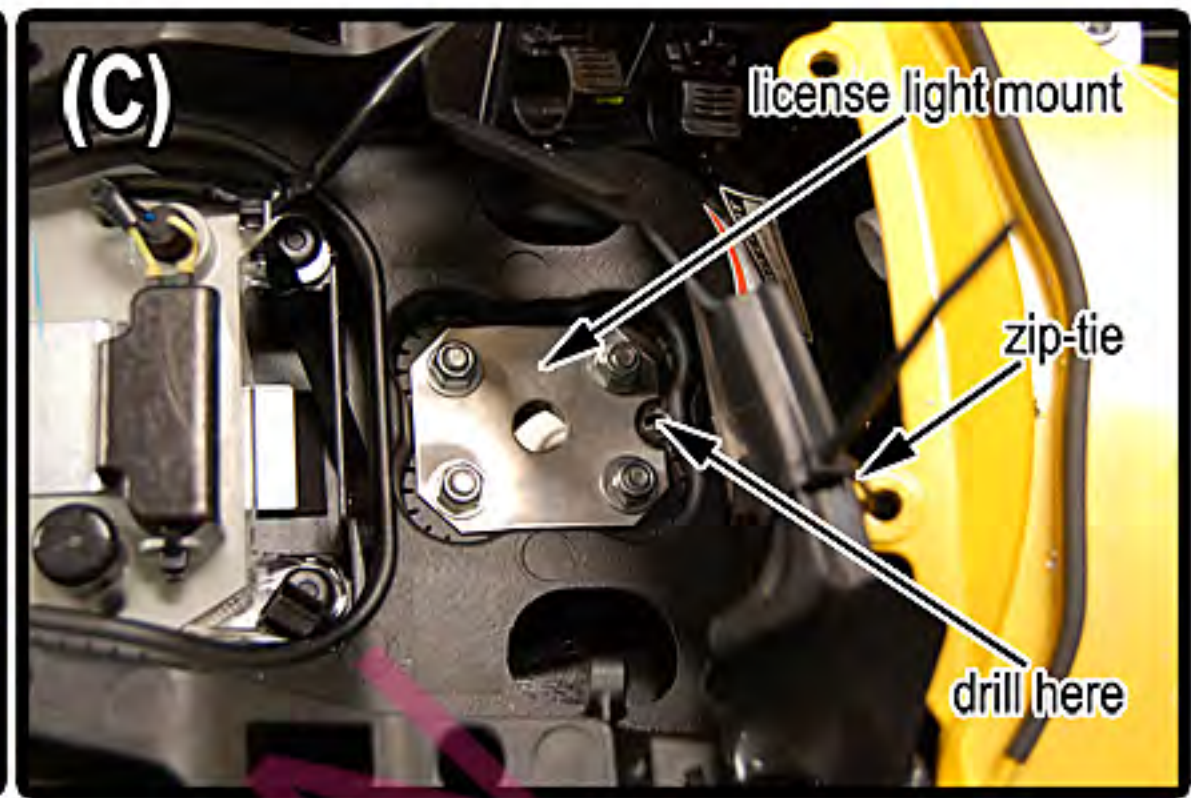


08 YAMAHA YZF600 R6 STANDARD FENDER ELIMINATOR

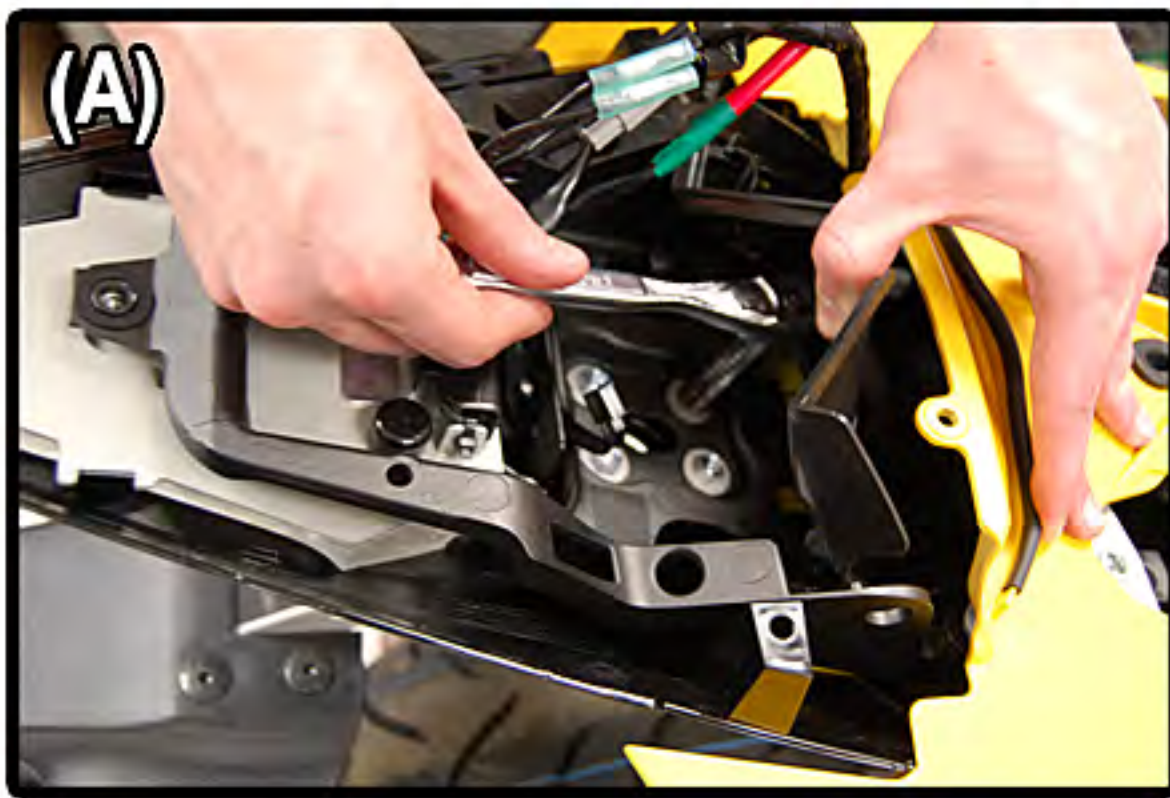

- REMOVE: Rear seat, tool bag, and upper portion of tail section (6 plastic rivets)
- REMOVE: Seat latch arm (unhook cable, 2 bolts, and a clip) *NOTE* Don't lose plastic spacer.
- RELOCATE: Bottom of the storage tray (remove rivet, and roll back.) Hold with zip tie *FIG (C).
- REMOVE: Rear fender (4 bolts, unplug wiring) *FIG (A)
- REMOVE: License light from rear fender *FIG (D).
- REMOVE: Bulb assembly from license light *FIG (E).
- DRILL: 1/4" holes at locations shown in *FIG's (B) & (C).
- MOUNT: Supplied Turn Signals, and Signal Brackets to License Pan *FIG (G).
- MOUNT: License Pan, and Spacer (30mm Allen bolts through subframe, place License Light Mount above) *FIG's (G) & (C).
- CUT: Wire ends off stock signals *FIG (F) and plug in to stock connectors.
- ROUTE: Turn Signal wires up through previously drilled holes and connect using Butt Connectors.
- INSERT: Bulb assembly into License Light Mount.*NOTE* only insert to the first notch.
- CHECK: Lighting for proper function.
- REINSTALL: Seat latch arm, cable, tail section, tool bag, and seat.

- PARTS LIST**
- 1 - license Pan
 - 1 - spacer
 - 1 - license light mount
 - 4 - butt connectors
 - 4 - 30mm Allen bolts
 - 8 - 6mm nuts
 - 8 - washers
 - 2 - 6/12 allen bolts
 - 2 - 6/10 allen bolts
 - 2 - signal brackets
 - 1 - pair signals
 - 2 - small zip-ties

The purchaser releases Competition Werkes inc from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.