
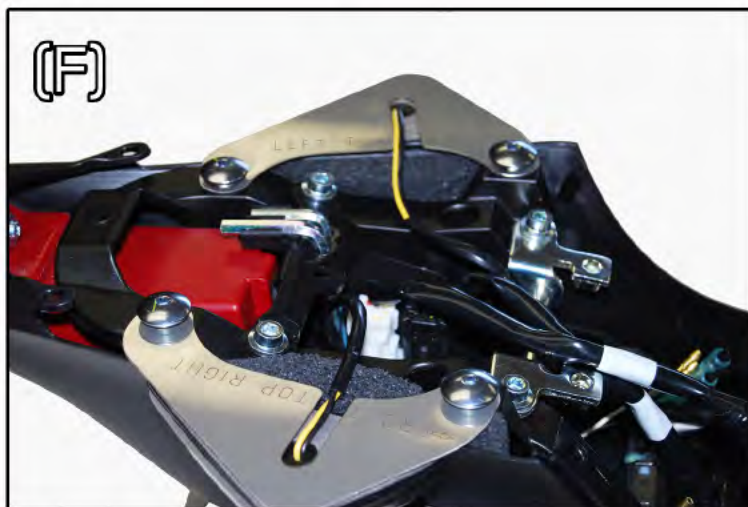
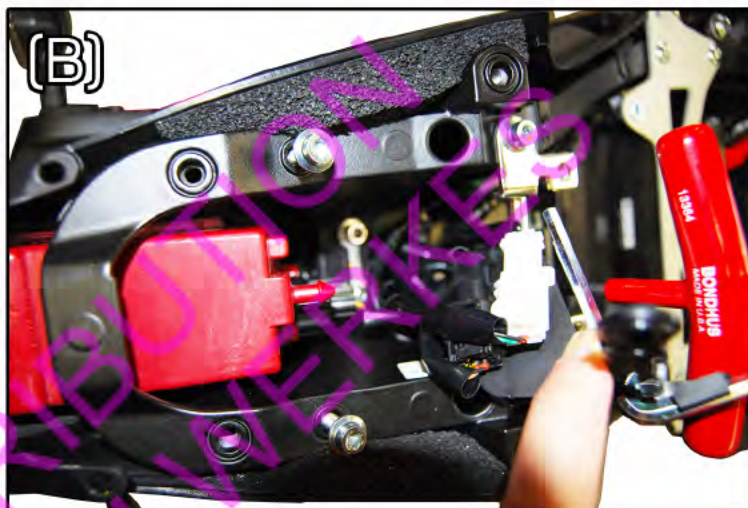


COMPETITION WERKES

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

(800)736-2114

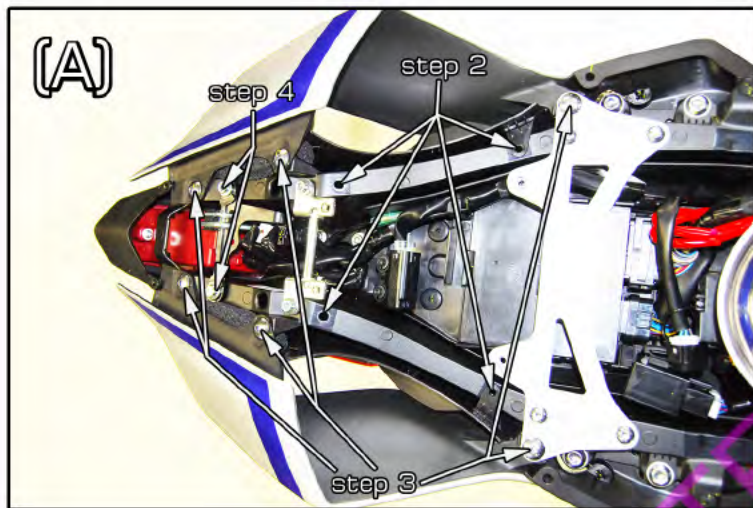

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1Y610

COMPETITION WERKES

PARTS LIST:

1- Main Assembly 2- Signal Brackets 1- Pair of Signals (FD-10S) 1- License Light
4- 6x20 Allen Bolts 4- 6x10 Allen Bolts 8- Washers 8- 6mm Nuts 4- Butt Connectors

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

- REMOVAL:**
- 1) Remove rear seat (use key). Remove front seat (2- allen bolts under corners).
 - 2) Remove center trim (4- plastic rivets). *FIG (A)
 - 3) Remove both sides of tail (6- allen bolts *FIG (A), 2- plastic rivets from under-side). ** Do not lose 4- spacers. **
 - 4) Remove taillight mounting bracket (2- bolts). *FIG (A) ** Position to side. **
 - 5) Remove rear fender (4- bolts in bottom of subframe). *FIG (B)
 - 6) Cut wires at location shown in *FIG (C).
- INSTALL:**
- 1) Adhere License Light to Main Assembly. *FIG D)
 - 2) Secure your license plate to Main Assembly using 4- 6x10 allen bolts with washers and nuts behind.
 - 3) Route wires into subframe and secure Main Assembly using 4- 6x20 allen bolts with washers and nuts above.
 - 4) Adhere Signals to bottom of Signal Brackets. *FIG (E)
 - 5) Using *FIG (F) as a reference, position one side of Signal Bracket and the corresponding side of tail section. Secure both with stock hardware and spacers. Route wires into subframe cavity. Repeat on opposite side.
 - 6) Connect License Light wires directly into stock connectors. Crimp as needed for tight fit. ** See Color Chart **
 - 7) Connect Signals using supplied Butt Connectors. ** See Color Chart **
 - 8) Check lighting for proper function.
 - 9) Replace taillight mounting bracket and center trim using stock hardware.
 - 10) Replace seats



COLOR CHART:

License Light:

Black to Black
Brown to White

Left Signal:

Black to Black
Brown to Yellow

Right Signal

Black to Black
Green to Yellow

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1Y610