

PARTS LIST:

Yamaha XSR900



(800)736-2114

TAILLIGHT COLOR CHART:

CW YAM
 Yellow = Ground = Black
 Red = Brake = Yellow
 Black = Tail = Blue

TURN SIGNAL COLOR CHART



CW YAM
 Blk/Wht = Ground = Black
 Black = Right = Green
 Black = Left = Brown

- 1- Main Assembly 1- Taillight
- 1- Pair Signals (S-1123)
- 2- Signal Brackets 4- 6x16 Allen Bolts
- 2- 6x12 Allen Bolts 2- 6x10 Allen Bolts
- 8- 6mm Nuts 8- 6m Washers
- 2- 3x30 Screws 2- 3mm Nuts
- 2- 3mm Washers 1- Small Zip-tie
- 2- Small Grommets 1- Med. Grommet

***** IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN *****


REMOVAL:

- 1) Remove seat using key.
- 2) Remove seat latch cross bar (4- bolts). *FIG (A)
- 3) Cut wires to turn signals and taillight. Unplug license light (this wire will be abandoned) *FIG (A)
- 4) Remove rear fender assembly (4-nuts) *FIG (B)

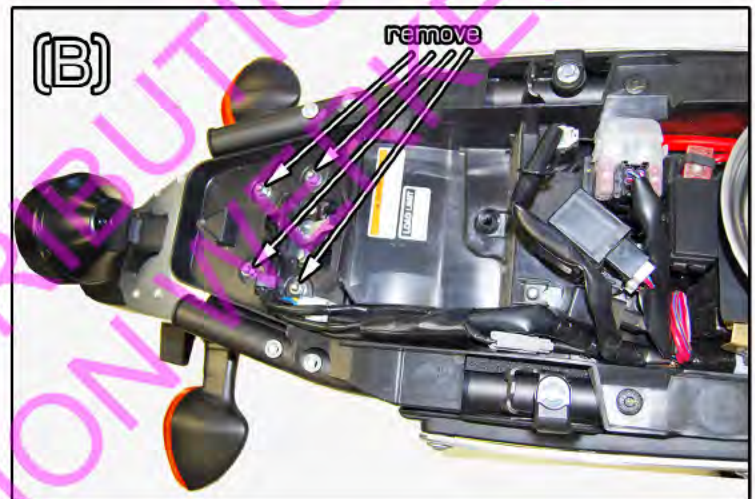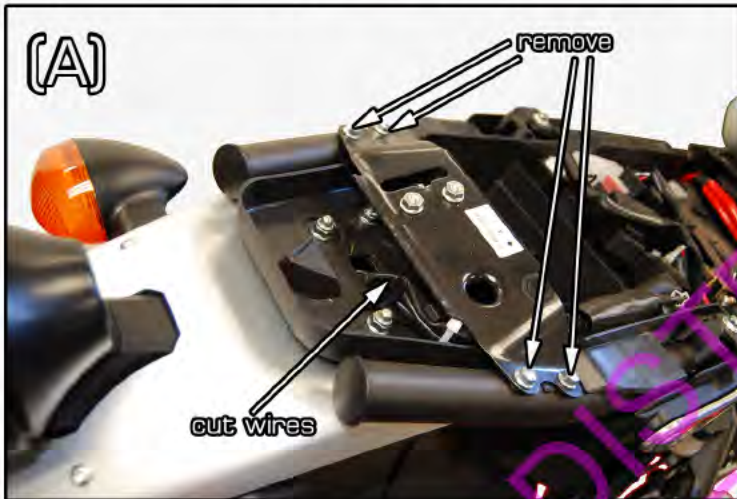

INSTALL:

- 1) Secure supplied Taillight to Main Assembly (2- 3x30 Screws, 2- 3mm washers, 2- 3m nuts).
****NOTE**** Make sure license light is facing down.
- 2) Mount your license plate (2- 6x10 allen bolts in lower holes, backed with washers and nuts). *FIG (C)
- 3) Secure license plate and Signal Brackets (2- 6x12 allen bolts in upper holes). *FIG (C)
- 4) Mount Turn Signals to Signal Brackets. Route wires through small grommets on each side then out medium grommet as seen in *FIG (C).
- 5) Secure Main Assembly to bike (4- 6x16 allen bolts, washers, and nuts). Feed wires into storage.
- 6) Connect wires. (See color chart above) and zip-tie to desired location.
- 7) Check lighting for proper function.
- 8) Replace seat latch cross bar and seat.

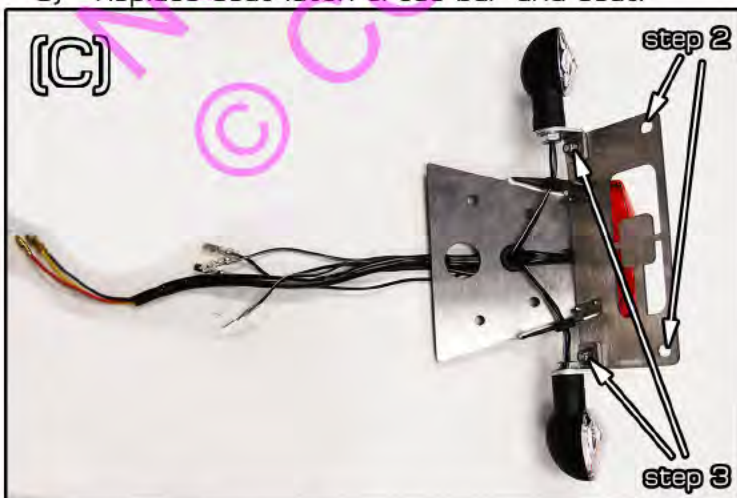

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

1Y901