



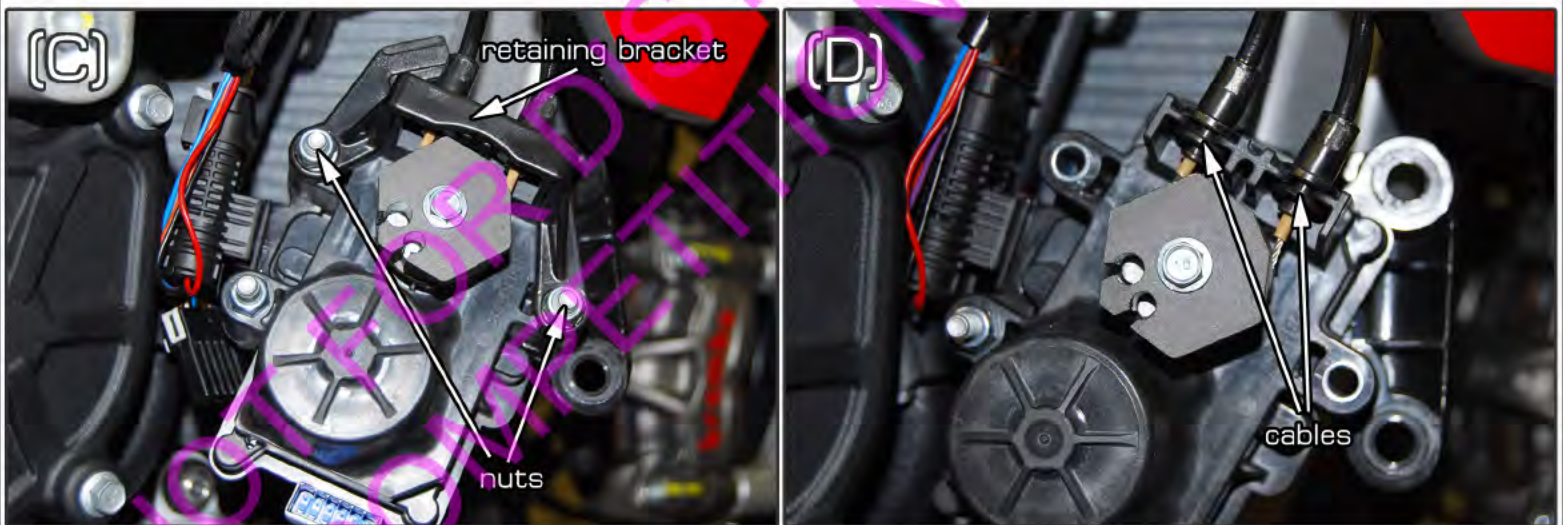

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

APRILIA RSV4/TUONO

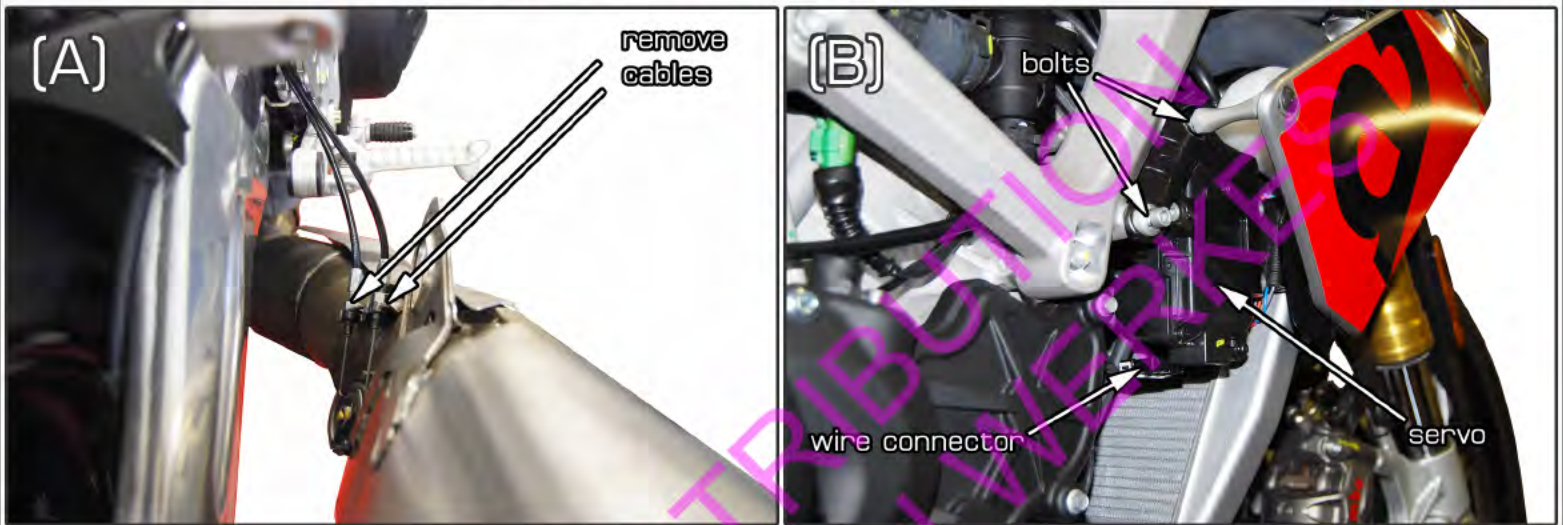

- REMOVAL:
- 1) Remove bolt and loosen clamp on exhaust canister. Slide canister back and roll it outward to expose exhaust valve cables *FIG (A). Remove cables from canister.
 - 2) Locate exhaust valve servo on right side of bike. Unplug the lowest wire connector and remove bolts (RSV4 fairing removal may be required) *FIG (B). Flip servo around to expose the back side.
 - 3) Remove retaining bracket from servo (2- nuts) shown in *FIG (C).
 - 4) Remove cables from servo. *FIG (D) Slide cables out and off rear of bike.
 - 5) *OPTIONAL* Remove passenger footrest brackets from rear subframe (2- bolts per side).

****IMPORTANT**** To insure uniform coloring thoroughly clean with WD-40 or like product before starting motorcycle ****IMPORTANT****

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

PARTS LIST:

1- WerkesUSA GP Race Canister 1- Connector Pipe 1- Exhaust Hanger 1- Mounting Bracket
2- Aluminum Spacers 1- 8x25 Allen Bolts 1- 8x16 Allen Bolt 1- 8mm Nut 4- Washers 1- Spring

- INSTALL:
- 1) Remount retaining bracket to servo (2- nuts).
 - 2) Remount servo (2-bolts) and plug wire connector back in.
 - 3) Replace any fairings which may have been removed (depending on model).
 - 4) Secure supplied Exhaust Hanger to right side of rear subframe using stock bolts with supplied Washers and Aluminum Spacers see photo below*. If you want to retain your passenger pegs install Mounting Bracket to back of rear footrest using supplied 8x16 Allen Bolt into threaded hole available.
 - 5) Position Connector Pipe onto head pipe with stock clamp *leave loose*
 - 6) Install WerkesUSA GP Race Canister onto Collector Pipe. Secure to Exhaust Hanger (or Mounting Bracket) with supplied 8x25 Allen Bolt, 8mm Nut, & Washer.
 - 7) Install Spring between Canister and Collector Pipe. Tighten clamp.
 - 8) Clean exhaust of fingerprints and grime with WD-40 (or similar) before starting.
 - 9) Check hardware and clamp periodically.

NOTE you will have left over parts and hardware do to mounting options.

****IMPORTANT**** To insure uniform coloring thoroughly clean with WD-40 or like product before starting motorcycle ****IMPORTANT****



The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.