

HONDA VFR1200

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

REMOVE: Seat (use key), and right side of tail section (2-allen bolts *FIG [A] and 1- rivet *FIG [B]) *NOTE* push in on center of rivet and pull out on outer ring.



REMOVE: Cable from exhaust valve motor *FIG [C].

LOOSEN; Exhaust clamp under bike *FIG [D].

REMOVE: Stock exhaust canister. Remove bolt *FIG [E] and slide exhaust back and away from bike.

REMOVE: Gasket from exhaust pipe. It should look like *FIG [F] at this point.

MOUNT: WerkesUSA canister using stock bolt and supplied clamp.. *FIG [G].

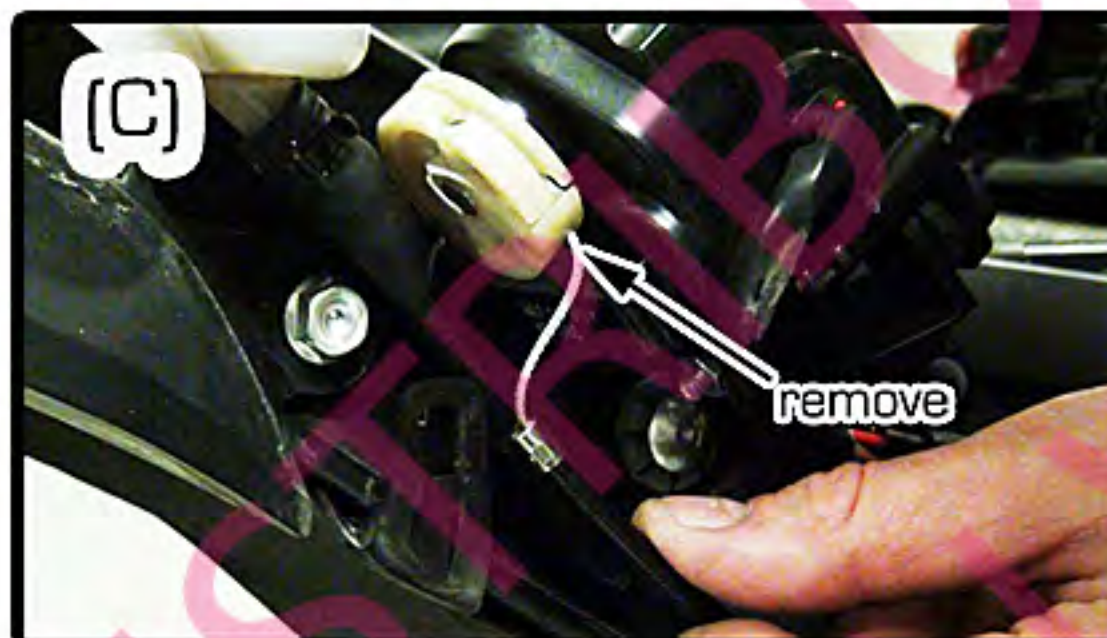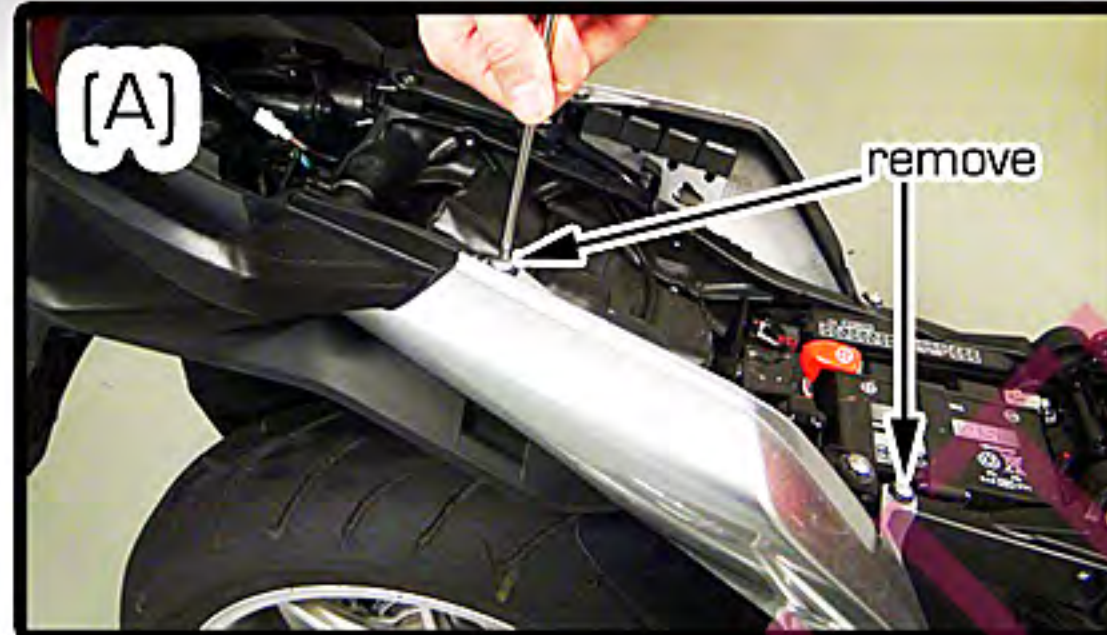

PARTS LIST:

- 1- WerkesUSA Canister
- 1- 1.75" Clamp



****IMPORTANT**** To insure uniform coloring thoroughly clean with WD-40 or like product before starting motorcycle ****IMPORTANT****

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.