





Honda MSX125 "Grom" GP Exhaust

PARTS LIST:

2- 8x20 Allen Bolts 2- 3/8" Washers 1- Exhaust Spring 1- GP Exhaust Canister 1- GP Head Pipe

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

- REMOVE: Heat shield from stock exhaust canister (1- 5mm allen bolt. Then slide forward).
- REMOVE: Stock exhaust canister (2- bolts and a clamp) and top bolt of master cylinder *FIG (D).
- REMOVE: Stock head pipe (2- nuts at head and 1- bolt near rear).
- INSTALL: WerkesUSA Head Pipe (Use 2 stock nuts at head *FIG (A). Use 2 supplied bolts and washers under engine *FIG (B)) use loc-tite. ***NOTE*** Leave loose until after final adjustments.
- INSTALL: WerkesUSA Canister using spring *FIG (C). Secure bracket to master cylinder *FIG (D) use loc-tite.
- ADJUST: Exhaust for proper clearance and tighten all bolts. Clean exhaust with WD-40 before starting.

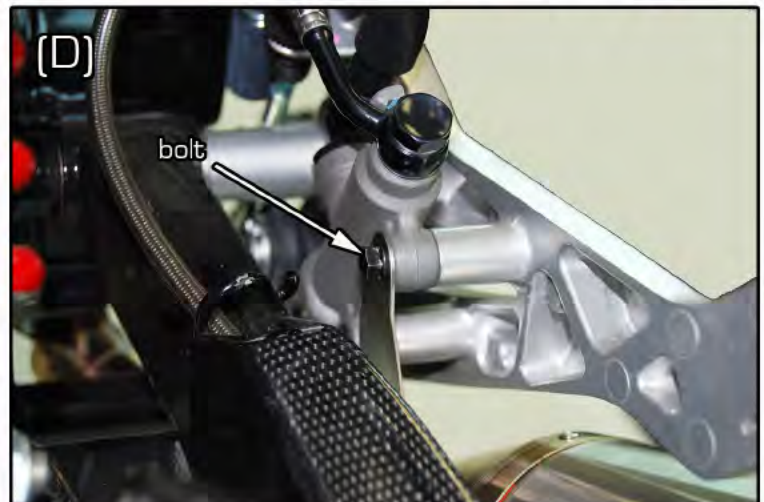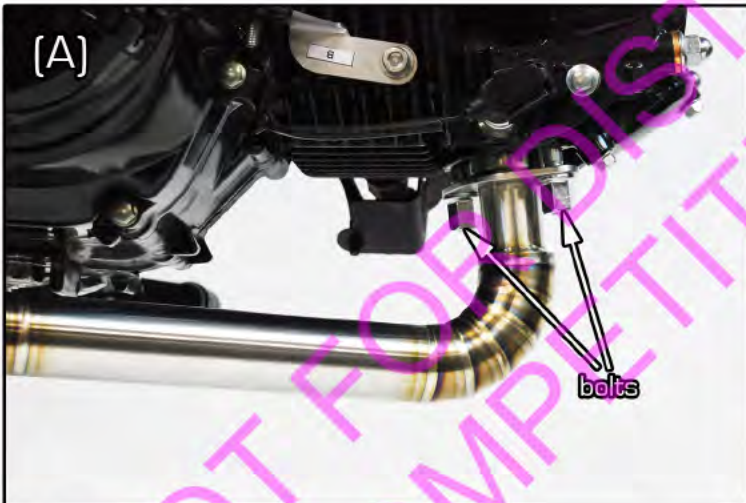

****IMPORTANT**** To insure uniform coloring thoroughly clean with WD-40 or like product before starting motorcycle ****IMPORTANT****

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.