

PARTS LIST:


- 2- Exhaust Canisters
- 1- Y-pipe
- 2- 2" Clamps



<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

(800)736-2114

KTM Super Duke 990

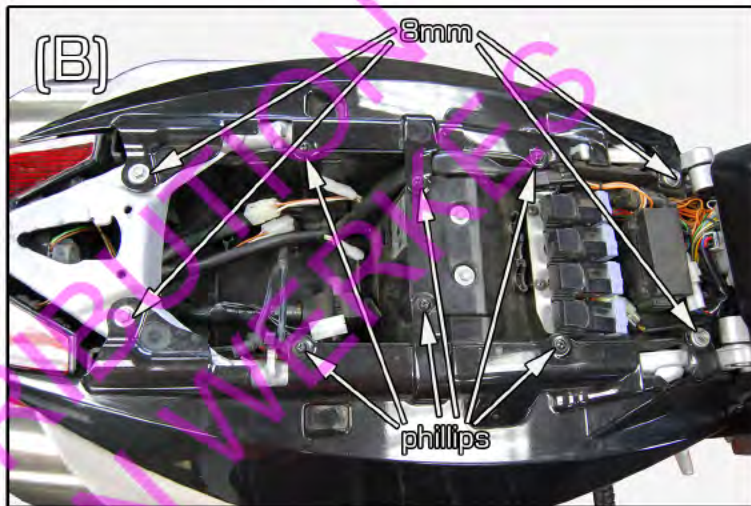

- REMOVAL:**
- 1) Remove seat (use key).
 - 2) Unplug taillight and fender harness located in storage area. *FIG (A)
 - 3) Remove both sides of tail section (4- 8mm hex bolts , 6- phillip screws). *FIG (B)
 - 4) Remove exhaust (1- clamp, 2- 10mm bolts) slide back off aligning pins.

- INSTALL:**
- 1) Assemble right and left Exhaust Canisters to Y-pipe with supplied clamps. *FIG (C) **leave loose**
 - 2) Carefully position exhaust assembly to mid-pipe (use stock clamp) and subframe. **leave loose**
 - 3) Replace tail section, plug in wiring (check for proper function), and replace seat.
 - 4) Align Exhaust Canisters symetrically to bike and tighten clamps. Study *FIG (D).
 - 5) Clean exhaust with WD-40 or similar befor starting.

****IMPORTANT**** To insure uniform coloring thoroughly clean with WD-40 or like product before starting motorcycle ****IMPORTANT****

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

WKT990