

TRIUMPH Daytona 675

<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

REMOVE: Front seat (key on left), Rear seat (allen in front). Tail section (4 allen bolts, unplug wires), Heat shield (4 bolts on top & large bolt for exhaust), Rear fender (4 bolts on side of exhaust, cut zip tie & unplug wires).

REMOVE: Heat shield, & Exhaust canister (loosen clamp, pull down & back)

INSTALL: WerkesUSA exhaust canisters (use stock clamp & bolt)
NOTE make sure to guide provided heat shield inside of the stock heat shield near the clamp.

REPLACE: Tail section and seats.

CLEAN: WerkesUSA canisters with WD-40 or similar product.

NOTE For license plate mounting follow instructions supplied with each option.

NOTE Turn signals are supplied only with WT675-S+/++



WT675-S



WT675-S+ (Standard Fender Eliminator)



WT675-S++ (LTD Fender Eliminator)

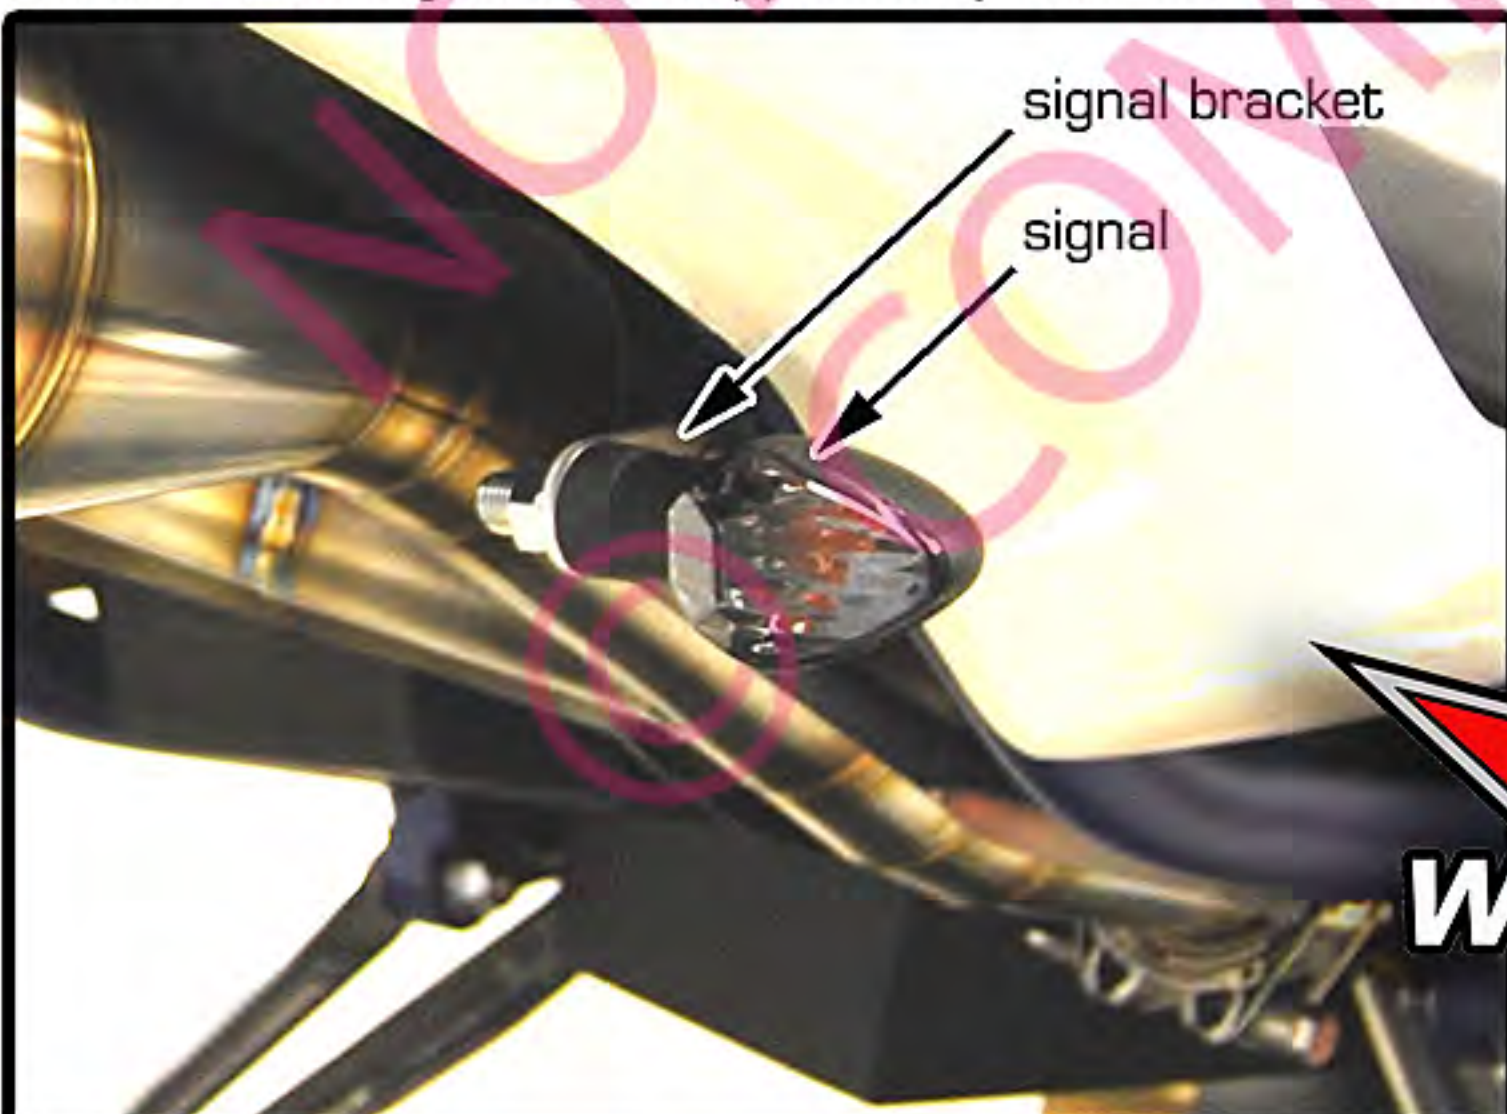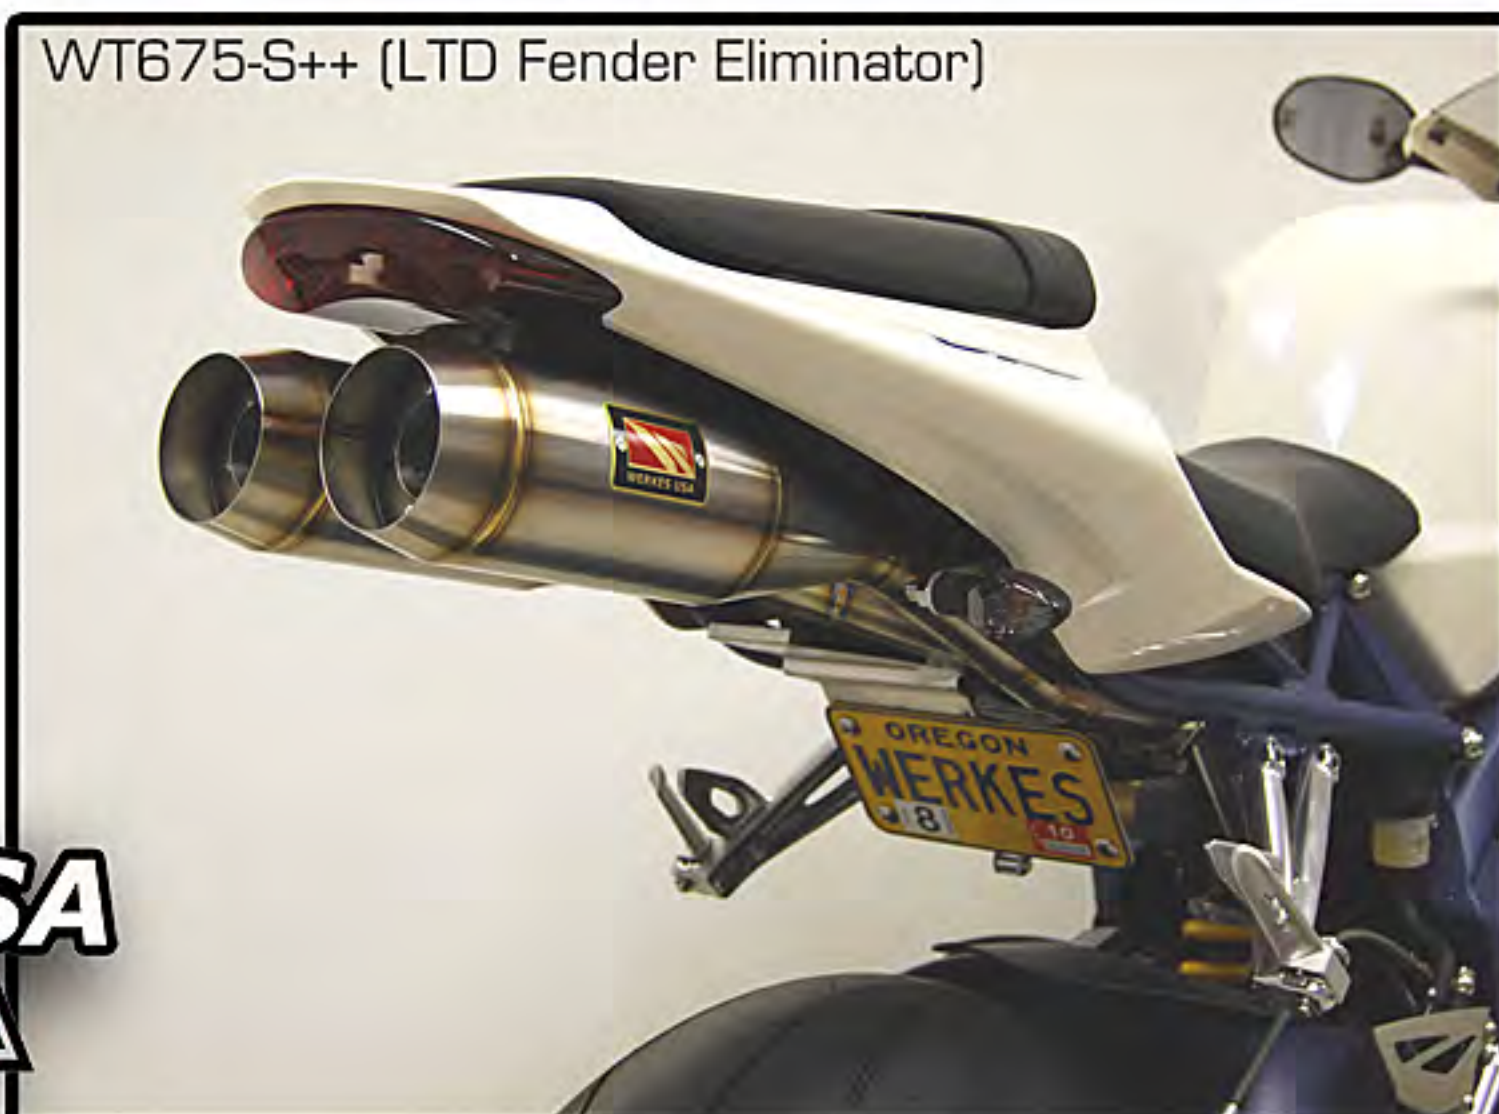

WerkesUSA

****IMPORTANT**** To insure uniform coloring thoroughly clean with WD-40 or like product before starting motorcycle ****IMPORTANT****

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.