

**(800)736-2114**





**REMOVAL:**

- 1) Remove both front and rear seats.
- 2) Remove trim piece between seats (pull up slightly while unscrewing plastic push screws).
- 3) Partially remove exhaust valve motor assembly (1- bolt). \*FIG (A)
- 4) Remove cable cover from exhaust valve motor assembly (2- screws). \*FIG (B)
- 5) Remove the heat shield below the right rearsset (3- allen bolts).
- 6) Loosen cable tension at exhaust\*FIG (C) and remove cables back up at the exhaust valve motor assembly.
- 7) Pull cables through underside of tailsection.
- 8) Remove rearmost exhaust canister (1- bolt, 1-clamp).
- 9) Remove exhaust mounting bracket from rearsset (2- bolts).
- 10) Remove forward exhaust heat shields (2- allen bolts per side).
- 11) Remove both O2 sensors from lower exhaust collector.
- 12) Remove lower exhaust collector (3- bolts, 2- clamps).

**INSTALL:**

- 1) Reinstall cable cover (2- screws) \*FIG (B) and secure exhaust valve assembly (1-bolt)\*FIG (A) \*Leave plugged in.
- 2) Slide two supplied clamps onto supplied "Y" pipe. Position "Y" pipe (O2 bungs up) onto sock head pipes (use stock bolt and supplied 8mm flange nut). \*leave clamps and hardware loose.
- 3) Install both O2 sensors.
- 4) Slip WerkesUSA Canister onto "Y" pipe.
- 5) Secure Canister to rearsset using supplied 8x20 Allen Bolt and Nyloc Nut.
- 6) Install supplied Spring from Canister to "Y" pipe. Tighten clamps and hardware.
- 7) Install both forward heat shields using stock hardware.
- 8) Clean exhaust with WD-40 (or similar) before starting.
- 9) Replace trim piece (4- screws) and both seats.

PARTS LIST:	
1-	GP Race Canister
1-	"Y" Pipe
2-	2.125" Clamps
1-	8x20 Allen Bolt
1-	8mm Nyloc Nut
1-	8mm Flange Nut
1-	Spring

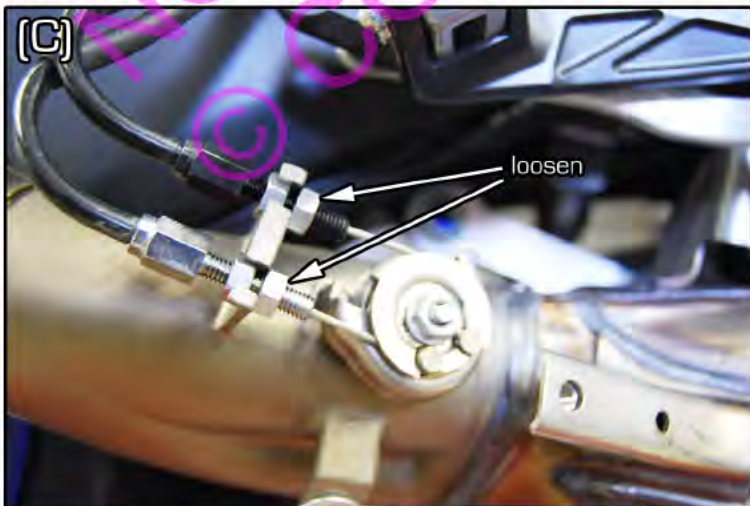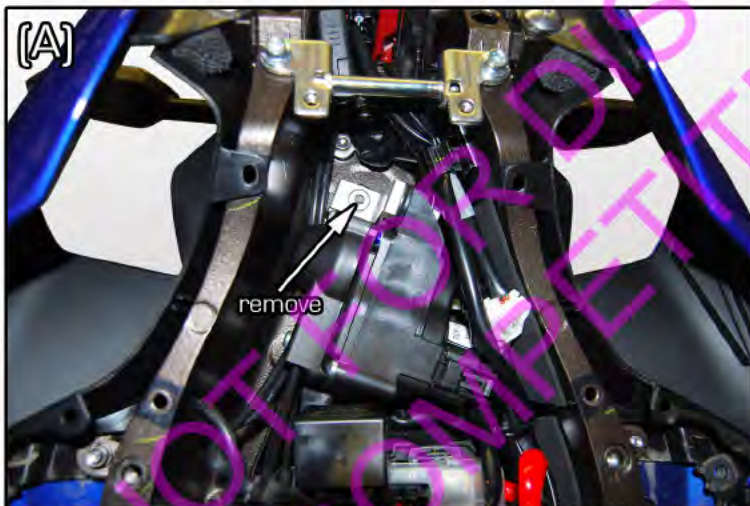

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.