



<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>

(800)736-2114

# Yamaha YZ-R6

## GP Race Slip-on Exhaust

- 1) Remove front seat (2- allen bolts under corners).
- 2) Remove lower fuel tank shrouds (1- bolt per side, carefully slide rearward).
- 3) Unbolt fuel tank at rear and sides (lift and support)
- 4) Remove cross brace under rear of fuel tank.
- 5) Remove heat shield from stock exhaust canister
- 6) Remove Ex-up cables from exhaust.
- 7) Remove exhaust canister.
- 8) Remove Ex-up cable clamp from right side rearset.
- 9) Remove Ex-up cables from cable harness behind rear brake fluid reservoir.
- 10) Remove Ex-up motor (unplug electrical connector and pull motor and cables out the top).
- 11) Remove cable cover from Ex-up motor.
- 12) Remove cables.
- 13) Reinstall Ex-up motor (without cables) into bike and plug in electrical connector.
- 14) Reinstall cross brace under rear of fuel tank.
- 15) Reinstall fuel tank, tank shrouds and front seat.
- 16) Remove lower side panels from both sides.
- 17) Remove exhaust header (O2 sensor, 8- nuts at head, and 2- bolts above muffler).
- 18) Cut muffler off with reciprocating saw (or similar tool) and clean up headpipe with grinder. Study FIG's \*(A) & (B) closely
- 19) Reinstall headpipes. Secure with stock nuts.
- 20) Install Y-Pipe (spring hook up) with supplied clamps **\*\*leave loose\*\***.
- 21) Install WerkesUSA GP Race Canister. **\*\*Note: lower mount on frame will need to be loosened for bracket clearance, rearset may also be loosened if needed.\*\*** Attach Canister to Y-Pipe with supplied Spring. Use a stock bolt at lower mount with supplied Washer and Nut. Use the stock bolt at rearset mount with supplied Washer and Nut \*FIG (C). Tighten ALL mounts, mounting points, and clamps securely. Reinstall O2 sensor.
- 22) Clean entire exhaust with WD-40 or similar.
- 23) Reinstall lower side panels.

### PARTS LIST:

1- GP Race Canister    1- Y Pipe    2- 2.25" Clamps    1- Spring    2- 8mm Washers    2- 8mm Nuts

**\*\*IMPORTANT\*\*** To insure uniform coloring thoroughly clean with WD-40 or like product before starting motorcycle **\*\*IMPORTANT\*\***

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

WY610R




<<<<<< IT IS RECOMMENDED THAT THIS PRODUCT BE INSTALLED BY A QUALIFIED TECHNICIAN >>>>>>

(800)736-2114

# Yamaha YZ-R-6

## GP Race Slip-on Exhaust

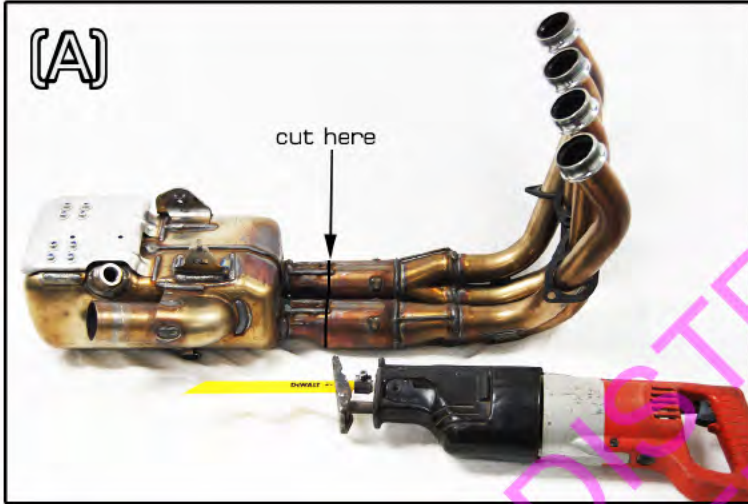

**\*\*IMPORTANT\*\*** To insure uniform coloring thoroughly clean with WD-40 or like product before starting motorcycle **\*\*IMPORTANT\*\***

The purchaser releases Competition Werkes Inc. from all liabilities pertaining to the installation and use of purchased parts. Purchaser recognizes that any alteration and/or modifications to the vehicle may increase the risk of injury or accident, and may also render the vehicle illegal for use on public roads.

WY610R