


## Football Helmet Cart ASSEMBLY INSTRUCTIONS

## **BOX CONTENTS**

## **Description** Quantity · Hardware bag 1 each A U-shaped end top bars 2 each End uprights with pre-drilled holes 8 each Cl 29<sup>1/4</sup>" length shelf bars with push buttons 20 each C2 29<sup>½</sup>" length shelf bars with hole for push button 20 each 201/2" length end bars w/ pre-drilled holes & center hole 4 each 201/2" length end bars w/ two (2) pre-drilled holes 6 each Cross brace with 4 wing nuts 1 each

## **HARDWARE BAG CONTENTS**

Description		Quantity
а	Screws w/ lock washers	60 each
b	Black plastic end spacers	60 each
С	Wing Nuts	4 each
G1	Caster wheels	2 each
G2	Locking caster wheels	2 each

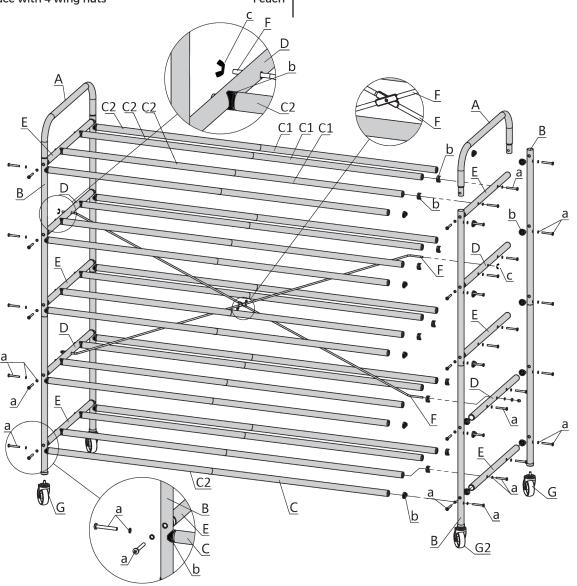

STEP 1

Unpack all parts and organize with like pieces from the parts list. This will help locate pieces easier.





Start with the 20, 29<sup>½</sup>" shelf bars with push button and 20, 29 ½" shelf bars with hole for push button. Join 1 each bar with push button to 1 each bar with push hole. Repeat for all shelf bars to create 20 shelf bars.



Assemble end uprights using U-shaped top bar and attaching two (2) end upright bars with pre-drilled holes on one side and two (2) end uprights with pre-drilled holes on the opposite side.



Locate the 3, 2012" length end bars with pre-drilled holes and 2 each  $20^{\frac{1}{2}}$  length end bars with pre-drilled holes and pre-drilled center hole. Assemble each horizontal end bar between the assembled upright bars with U-shaped bar on the top. Attach using black plastic spacers and screws with lock nuts. The horizontal end bars with the pre-drilled center holes will be attached on row two (2) and row four (4). DO NOT TIGHTEN SCREWS! Leave slightly loose to aide in further assembly.



Repeat Step 4 for opposite end uprights. Refer to above photo for how end section will look once assembled.



Attach caster wheel to bottom of assembled uprights. Each locking caster wheel will be attached to one upright and each regular caster wheels will be attached to opposite upright.



Attach shelf bars by starting at the bottom of each upright and attaching four (4) shelf bars per row using black plastic spacers and screws with lock washers. DO NOT TIGHTEN THE SCREWS! Leave slightly loose until all bars are attached.



Attach center cross bar to rows two (2) and four (4) on each end pre-drilled center hole using wing nuts provided. Take note that it is easier to attach if all screws on shelf bars were left loose as noted in Step 7.



Now that all parts are assembled go back and tighten all screws used in assemble. Be sure wing nuts on cross bars are tightened and the helmet cart is sturdy.

Warning: This helmet cart is designed to hold the weight of football helmets only. Do not use the helmet cart for anything other than its intended us. Do not ride on the helmet cart as it will cause the helmet cart to break.

For any questions on assembly or to order other great Trigon Sports Products please call 888-313-1303 or visit us on the web at www.trigonsports.com

