


## 08 - Electrical / 8A - Audio/Video/Entertainment/Connectivity / ANTENNA, Satellite, Audio / Removal and Installation


### REMOVAL AND INSTALLATION

#### REMOVAL


1. Disconnect and isolate the negative battery cable(s) ([Refer to 08 - Electrical/Battery System/Standard Procedure](#)).
2. Remove the sport bar speaker pod assembly ([Refer to 23 - Body/Interior/BAR, Roll/Removal and Installation](#)).
3. Disconnect the wire harness connector (1).

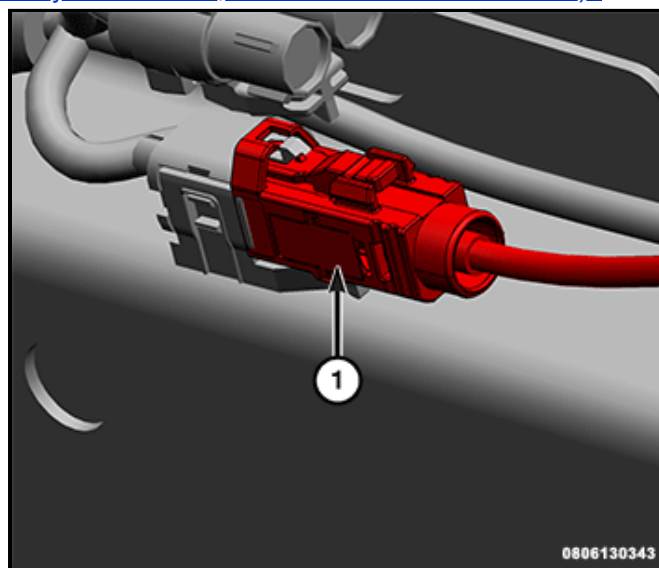

4. Remove the antenna mounting retainer (1).

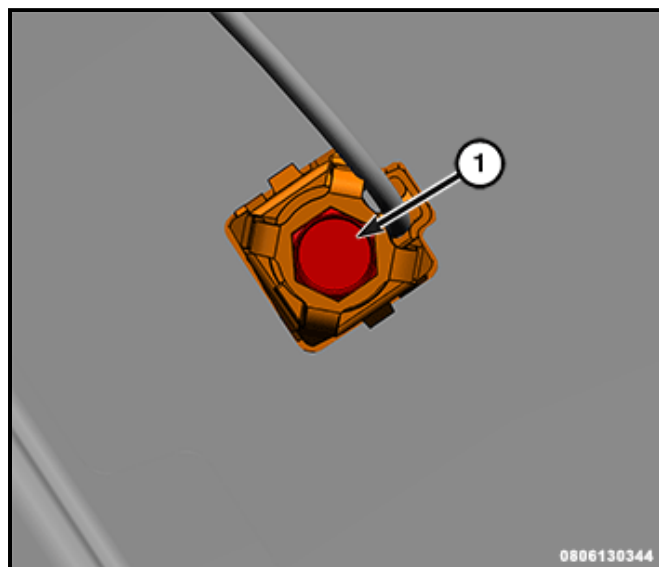

5. From inside the vehicle, using a flat bladed tool, press one of the two plastic retaining tabs on the antenna stud. Push up on one side of the antenna stud, press the other plastic retaining tab and remove the antenna from the sport bar.

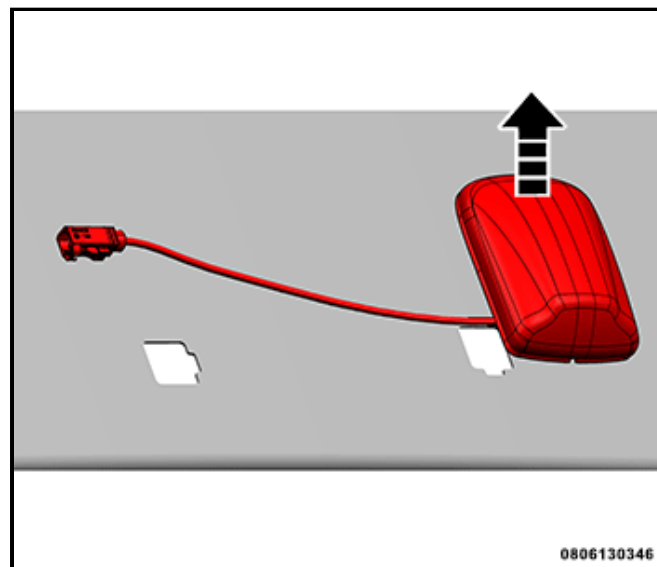

## INSTALLATION

**NOTE:** A new silver clip (with four legs) must be used if the same antenna is being re-installed.

1. Insert the wire harness through the hole in sport bar. Press the antenna into position until both retainers on the antenna stud and the locator stud engage into position in the sport bar.
2. Install the antenna mounting fastener and tighten securely.
3. Connect the antenna connector.
4. Install the sport bar speaker pod assembly ([Refer to 23 - Body/Interior/BAR, Roll/Removal and Installation](#)).
5. Connect the negative battery cable(s) ([Refer to 08 - Electrical/Battery System/Standard Procedure](#)).