



HUNTING BEAST GEAR

P.O. Box 139 Lannon, WI 53046 Phone: (262) 293-6412

www.huntingbeastgear.com

HUNTING BEAST GEAR CLIMBING STICK ATTACHMENT ROD ASSEMBLY

Male Lobbed Knob

Female Lobbed Knob



5/16-18
Nickel Plated
Steel Threaded Rod

2.5" X 9" Stealth Strip

Parts

1. Male Lobbed Knob
2. Female Lobbed Knob
3. 5/16-18 Nickel Plated Rod
4. 2.5" X 9" Stealth Strip

Instructions

1. Measure your required stealth stripping length based on the length of the attachment rod you purchased.
2. Leave $\frac{3}{4}$ to 1 inch of threads exposed on rod to receive the female lobbed knob or female insert on the treestand.
3. Once cut to length, peel the protective backing off the stealth stripping.
4. Carefully apply the stealth stripping to the threaded rod in a rolling manner until the full 2.5 inches of stealth stripping is rolled onto the attachment rod.

FAILURE TO FOLLOW THESE INSTRUCTIONS COULD CAUSE SERIOUS INJURY OR DEATH. ALWAYS WEAR APPROVED FALL ARREST SYSTEM WHEN USING ANY TREE STAND THAT MEETS THE REQUIREMENTS OF TEST METHOD F2337.

IF YOU DO NOT UNDERSTAND ANY OF THESE INSTRUCTIONS,

CALL CUSTOMER SERVICE: (262) 293-6412 OR VISIT OUR WEB SITE: WWW.HUNTINGBEASTGEAR.COM



HUNTING BEAST GEAR


P.O. Box 139 Lannon, WI 53046 Phone: (262) 293-6412

www.huntingbeastgear.com

HUNTING BEAST GEAR CLIMBING STICK ATTACHMENT ROD ASSEMBLY


1. Securing the Beast Gear Climbing Sticks together with the Beast Gear Climbing Stick Attachment Rod

- a. The Beast Gear Climbing Sticks can be stacked vertically and secured together by sliding the attachment rod through the Beast Gear Climbing Stick weight reduction holes. The second hole below the Beast Button is the optimum position for securing the sticks together and securing the sticks to the stand. The female lobbed knob can be tightened onto the attachment rod to secure the sticks together.



2. Securing the Beast Gear Climbing Sticks to the Beast Gear Hang-On Treestand

- a. The Beast Gear Climbing Sticks can be stacked vertically and aligned against the Beast Gear Hang-On Treestand antler bracket while the Beast Gear Hang-On Treestand is in the folded position. Align the threaded insert on the Beast Gear Hang-On Treestand seat post with the Beast Gear Climbing Stick weight reduction hole, the second hole from the Beast Gear Button, see diagram below. This will allow you to slide the Beast Gear Climbing Stick Attachment Rod through the Beast Gear Climbing Sticks and screw into the threaded insert on the Beast Gear Hang-On Treestand.

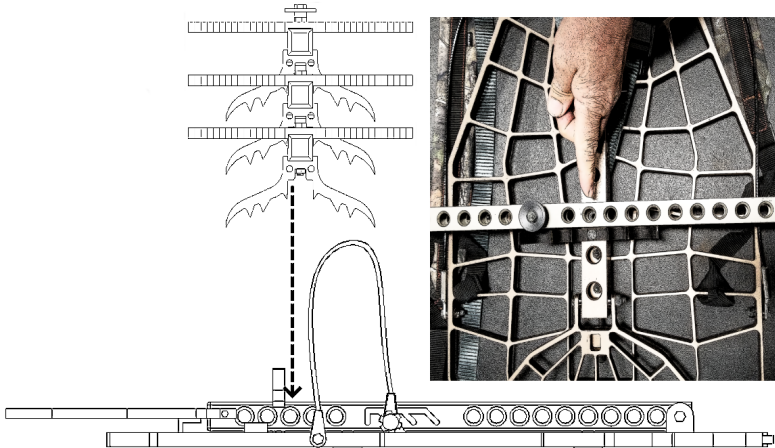

FAILURE TO FOLLOW THESE INSTRUCTIONS COULD CAUSE SERIOUS INJURY OR DEATH. ALWAYS WEAR APPROVED FALL ARREST SYSTEM WHEN USING ANY TREE STAND THAT MEETS THE REQUIREMENTS OF TEST METHOD F2337.

IF YOU DO NOT UNDERSTAND ANY OF THESE INSTRUCTIONS,

CALL CUSTOMER SERVICE: (262) 293-6412 OR VISIT OUR WEB SITE: WWW.HUNTINGBEASTGEAR.COM