

GRIPPS®

ANSI/ISEA
121-2018
COMPLIANT

H01058 DUAL ARM TOOL-HITCH 32KG/71LB

The GRIPPS® Dual Arm Tool-Hitch is suitable for heavy tools weighing up to 32.0kg / 71.0lb, such as crowbars and sledgehammers.



The GRIPPS® Dual Arm Tool-Hitch loops through itself to create a simple yet strong choke.

The tool is then tethered directly to a load-rated anchor point via the heavy-duty tool ring on the tail.

71_{LB}

32_{KG}

MAX LOAD:

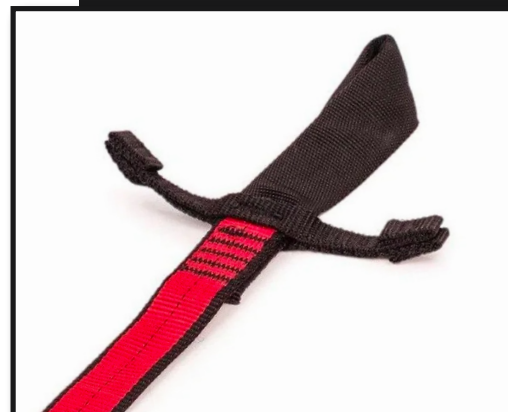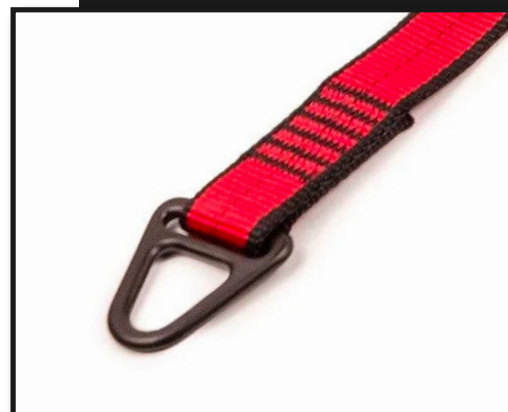

THE LEADER IN FALLING OBJECT PREVENTION

GRIPPS.COM

KEY FEATURES

Creates a load-rated tool connection point for heavy 'open' tools.

Tactical grade Nylon for maximum strength.


Heavy-duty closed metal D-Ring



SPECIFICATIONS


SKU	MAX LOAD	MAX TETHER LENGTH
H01058	32KG 71LB	1.8M 71IN

1




Lay out Tool-Hitch flat on ground or a table.

2




Pass one end of the Tool-Hitch around the neck (near the tool's center of gravity). Then pass the D-Ring end back through the Tool Hitch loop to create a choke-hold.

3




Apply GRIPPS® V-Gripp Tape to straps/wings of the Tool-Hitch. Wrap around 10x times on either side.

4



Test tape effectiveness and pull on Tool-Hitch to test strength.

5

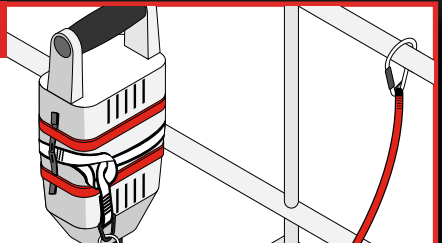

Your Tool-Hitch is ready to tether to a suitable anchor point using an appropriate Tool Tether.

@GRIPPSGLOBAL



#ConquerGravity