

GRIPPS®

GRIPPS Technical Specification Sheet:

GRIPPS® Dual Arm Tool-Hitch 32kg/71lb
Models: H01058



H01058
Dual Arm Tool-Hitch
Max Load: 32.0kg | 71.0lbs
Max Teher Length: 1.8m | 71in
ANSI/ISEA 121-2018 COMPLIANT

FOR PRODUCT SUPPORT CONTACT:

support@gripps.com | +61 3 8383 9458

WWW.GRIPPS.COM

GRIPPS® Dual Arm Tool-Hitch 32kg/71lb

SAFETY INFORMATION

⚠️ WARNING Before using the GRIPPS® Heavy Duty Tool-Hitch, read all provided safety information pertaining to the use of your Dropped Tool Prevention (DTP) device. **FAILURE TO DO SO COULD RESULT IN INJURY OR DEATH.**

The user of a DTP device bears the responsibility of reading all safety information contained herein. Keep this manual for future reference.

Intended Use:

When used properly, the GRIPPS® Heavy Duty Tool-Hitch can prevent workplace hazards resulting from dropped tools. These may include personal injury and material damage.

GRIPPS® does not approve use of this device for any activities not described in the User Instructions. This device is not intended to be used in any recreational activity, as a personal fall-arrest device or in any other manner not described herein.

⚠️ WARNING Misuse of this device could result in serious injury or death.

Adhere to all manufacturer recommendations regarding the operation and maintenance of this device. For additional information, contact GRIPPS® customer support.

Read and adhere to the following in order to ensure correct operational functionality:

- Your DTP should never be used as a personal fall-arrest device or restraint system.
- Do not use this device with tools that exceed the specified maximum load/weight.
- A DTP device used in applications that exceed the limits of operation specified by the manufacturer should be considered unsafe and should be replaced.
- Do not tether a tool over 2.5kg/5.5lbs directly to your clothing or person.
- Inspect your DTP device before each use.
- Ensure the DTP device is securely connected to a load rated tool connector or anchor point before use.
- Inspect any tool connector point before it is connected to the DTP device.
- Modification of the DTP device voids all warranties and violates manufacturer recommendations.
- Do not use a tool that cannot be connected to your DTP in the manner specified by GRIPPS®.
- It is unsafe to extend the length of the DTP product by any means.
- Do not use this product if it will create an unsafe working environment.
- Use extra precaution around moving machinery, moving parts, electrical hazards, extreme temperatures, chemical hazards, or combustion hazards.
- Avoid contact between the Heavy Duty Tool-Hitch and rough or sharp edges.
- All connected tools and equipment, including connection points,

- must be compatible for use with this DTP device.
- Always wear appropriate personal protective equipment.
- If a tether has arrested a dropped tool or object, it should be taken out of service and replaced.
- All procedures shown in this instruction are for GRIPPS® Tool Hitch products only.

GENERAL USE AND CARE

GRIPPS® Tool-Hitches are designed to be used with tools that have no suitable tool connector point and are typically heavy, such as power tools, sledge hammers or crow bars. GRIPPS® Tool-Hitches are compatible with the GRIPPS® Tool Tether range.


Recommended Use of GRIPPS® Heavy Duty Tool-Hitch:

1. Use H01058 Dual Arm Tool-Hitch on tools that weigh up to 36kg/79lbs.
2. Only secure arms on Tool-Hitches with GRIPPS® V-Gripp Tape.
3. Only use in combination with GRIPPS® Tool Tethers.


Before Use:

Thoroughly inspect your GRIPPS® DTP device before each use. Do not use any component that presents deformities or deterioration. Before use: Thoroughly clean tool of any soiling and grease prior to application


HOW TO USE / INSTRUCTIONS:

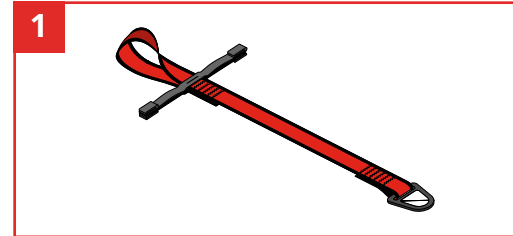


Lay out Tool-Hitch flat on ground or a table.

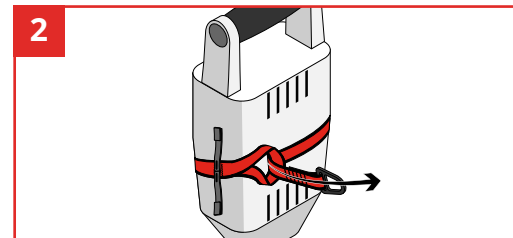


Pass one end of the Tool-Hitch around the neck (near the tool's center of gravity). Then pass the D-Ring end back through the Tool-Hitch loop to create a choke-hold.

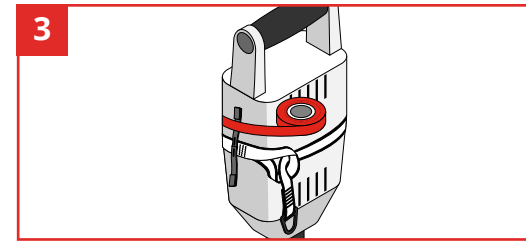

Apply GRIPPS® V-Gripp Tape to straps/wings of the Tool-Hitch. Wrap around 10x times on either side.

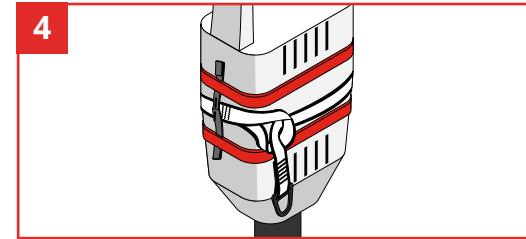

Test tape effectiveness and pull on Tool-Hitch to test strength.

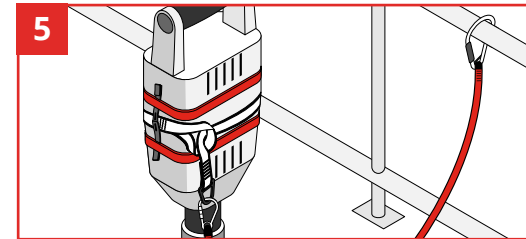

Your Tool-Hitch is ready to tether to a suitable anchor point using an appropriate Tool Tether.

After Use Care:

Clean and inspect the Heavy Duty Tool-Hitch and any connected tethers. For tougher stains, use warm water and a mild soap or detergent. Do not use again until dry.

Store in a clean and dry environment. Proper care will help to ensure that it will operate effectively and extend its service.

GRIPPS®



linkedin.com/company/grippsglobal



facebook.com/gripps1993



youtube.com/@gripps3480grippsglobal



instagram.com/grippsglobal