

GRIPPS®

GRIPPS Technical Specification Sheet:

GRIPPS® Scaffold Tube Lifting Bag Models: H01101



H01101
Scaffold Tube Lifting Bag
Max Load: 45kg | 99lbs

FOR PRODUCT SUPPORT CONTACT:

support@gripps.com | +61 3 8383 9458

WWW.GRIPPS.COM

GRIPPS® Scaffold Tube Lifting Bag

SAFETY INFORMATION

⚠️ WARNING Before using the GRIPPS® Scaffold Tube Lifting Bag, read all provided safety information pertaining to the use of your Dropped Tool Prevention (DTP) device. **FAILURE TO DO SO COULD RESULT IN INJURY OR DEATH.**

The user of a DTP device bears the responsibility of reading all safety information contained herein. Keep this manual for future reference.

Intended Use:

When used properly, the GRIPPS® Scaffold Tube Lifting Bag can prevent workplace hazards resulting from dropped tools. These may include personal injury and material damage.

GRIPPS® does not approve use of this device for any activities not described in the User Instructions. This device is not intended to be used in any recreational activity, as a personal fall-arrest device or in any other manner not described herein.

⚠️ WARNING Misuse of this device could result in serious injury or death.

Adhere to all manufacturer recommendations regarding the operation and maintenance of this device. For additional information, contact GRIPPS® customer support.

Read and adhere to the following in order to ensure correct operational functionality:

- Your DTP should never be used as a personal fall-arrest device or restraint system.
- Do not use this device with tools that exceed the specified maximum load/weight.
- A DTP device used in applications that exceed the limits of operation specified by the manufacturer should be considered unsafe and should be replaced.
- Do not tether a tool over 2.5kg/5.5lbs directly to your clothing or person.
- Inspect your DTP device before each use.
- Ensure the DTP device is securely connected to a load rated tool connector or anchor point before use.
- Inspect any tool connector point before it is connected to the DTP device.
- Modification of the DTP device voids all warranties and violates manufacturer recommendations.
- Do not use a tool that cannot be connected to your DTP in the manner specified by GRIPPS®.
- It is unsafe to extend the length of the DTP product by any means.
- Do not use this product if it will create an unsafe working environment.
- Use extra precaution around moving machinery, moving parts, electrical hazards, extreme temperatures, chemical hazards, or combustion hazards.
- Avoid contact between any connected tethers and rough or sharp edges.
- All connected tools and equipment, including connection points, must be compatible for use with this DTP device.
- Always wear appropriate personal protective equipment.

- If a tether has arrested a dropped tool or object, it should be taken out of service and replaced.
- All procedures shown in this instruction are for GRIPPS® Scaffold Tube Lifting Bag products only.

GENERAL USE AND CARE

Safely lift, transport & store multiple scaffold tubes of up to 1.8m/71" in length with the GRIPPS® Scaffold Tube Lifting Bag, and create a safer and more efficient job site.

A Hypalon reinforced base on the bottom resists punctures, and the fully sealable enclosure at the top ensures that all contents of the bag stay safe and secure at all times.

Recommended Use of GRIPPS® Scaffold Tube Lifting Bag:

1. Only lift bags from labeled lifting straps. The load rated lifting point will be clearly identified on the lifting strap.
2. The specified Max Load rating is only applicable to the lifting straps. If the GRIPPS® Lifting Bag contains D-Rings, the load rating for the D-Rings is 2.5kg/5.5lbs.
3. Always secure contents against spills by closing the lid on the bag (where available) prior to lifting.
4. Always check for damage or frayed stitching prior to lifting.


Before Use:

Thoroughly inspect your GRIPPS® DTP device before each use. Do not use any component that presents deformities or deterioration.


Recommended Use of GRIPPS® Scaffold Tube Lifting Bag:

1. Lifting equipment is to be stored in a dedicated storage area, and be protected from damage at all times.
2. A licensed personnel must inspect all relevant equipment prior to their use.
3. A licensed personnel must inspect all relevant equipment after any incident which may have caused damage.
4. A licensed personnel must maintain all GRIPPS® lifting equipment stored and/or used on site in accordance with the manufacturer's recommendations, and relevant regional standards.
5. Lifting equipment is to be inspected by a licensed personnel at intervals not exceeding three (3) months.
6. A documented annual inspection and 'Fitness for Use' review is to be undertaken on all GRIPPS® lifting equipment by a competent person (IE. Lifting Equipment Specialist).
7. A Lifting Equipment Register is to be maintained which is to include the identification, inspection and maintenance details records for all lifting equipment components. This will be organized by the relevant asset owner for each site.
8. Details of 3 monthly and annual inspections are to be recorded in the site's Lifting Equipment Register by the Lifting Equipment Specialist.
9. A tag is to be fitted to all lifting equipment by the Lifting Equipment Specialist that clearly identifies the item's fitness for use.

HOW TO USE / INSTRUCTIONS:

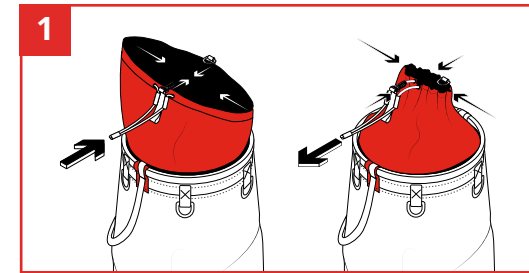

To secure contents inside the Scaffold Tube Lifting Bag, pull the drawstring tight.

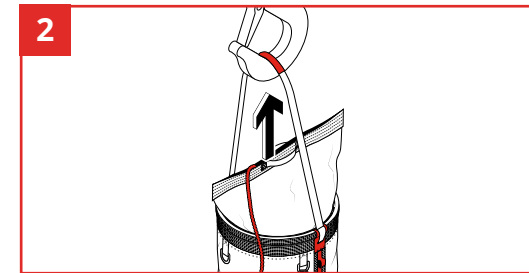

Only lift from the clearly identified load-rated lifting point on the straps, and ensure tools are tethered to the D-Rings at all times. Do not lift from carabiner.

* NEVER EXCEED MAX LOAD *

After Use Care:

Clean and inspect the lifting bag and any connected tethers. For tougher stains, use warm water and a mild soap or detergent. Do not use again until dry.

Store in a clean and dry environment. Proper care will help to ensure that it will operate effectively and extend its service.

GRIPPS®



linkedin.com/company/grippsglobal



facebook.com/grippsglobal



youtube.com/@gripps3480grippsglobal



instagram.com/grippsglobal