

GRIPPS®

GRIPPS® Technical Specification Sheet.

GRIPPS® Cable Retractor Unit Models: H01120, H01125



H01120
Steel Cable Retractor Unit -
0.7kg
Max Load: 0.7kg / 1.5lbs
Max Length: 1.2m / 47"

H01125
Kevlar Cable Retractor Unit
with Auto-Stop - 0.7kg
Max Load: 0.7kg / 1.5lbs
Max Length: 1.2m / 47"

FOR PRODUCT SUPPORT CONTACT:

support@gripps.com | +61 3 8383 9458

WWW.GRIPPS.COM

GRIPPS® Cable Retractor Unit

SAFETY INFORMATION

⚠️ WARNING Before using the GRIPPS® Cable Retractor Units, read all provided safety information pertaining to the use of your Dropped Tool Prevention (DTP) device. **FAILURE TO DO SO COULD RESULT IN INJURY OR DEATH.**

The user of a DTP device bears the responsibility of reading all safety information contained herein. Keep this manual for future reference.

Intended Use:

When used properly, the GRIPPS® Cable Retractor Units can prevent workplace hazards resulting from dropped tools. These may include personal injury and material damage.

GRIPPS® does not approve use of this device for any activities not described in the User Instructions. This device is not intended to be used in any recreational activity, as a personal fall-arrest device or in any other manner not described herein.

⚠️ WARNING Misuse of this device could result in serious injury or death.

Adhere to all manufacturer recommendations regarding the operation and maintenance of this device. For additional information, contact GRIPPS® customer support.

Read and adhere to the following in order to ensure correct operational functionality:

- Your DTP should never be used as a personal fall-arrest device or restraint system.
- Do not use this device with tools that exceed the specified maximum load/weight.
- A DTP device used in applications that exceed the limits of operation specified by the manufacturer should be considered unsafe and should be replaced.
- Do not tether a tool over 2.5kg/5.5lbs directly to your clothing or person.
- Inspect your DTP device before each use.
- Ensure the DTP device is securely connected to a load rated tool connector or anchor point before use.
- Inspect any tool connector point before it is connected to the DTP device.
- Modification of the DTP device voids all warranties and violates manufacturer recommendations.
- Do not use a tool that cannot be connected to your DTP in the manner specified by GRIPPS®.
- It is unsafe to extend the length of the DTP product by any means.
- Do not use this product if it will create an unsafe working environment.
- Use extra precaution around moving machinery, moving parts, electrical hazards, extreme temperatures, chemical hazards, or combustion hazards.
- Avoid contact between the connected Wrist Tether and rough or sharp edges.
- Regularly inspect the Velcro on the Adjustable Wrist-Anchor to ensure it is free from any dust, grime or debris.
- All connected tools and equipment, including connection points, must be compatible for use with this DTP device.

- Always wear appropriate personal protective equipment.
- If a tether has arrested a dropped tool or object, it should be taken out of service and replaced.
- All procedures shown in this instruction are for GRIPPS® Wrist-Anchor products only.

GENERAL USE AND CARE

GRIPPS® Cable Retractor Units are the ultimate compact solution for tethering small tools weighing up to .7kg or 1.5lbs. Available in stainless steel or kevlar, the retraction mechanisms are smooth and precise. The retractors extend up to 1.2m or 4ft, ensuring that your tools are always within reach.


Recommended Use of GRIPPS® Cable Retractor Units:

1. Use the GRIPPS® Kevlar Retractor when using tools that require prolonged use. The Kevlar version contains an auto locking mechanism.
2. Use the GRIPPS® Steel Retractor for tools that require less frequent use such as cutting tools.


Before Use:

Thoroughly inspect your GRIPPS® DTP device before each use. Do not use any component that presents deformities or deterioration.


HOW TO USE / INSTRUCTIONS:

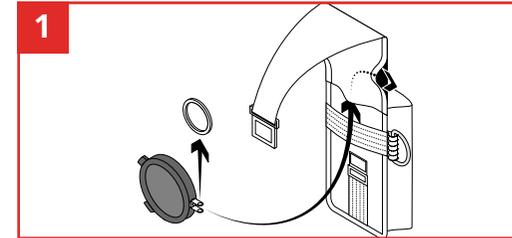


Remove tool ring from Retractor then insert Retractor into holster pocket. Feed end of Reactor cable out of holster pocket.

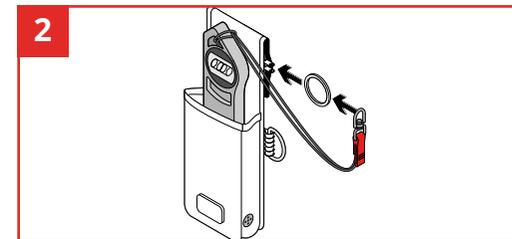

Thread tool ring back onto Retractor. The tool ring should be exposed outside of the holster.

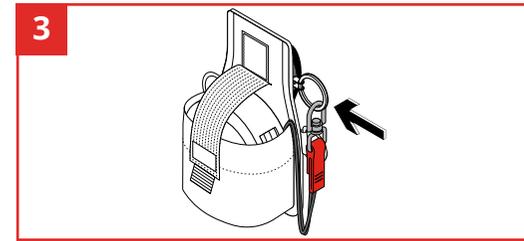

Tether your tool or GRIPPS® Swivel Catch directly to the retractor unit tool ring.

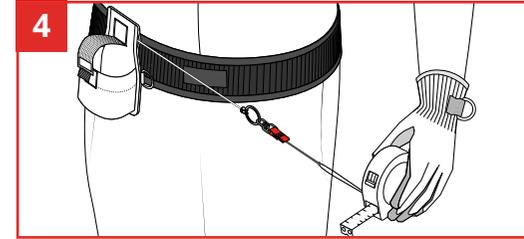

You can now use your Retractor unit with your holster.

After Use Care:

Clean and inspect the Cable Retractor Units, tethers and connected tool. For tougher stains, use warm water and a mild soap or detergent. Do not use again until dry.

Store in a clean and dry environment. Proper care will help to ensure that it will operate effectively and extend its service.

GRIPPS®

linkedin.com/company/grippsglobal

facebook.com/grippsglobal

youtube.com/@gripps3480grippsglobal

instagram.com/grippsglobal