


GRIPPS®

GRIPPS® Technical Specification Sheet.

GRIPPS® Gap Wrap Model: H06010, H06011, H06012

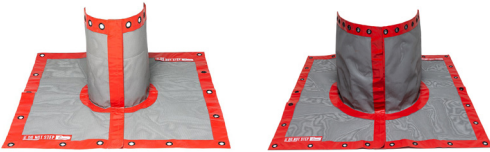

H06010
Gap Wrap 12"
Pipe Diameter Sizes:
50mm - 300mm / 2" - 12"
Length: 1100mm / 43"
Width: 1100mm / 43"
Height: 500mm / 12"

H06011
Gap Wrap 24"
Pipe Diameter Sizes:
50mm - 610mm / 2" - 24"
Length: 1400mm / 55"
Width: 1400mm / 55"
Height: 650mm / 24"



H06012
Gap Wrap 36"
Pipe Diameter Sizes:
50mm - 914mm / 2" - 36"
Length: 1700mm / 67"
Width: 1700mm / 67"
Height: 800mm / 36"

FOR PRODUCT SUPPORT CONTACT:

support@grippsglobal.com | +61 3 8383 9458

WWW.GRIPPS.COM

GRIPPS® Gap Wrap

SAFETY INFORMATION

⚠️ WARNING Before using the GRIPPS® Gap Wraps, read all provided safety information pertaining to the use of your Dropped Tool Prevention (DTP) device. **FAILURE TO DO SO COULD RESULT IN INJURY OR DEATH.**

The user of a DTP device bears the responsibility of reading all safety information contained herein. Keep this manual for future reference.

Intended Use:

When used properly, the GRIPPS® Gap Wraps can prevent workplace hazards resulting from dropped tools. These may include personal injury and material damage.

GRIPPS® does not approve use of this device for any activities not described in the User Instructions. This device is not intended to be used in any recreational activity, as a personal fall-arrest device or in any other manner not described herein.

⚠️ WARNING Misuse of this device could result in serious injury or death.

Adhere to all manufacturer recommendations regarding the operation and maintenance of this device. For additional information, contact GRIPPS® customer support.

Read and adhere to the following in order to ensure correct operational functionality:

- Your DTP should never be used as a personal fall-arrest device or restraint system.
- Do not use this device with tools that exceed the specified maximum load/weight.
- A DTP device used in applications that exceed the limits of operation specified by the manufacturer should be considered unsafe and should be replaced.
- Do not tether a tool over 2.5kg/5.5lbs directly to your clothing or person.
- Inspect your DTP device before each use.
- Ensure the DTP device is securely connected to a load rated surface using all available anchor points before use.
- Inspect any tool connector point before it is connected to the DTP device.
- Modification of the DTP device voids all warranties and violates manufacturer recommendations.
- Do not use a tool that cannot be connected to your DTP in the manner specified by GRIPPS®.
- Do not use this product if it will create an unsafe working environment.
- Ensure tethers do not become entangled with other workers, yourself or surrounding objects. Leave enough space between yourself and any hazards so that a tool on a fully extended tether can swing unobstructed should it fall.
- Avoid contact between tethers and rough or sharp edges.
- Use extra precaution around moving machinery, moving parts, electrical hazards, extreme temperatures, chemical hazards, or combustion hazards.
- All connected tools and equipment, including connection points, must be compatible for use with this DTP device.

- Always wear appropriate personal protective equipment.
- If a tether has arrested a dropped tool or object, it should be taken out of service and replaced.
- All procedures shown in this instruction are for GRIPPS® Modular Drop Mat products only.

GENERAL USE AND CARE

The GRIPPS® Gap Wrap 12" is a unique encapsulation device that prevents objects from being accidentally dropped within work site voids. The mesh of the Gap Wrap 12" encases pipes from 2" to 12" (50mm to 305mm) in diameter and uses heavy-duty velcro strips to tighten the opening to tubes.


Recommended Use of GRIPPS® Modular Drop Mats:

- Only use in combination with GRIPPS® Tethers.
- Compatible with the GRIPPS® Mule Bag for easy transportation.
- Ensure that tools are tethered to one of the 8, D-Ring Tether Anchor points on the Modular Drop Mat when working at height.
- Anchor the Modular Drop Mat using all anchors on the bottom side of the mat using Zip Ties.

Before Use:


Thoroughly inspect your GRIPPS® DTP device before each use. Do not use any component that presents deformities or deterioration. Inspect all material including the carabiner and tether.

HOW TO USE / INSTRUCTIONS:

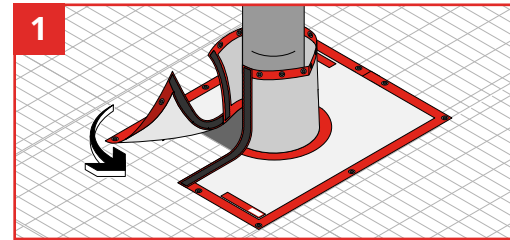


Surround pipe with Gap Wrap. Overlap central Velcro fasteners strips.

* Do not use on a void that exceeds 100mm from the pipe.

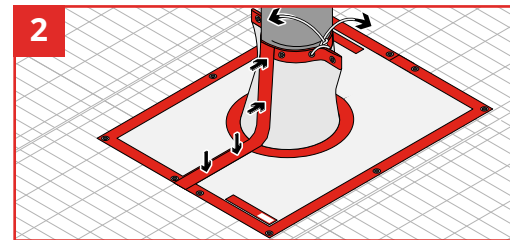

Ensure the fastener strip is firmly pressed all the way along from top to bottom. Fasten all eyelets around piping with suitable ties.

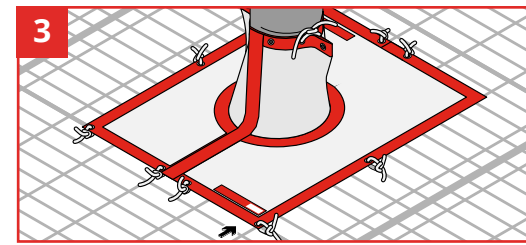

Fasten all outer eyelets to gridmesh with suitable ties. Ensure no excessive amount of ties are exposed that may cause a trip hazard.

After Use Care:

Clean and inspect the GRIPPS® Gap Wrap. For tougher stains, use warm water and a mild soap or detergent. Do not use again until dry.


Store in a clean and dry environment. Proper care will help to ensure that it will operate effectively and extend its service.

SPECIFICATION

SKU	SIZE	LENGTH	WIDTH	HEIGHT
H6010	12"	43" 1100mm	43" 1100mm	12" 500mm
H6011	24"	55" 1400mm	55" 1400mm	24" 650mm
H6012	36"	67" 1700mm	67" 1700mm	36" 800mm

SKU	PIPE DIAMETER SIZES	FIRE RATING
H06010	2" - 12" 50 mm - 305 mm	Fire Resistant to AS1530.3
H06011	2" - 24" 50 mm - 610 mm	Fire Resistant to AS1530.3
H06012	2" - 36" 50 mm - 914 mm	Fire Resistant to AS1530.3

GRIPPS®



linkedin.com/company/grippsglobal

youtube.com/@gripps3480grippsglobal

facebook.com/grippsglobal

instagram.com/grippsglobal