

GRIPPS®

GRIPPS® Technical Specification Sheet.

GRIPPS® Gap Mat
Model: H06030



H06030
Gap Mat
Length: 2500mm / 98"
Width: 1000mm / 39"
Fire-rated to AS1530.3.

FOR PRODUCT SUPPORT CONTACT:

support@gripps.com | +61 3 8383 9458

WWW.GRIPPS.COM

GRIPPS® Gap Mat

SAFETY INFORMATION

⚠️ WARNING Before using the GRIPPS® Gap Mats, read all provided safety information pertaining to the use of your Dropped Tool Prevention (DTP) device. FAILURE TO DO SO COULD RESULT IN INJURY OR DEATH.

The user of a DTP device bears the responsibility of reading all safety information contained herein. Keep this manual for future reference.

Intended Use:

When used properly, the GRIPPS® Gap Mats can prevent workplace hazards resulting from dropped tools. These may include personal injury and material damage.

GRIPPS® does not approve use of this device for any activities not described in the User Instructions. This device is not intended to be used in any recreational activity, as a personal fall-arrest device or in any other manner not described herein.

⚠️ WARNING Misuse of this device could result in serious injury or death.

Adhere to all manufacturer recommendations regarding the operation and maintenance of this device. For additional information, contact GRIPPS® customer support.

Read and adhere to the following in order to ensure correct operational functionality:

- Your DTP should never be used as a personal fall-arrest device or restraint system.
- Do not use this device with tools that exceed the specified maximum load/weight.
- A DTP device used in applications that exceed the limits of operation specified by the manufacturer should be considered unsafe and should be replaced.
- Do not tether a tool over 2.5kg/5.5lbs directly to your clothing or person.
- Inspect your DTP device before each use.
- Ensure the DTP device is securely connected to a load rated surface using all available anchor points before use.
- Inspect any tool connector point before it is connected to the DTP device.
- Modification of the DTP device voids all warranties and violates manufacturer recommendations.
- Do not use a tool that cannot be connected to your DTP in the manner specified by GRIPPS®.
- Do not use this product if it will create an unsafe working environment.
- Ensure tethers do not become entangled with other workers, yourself or surrounding objects. Leave enough space between yourself and any hazards so that a tool on a fully extended tether can swing unobstructed should it fall.
- Avoid contact between tethers and rough or sharp edges.
- Use extra precaution around moving machinery, moving parts, electrical hazards, extreme temperatures, chemical hazards, or combustion hazards.
- All connected tools and equipment, including connection points, must be compatible for use with this DTP device.

- Always wear appropriate personal protective equipment.
- If a tether has arrested a dropped tool or object, it should be taken out of service and replaced.
- All procedures shown in this instruction are for GRIPPS® Modular Drop Mat products only.


GENERAL USE AND CARE

The GRIPPS® Gap Mat is a durable, fire-resistant drop-prevention mat with dedicated anchor points for tethering. With 6x D-Rings covering the mat, tools or equipment are easily attached, providing several anchor points. The Gap Mat is easily secured using cable ties (or similar ties) with the 22 available eyelets surrounding the edges. The Gap Mat allows personnel to work on grid mesh platforms whilst protecting their tools and equipment from falling through the grating and is reusable thanks to the highly durable mesh.


Before Use:

Thoroughly inspect your GRIPPS® DTP device before each use. Do not use any component that presents deformities or deterioration. Inspect all material including the carabiner and tether.


HOW TO USE / INSTRUCTIONS:

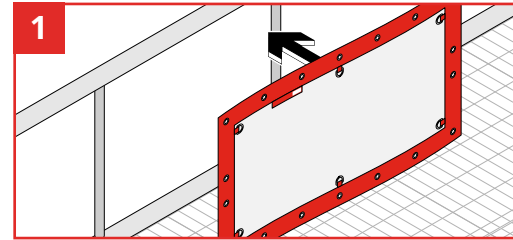

For handrail use, place Gap Mat against handrail and apply ties to eyelets. Ensure Gap Mat is flush with floor.

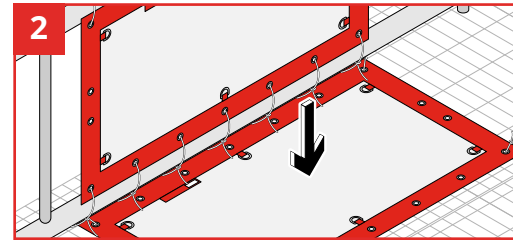

For use on gridmesh flooring, lie Gap Mat flat and apply ties to eyelets.

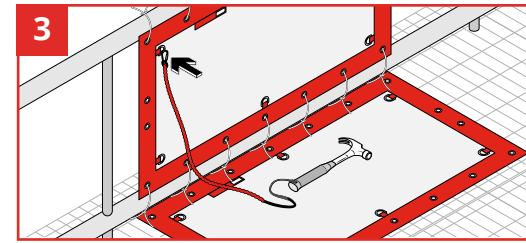

Attach tethers to surrounding D-Rings as needed.

*Do not exceed D-Ring maximum load.

After Use Care:

Clean and inspect Gap Mat. For tougher stains, use warm water and a mild soap or detergent. Store in a clean and dry environment. Proper care will help to ensure that it will operate effectively and extend its service.

GRIPPS®



linkedin.com/company/grippsglobal



youtube.com/@gripps3480grippsglobal



facebook.com/grippsglobal



instagram.com/grippsglobal