

# GRIPPS®

## GRIPPS Technical Specification Sheet:

### GRIPPS® Nippers/Pliers Connector Pack 1.0kg/2.2lbs Models: H07003



**H07003**  
Nippers/Pliers Connector Pack  
1.0kg/2.2lbs  
**Max Load:** 1.0kg | 2.2lbs  
**Max Tether Length:** 1.3m | 51"  
**ANSI/ISEA 121-2018 COMPLIANT**

#### FOR PRODUCT SUPPORT CONTACT:

support@gripps.com | +61 3 8383 9458

WWW.GRIPPS.COM

## GRIPPS® Nippers/Pliers Connector Pack 1.0kg/2.2lbs

### SAFETY INFORMATION

**⚠️ WARNING** Before using the GRIPPS® Nippers/Pliers Connector Pack, read all provided safety information pertaining to the use of your Dropped Tool Prevention (DTP) device. **FAILURE TO DO SO COULD RESULT IN INJURY OR DEATH.**

The user of a DTP device bears the responsibility of reading all safety information contained herein. Keep this manual for future reference.

#### Intended Use:

When used properly, the GRIPPS® Nippers/Pliers Connector Pack can prevent workplace hazards resulting from dropped tools. These may include personal injury and material damage.

GRIPPS® does not approve use of this device for any activities not described in the User Instructions. This device is not intended to be used in any recreational activity, as a personal fall-arrest device or in any other manner not described herein.

**⚠️ WARNING** Misuse of this device could result in serious injury or death.

Adhere to all manufacturer recommendations regarding the operation and maintenance of this device. For additional information, contact GRIPPS® customer support.

Read and adhere to the following in order to ensure correct operational functionality:

- Your DTP should never be used as a personal fall-arrest device or restraint system.
- Do not use this device with tools that exceed the specified maximum load/weight.
- A DTP device used in applications that exceed the limits of operation specified by the manufacturer should be considered unsafe and should be replaced.
- Do not tether a tool over 2.5kg/5.5lbs directly to your clothing or person.
- Inspect your DTP device before each use.
- Ensure the DTP device is securely connected to a load rated tool connector or anchor point before use.
- Inspect any tool connector point before it is connected to the DTP device.
- Modification of the DTP device voids all warranties and violates manufacturer recommendations.
- Do not use a tool that cannot be connected to your DTP in the manner specified by GRIPPS®.
- It is unsafe to extend the length of the DTP product by any means.
- Do not use this product if it will create an unsafe working environment.
- Use extra precaution around moving machinery, moving parts, electrical hazards, extreme temperatures, chemical hazards, or combustion hazards.
- Avoid contact between any connected tethers and rough or sharp edges.
- All connected tools and equipment, including connection points, must be compatible for use with this DTP device.
- Always wear appropriate personal protective equipment.

- If a tether has arrested a dropped tool or object, it should be taken out of service and replaced.
- All procedures shown in this instruction are for GRIPPS® Tool Catch & V-Gripp Tape products only.

### GENERAL USE AND CARE

With the combination of GRIPPS® Tool Catches and V-Gripp Tape, you can instantly create a reliable and load-rated Tool Connector Point for various tools. The V-Gripp tape boasts a self-vulcanizing feature, eliminating the need for adhesives to ensure a secure grip. To further protect against wear and tear, the pack also includes Gripp Shrink, providing an added layer of durability. The included Swivel Catch helps minimise tension when connected back to a retractor and also permits 360 degree range of motion during tool usage.


#### Recommended Use of GRIPPS® Nippers/Pliers Connector Pack:

1. Use the Tool Catch (H01005 = 12mm-55mm / 0.47" x 2.1") for tools that weigh up to 1.0kg/2.2lbs.
2. Use Tool Catches on tools that do not have an existing Tool Connector point.
3. Do not use a Tool Catch if the placement of the Tool Catch makes the tool unsafe to use.
4. If working in electrical environments, use the H01007 model non-conductive Tool Catch.
5. Never install a Tool Catch on the tapered portion of a tool.
6. Never use Gripp Shrink as a replacement for V-Gripp Tape. Only use Gripp Shrink where V-Gripp Tape has already been applied.
7. Only use V-Gripp Tape with GRIPPS® Tool Catches & Tool Hitch's.


#### Before Use:

Thoroughly inspect your GRIPPS® DTP device before each use. Do not use any component that presents deformities or deterioration. Before use: Thoroughly clean tool of any soiling and grease prior to application

### HOW TO USE / INSTRUCTIONS:

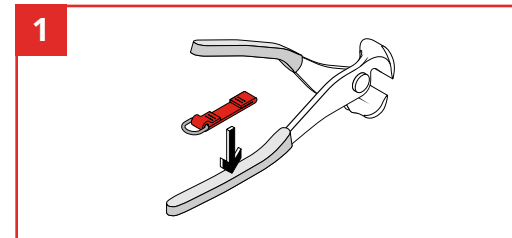


Place Tool Catch towards the base of nips/pliers handle.

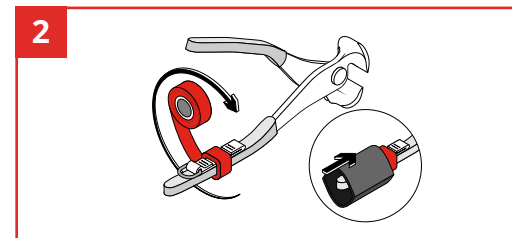


Wrap the tape around the tool while stretching the tape to activate the self-vulcanizing feature, creating a secure connection. Ensure

raised 'catch' is not covered by the tape. Pull on Tool Catch with force to test application.

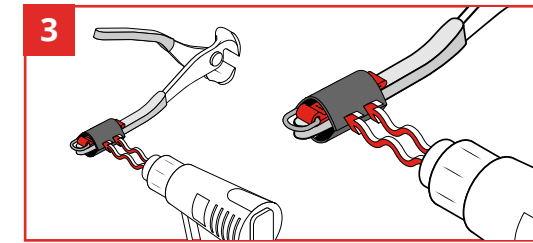

Slide Gripp Shrink over Tool Catch and V-Gripp Tape. Then apply heat gun over V-Gripp Tape, covering all areas until fitted securely.

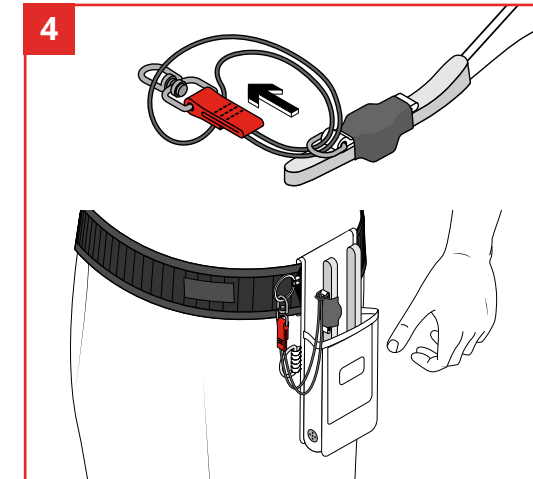

Apply the Swivel Catch, by passing it through the D-Ring and choking it back on itself. Pull tightly.

#### After Use Care:

Clean and inspect the Nippers/Pliers Connector Pack and any connected tethers. For tougher stains, use warm water and a mild soap or detergent. Do not use again until dry.

Store in a clean and dry environment. Proper care will help to ensure that it will operate effectively and extend its service.

## GRIPPS®

linkedin.com/company/grippsglobal

facebook.com/grippsglobal

youtube.com/@gripps3480grippsglobal

instagram.com/grippsglobal