




SCREWLOCK CABLE TOOL CONNECTOR

CODE: H01030 | H01031 | H01032 | H01033 =

ANSI/ISEA 121-2018 COMPLIANT



Create your secure tool connection point by simply threading the Screwlock Cable through an existing hanghole/ slot in your tool, and screw closed. Add a drop of thread-locking compound before you screw shut to create a permanent, load rated connection point on your tools.

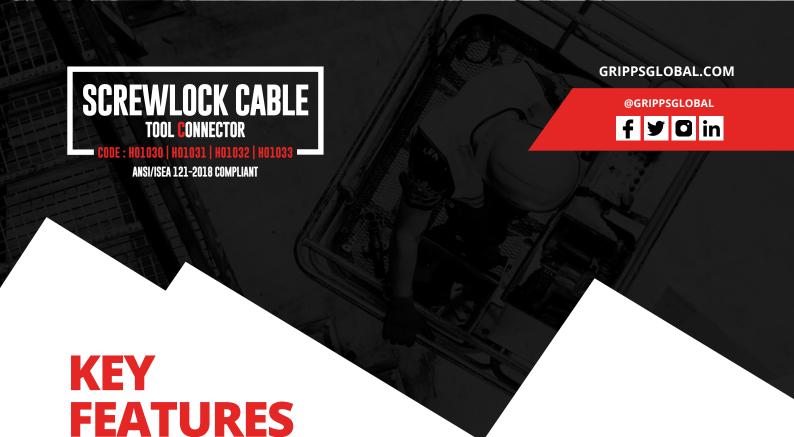

PU coated aircraft grade steel provides a hard wearing tool anchor that's easy to maintain

Fully load rated and certified

Easy installation process that can be performed on-site

Available in two sizes

Can be locked permanently using thread locking compounds



SPECIFICATIONS



CODE	MAD LOAD	WIDTH	LENGTH
H01030	1KG / 2.2LBS	3MM / 0.1"	120MM / 4.7"
H01031	1KG / 2.2LBS	3MM / 0.1"	150MM / 6.0"
H01032	2KG / 4.4LBS	4MM / 0.15"	160MM / 6.3"
H01033	2KG / 4.4LBS	4MM / 0.15"	200MM / 8.0"