
## 4 (HANNEL SLIMDIMMER

## 4 CHANNEL X 5 AMP DMX512 DECODER



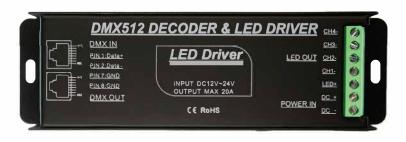


Introducing our economical 4-channel standalone DMX Controller.


This unit converts standard DMX-512/1990 standard digital signal and converts it into four dimmable PWM controller channels. It utilises standard RJ45 connectors for DMX signal which allows for its compact size as well as its light-weight design.

Its high-frequency dimming allows for use in demanding environments including film, television, and commercial applications.

## TECHNICAL SPECIFICATIONS

Supply Voltage:	12V / 24VDC
Output Power:	5 Amps per Channel (20A MAX)
	240 Watts / 480 Watts
Refresh Rate:	Veriable 5000Hz
Connections:	DMX IN/OUT: RJ45
	POWER IN/OUT: Terminal Block
PWM Resolution:	8bit
Temperature:	0°C to +70°C
Gross Weight:	220g
IP Rating	IP40





for futher information or pricing please contact moss LED or your local authorized reseller the information contained in this spec sheet is subject to change please consult our website for the most up-to-date information



www.mossled.com 1.800.924.1585 - 416.463.6677 - info@mossled.com 313 Evans Avenue, Toronto, Ontario, Canada, M8Z 1K2

