
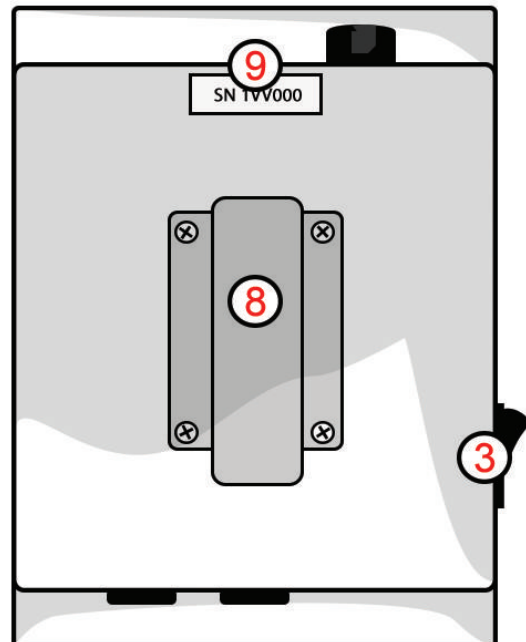
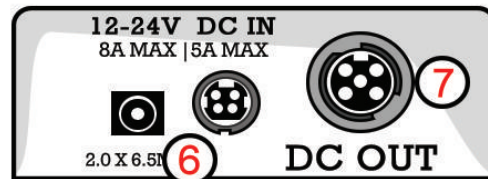


LUXBOX 2.0

Manual

2 Channel High Precision, Flicker-Free Dimming
& Control for Low Voltage LED Products

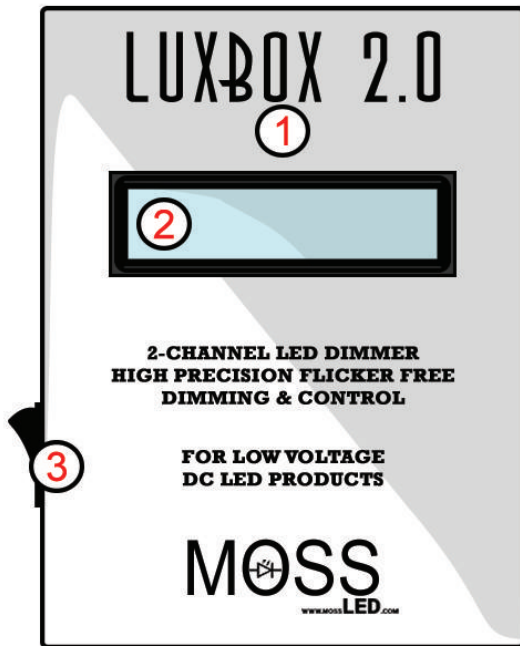

① Rugged metal construction
Over Hang Protection

② Back-lit LCD Readout
0 -100% dimming control

③ Power switch (ON/OFF)

④ Mode Selector

Mode 1: Two Channel Dimmer Control
Mode 2: Color Temperature Adjustment

⑤ Push-lock Rotary Dials

⑥ Input 12V to 24V DC
Locking 4-Pin DC Connector
Standard DC Barrel Connector

⑦ Locking 5-Pin DC
Output Connector

⑧ Belt clip adds versatility

⑨ Serial Number



Input
 15A MAX
 180W @ 12V DC
 360W @ 24V DC



Output
 12V to 24V DC @ 7.5A/Channel




Dimensions
 L 13.3cm
 W 9.2cm
 H 4.0cm



Temperature Range
 -40°C to +125°C




Weight
 274g



Packaging Dimensions
 L 17.0cm
 W 11.0cm
 H 5.8cm

 370g

DC INPUT CONNECTORS



1 & 4 + V DC
 2 & 3 - V DC

DC OUTPUT CONNECTORS

5-Pin Female DC Connector



4	WHITE	Power	+V DC
3	YELLOW		
1	RED	Channel 1	Tungsten
5	BLUE		
2	BLACK	Channel 2	Daylite

Contact Us



27 Davies Ave. Unit 2
 M4M 2A9
 Toronto, Ontario, Canada



Toll Free: 1.800.924.1585
 GTA Local: 416.463.MOSS (6677)
 email: info@mossled.com
www.mossled.com



DO NOT CUT OR SHORT CIRCUIT FLEXLED PRODUCTS WHILE PLUGGED INTO THE LUXBOX. PERMANENT DAMAGE MAY OCCUR.



FOR WARRANTY LUXBOX IS TO BE USED ONLY WITH MOSS LED BRAND PRODUCTS.