



A-B

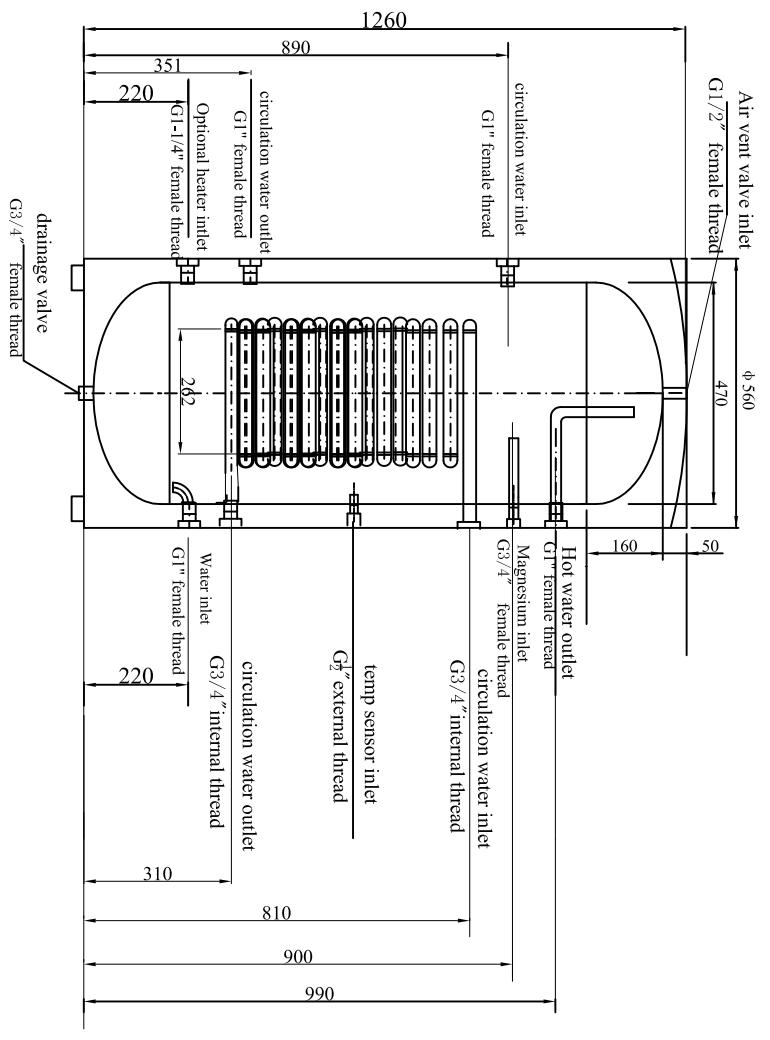

Technical detail:

- 1、Carton packing size: 650×650×1330mm
- 2、Inner tank SUS 304 δ=1.5, outer case galvanized sheet δ=0.50; polyurethane foam insulation 45mm,
- 3、Inner tank test pressure 1.2Mpa, last 20 minutes without pressure drop and distortion
- 4、The rated pressure of the tank is 0.7Mpa.A pressure relief valve not bigger than 0.7Mpa and non-return valve is necessary to install at cold water inlet
5. Internal coil SUS304 φ 25, 22m

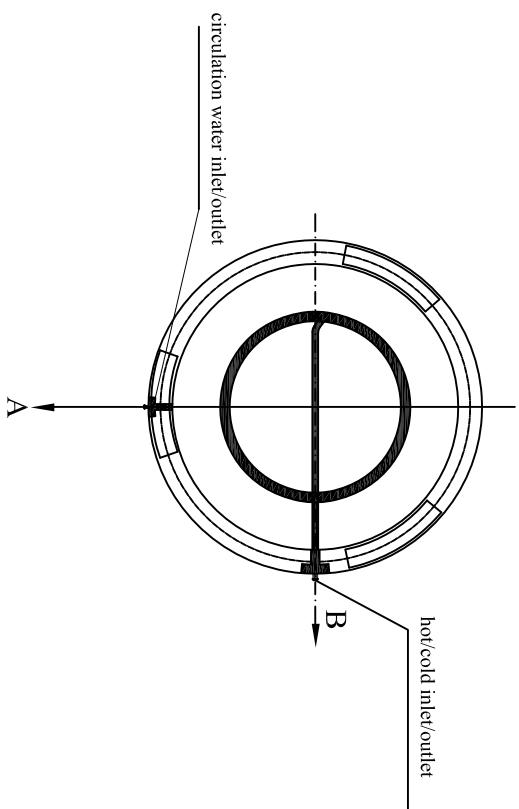

200L tank with coil